

ICCESEN-2025

**12th International Conference on Computational
and Experimental Science and Engineering**

**17-20 October 2025
Kemer-Antalya--TURKEY**

ABSTRACT BOOK

Editors:

Prof.Dr. İskender AKKURT

Dr.Sabiha Anas BOUSSAA

www.iccesen.org

TABLE OF CONTENTS

ii

TABLE OF CONTENTS

TABLE OF CONTENTS	ii
SCIENTIFIC PROGRAMME FOR ICCESEN-2025	1
PRESENTATIONS IN ICCESEN-2025	14
Optimizing roasting processes in rotary kilns for iron-nickel ores	14
FOREWORD	21
ORGANISATION COMMITTEE	22
SCIENTIFIC COMMITTEE	23
INVITED SPEAKERS	25
Sustainable Development in the Global Rankings	26
Artificial Intelligent as a Concept or as a System: utilizing and conceptualizing AI in Industrial and health care	27
Advancing High-Performance Solar Cells with Ca ₃ NCI ₃ Perovskite A ₃ BX ₃ -Type Absorbers for Next-Generation Photovoltaics	28
Regime-switching models via stochastic optimal control & robust control theory, with applications in finance and insurance	29
Trustworthy AI-enabled Sustainable Technologies	30
PRESENTATION	31
Rıza Fatih MENDİLCİOĞLU Opportunities and limitations of artificial intelligence-based visualisation tools in architectural representation	32
Zarife BAJRAKTARI GASHI, Izet IBRAHIMI Optimizing roasting processes in rotary kilns for iron-nickel ores	33
Macroseismic evaluation of the location in Rahovec for the installation of solar panels	34
Antioxidant activity of essential oils and ethanolic extracts of four medicinal plants alone and in combination	35
Towards a Bio-Inspired Approach for the Optimization of Product Distribution in a Transport Company	36
Integrating Computational Modeling with Experimental Methods in Bending Behavior Analysis of Round Rods	37
Application of flory patterson theory on the volumetric properties of liquid mixtures 1,2-dichloroethane with diethylether and dispropylether	38
Explicit formula and Prime Number Theorem for zeta Function on Function Field and Its Applications	39
Deep Neural Networks For Transmission Line Fault Diagnosis	40
Electrochemical characterization of a composite (PANI/PEDOT:PSS) for application in supercapacitors	41
Prediction of compressive strength of concrete modified with marble waste powder using artificial intelligence model	42
Modeling the thermal conductivity of some metals	43
Application of Artificial Intelligence for Fault Diagnosis in Bevel Gears Using Vibration Analysis	44
Analysis and Numerical Simulation of a 316L Stainless Steel Femoral Plate	45
Stepped Double-Slope Solar Still: Comparative Study between Analytical Simulation and Experimental Validation	46
Study of the probiotic potential and anti-Staphylococcus aureus power of Lactobacillus strains	47

Finite Element Analysis of Elasto-plastic Material Model for Cardiovascular Stent.....	48
Study of Nano-Biomaterials for Bone Regeneration by TPMS Lattice Structure	49
Research on the novel quantum phenomena in infinite-layer nickelate unconventional superconducting films.....	50
CTX-M-15 ESBL-Producing <i>E. coli</i> Isolated from Pigeons in Bejaia, Algeria.....	51
Modeling and Experimental Analysis of Drying Parameters Affecting <i>Pistacia Atlantica</i> Leaf Preservation.....	52
Androgen Receptor (AR) Mutations and Prostate Cancer Risk in the Jordanian Population.....	53
Formulation of a Cosmetic Cream with Anti-Inflammatory Effect Based on Medicinal Plants...	54
The two-stage (630 and 600 Ma) emplacement of the Amsel post-collisional Pan-African high-K calc-alkaline batholith, Hoggar, Algeria.....	55
Damage Investigation and Finite Element Modeling of Sandwich Panels Subjected to Multiple Low-Energy Impacts.....	56
Integrating Genetic Algorithms and Decision Trees for Efficient Fault Diagnosis in Rotating Machinery.....	57
Finding the Best Crimping Conditions for Metal Cans through Experimental Testing.....	58
An Embedded Framework for Smart Cloud Architecture Enabling Adaptive Business-Driven Solutions.....	59
Impact of Scan Rates on the Redox Behavior of Paracetamol at NiO/GrE.....	60
Assessment of the biochemical attributes of C4 photosynthesis in <i>Boerhavia</i> (Nyctaginaceae), a proposed model of C4 subtypes metabolic cooperation.....	61
Advancing High-Performance Solar Cells with Ca ₃ NCI ₃ Perovskite A3BX3-Type Absorbers for Next-Generation Photovoltaics	62
Phase Pattern from Three Cylindrical Waves Using the Moiré Method.....	63
Green corrosion inhibitors in the oil sector - Reality and Prospects.....	64
A Compact high isolation of MIMO UWB Antenna with Band Notched Characteristics for WLAN Application.....	65
The potential of information technology in construction project management.....	66
Modeling Cyclonic Development on the Lee Side of West-Southwest Kosovo.....	67
Artificial Intelligence in Monitoring and Diagnostics in Civil Engineering.....	68
Improved Shale Microcrack Prediction via Plasticity-Modified Model.....	69
Comparison of Intensity Modulated Radiotherapy and Proton Therapy Treatment of Head and Neck Cancer.....	70
Development and characterization of a PVA-ZnO AND PVA- CHITOSAN-ZnO nanocomposite dressing with antibacterial activity.....	71
Integrating Digital Twins in Architecture, Engineering and Construction.....	73
Study on the discontinuous fracture process zone leading to multiple parallel fractures... ..	74
Experimental Study on Fracture Morphology Evolution in Horizontal Well Refracturing Based on FBG Optical Fiber Monitoring.....	75
Enhancement of the DC Output Voltage of a Multilevel Boost Converter Using LQR Control.	76
Impact of Traffic-Induced Vibrations on People in Buildings: A Neural Network Study.....	77
Geometry-Driven Optimization of Oil–Water Imbibition in Capillaries.....	78
Welding of Exotic Materials.....	79
A 3D method for evaluating the sphericity of proppant in the field of hydraulic fracturing.....	80
The transformation of the microscopic fracture mechanism of rock induced by confining pressure and its macroscopic fracture response.....	81
Elaboration and study of hybrid material of polyvinyl alcohol / polypyrrole Cu-Ni.....	82
Electrochemical synthesis of polyaniline and his dipping by ions Ni ²⁺	83
Synthesis of chemical polyaniline and his dopage by metallic oxide.....	84

Dual-Pathway Optimization of Supercapacitor Components Using PEDOT-Fe ₃ O ₄ Electrodes and Borate-Enhanced HES Electrolytes.....	85
A Cost-Effective Microwave Route to Borohydroxyapatite: Crystallinity, Elemental Composition, and Vickers Hardness Evaluation.....	86
HYPERHOMOCYSTEINEMIA AND ALZHEIMER'S DISEASE.....	87
HOMA AND TYG INDICES IN PATIENTS WITH METABOLIC SYNDROME: COMPARATIVE STUDY.....	88
A Noise Reduction Evaluation Method for coal petrology CT Images Based on Multi-index Fusion and Dynamic Weight Allocation.....	89
Özel Öklid Lie Grubu SE(2).....	90
The Benefits of Automation in Immunohistochemistry: Efficiency Standardization, and Cost Savings.....	91
Assessment of the oxidative stress on the human health in Algeria.....	92
Molar bands microbiological control of the effectiveness of the disinfection process.....	93
Experimental Research on the Disturbance between Fractures and Crack Propagation in Hydraulic Fracturing of Conglomerates.....	94
Experimental Investigation of Shear Friction Characteristics in Volcanic Rock Under In-Situ Shear-Enhanced Permeability Conditions.....	95
Investigation of an integrated organic rankine cycle combined with water/ lithium bromide absorption chiller for a petroleum process application.....	96
Assessment of the Tram Track Structure Condition Using Impulse Vibroacoustic Testing.....	97
Solving Volterra Fuzzy Integral Equations Using the Fuzzy Sumudu Transform.....	98
Effect of Lubricant Additives on Hybrid Lubrication Performance.....	99
Enhanced Energy Optimization through IoT Smart Metering and AI-Driven Forecasting and Scheduling.....	100
New application for detecting desert soil change based on long-term satellite images.....	101
Hybrid statistical and artificial intelligence approach for forecasting wind speeds energy on the west coast of Algeria.....	102
Sustainable Sensor for Monitoring and Deactivating Waterborne Pathogens in Contaminated Water Sources using fuctionileased metal nanoparticles.....	103
Effect of the mass ratio of phosphoric acid on the chemical impregnation of a vegetal waste for the preparation of a porous material.....	104
Green Synthesis of Mesoporous Activated Carbon from Plant Waste for Azo Dye Removal in Water Treatment	105
Synergistic Evaluation of Ionizing Radiation Shielding in Novel Lead-Free Alloys Using Geant4 MC toolkit.....	106
Retarding Effect of the Mediating Sulfane (-S-) Group on Chelation Efficacy of Thiolic-Sulfur Toward Mercury in 2-(2-Mercaptothiazol-5-yl) acetic acid Derivative. DFT-Theoretical Study.....	107
Learning from Neutrons: Machine Learning and Monte Carlo Synergy in Shielding Design....	108
Contribution to the study of the chemical composition and antioxidant activity of propolis from two regions in northern Algeria.....	109
Numerical methods used in fire-protection simulations – a review.....	110
Microcontroller-Guided DIBH Phantom: A Low-Cost Training Tool for Patient Positioning in Radiotherapy.....	111
Glioblastoma Multiforme: Case Report, Treatment, and Prognosis.....	112
The Potential and Difficulties of Using 3D Printing to Create Vaginal Applicators for Brachytherapy.....	113

Optical Performance and Clinical Relevance of CAD/CAM Ceramic Materials.....	114
Validation of the individual monitoring system for radiation workers through intercomparison tests.....	115
Microbiological safety of artisanal honey: Detection of <i>C. botulinum</i> and other bacteria in Kosovo.....	116
Determination of Physico-Chemical Properties and Heavy Metals Lead (Pb), Cadmium (Cd), Aluminum (Al), Nickel (Ni), and Chromium (Cr) in Cabbage Cultivated in the Region of Prishtina and Prizren.....	117
Valorization of farming waste in a composite material: mechanical characterization.....	118
Development and optimization of a smart wearable sensor for monitoring cardiac and respiratory signals.....	119
Risk Management in Islamic Financial Systems: Alignment with International Standards.....	120
Chemical study and valorization of the essential oil of <i>Teucrium polium</i> L. as a bioactive material for the development of a natural pharmaceutical formulation with anti-inflammatory purposes.....	121
Biogenic Synthesis and Characterization of Zinc Oxide and Titanium Dioxide Nanoparticles Mediated by Plant Extracts.....	123
Electrical Resistivity and Minority Carrier Lifetime Distribution in Directional Solidification of Silicon Ingot.....	125
Nickel Zinc thin film for Hydrogen production.....	126
Bismuth oxide electrode for CO ₂ conversion application.....	127
Processing of recovery Si down to purified Si powder from SIREVIVAL PROJECT.....	128
Strengthening Radiation Safety Education in the Pre-Internship Health Associate Degree Curriculum.....	129
Internal Radiation Alarm: Safety Awareness in Future Healthcare Workers.....	130
Assessment of cancer patients' concerns during radiotherapy: a radiation oncology perspective.....	131
Radiation safety and managerial ethical principles in healthcare services.....	133
Evaluation of anxiety levels in cancer patients undergoing ionizing radiation therapy due to side effects.....	134
Manufacturing and Printing of Urogenital System Organs.....	135
Radon Concentration Variations in the Adalar District, Istanbul.....	136
PET/CT versus Conventional Imaging in Cancer Diagnosis: Evidence from a Comprehensive Meta-Analysis.....	137
Organ-Specific Dosimetry in Ovarian Vein Embolization.....	138
Influence of Non-Homogeneous Interphases on the Elastic Behavior of Polymer Nanocomposites – A micromechanical Modeling	139
Multiphysics Micromechanical Modeling of PVDF/BaTiO ₃ Composites with Strain-Induced Phase Transformation	140
Therapeutic education of patients in pharmacies:current states.....	141
Design of permanent magnets for sinusoidal waveform of airgap induction in slotless synchronous machines.....	142
Mechanical and microstructural study of silica intended for photovoltaic silicon production...	144
Valorisation of Algerian quartz vein deposits as source of energy.....	145
Doğal Su Kaynaklarındaki Toplam Organik Karbon Değişimlerinin Mevsimsel Analizi.....	146
Mikroalga destekli s- Triazin Bileşiklerin Sentezi ve Elektrot Yüzeyine Modifiye Edilmesi.....	147
Synthesis of graphene using the hummers method	148

INDEX146

SCIENTIFIC PROGRAMME FOR ICCESSEN-2025

18 October 2025-Saturday

ROOM-1

10.00-11.00	Opening : Prof. Dr. Iskender AKKURT (Chair of ICCESSEN-2025)—Suleyman Demirel University, Isparta / TURKEY
	Session Chair : Dr. Feride KULALI-- Uskudar University, Istanbul / TURKEY
	Invited Speaker 1: Prof.Dr. Mansour Almatarnah – Imam Mohammed Ibn Saud Islamic University-Jordan “The Sustainable University: Empowering Knowledge and Shaping Global Citizens for a Resilient Future” Invited Speaker 2: Prof.Dr. Madjid FATHI – Dept. of EECS University of Siegen, GERMANY “AI & XAI (explainable AI) as a new Paradigms for new society”
11.00-11.30	Group Photo- BREAK

ROOM-1			
11.30-12.30	Session Chair : Dr. Feride KULALI-- Uskudar University, Istanbul / TURKEY		
	6	Zarife BAJRAKTARI GASHI, Izet IBRAHIMI	Optimizing roasting processes in rotary kilns for iron-nickel ores
	13	Bedjou Fatiha, Meddas Meriem and Chekkal Tadjajikt	Antioxidant activity of essential oils and ethanolic extracts of four medicinal plants alone and in combination
	14	Yachba KHEDIDJA, Bouamrane KARIM	Towards a Bio-Inspired Approach for the Optimization of Product Distribution in a Transport Company
	15	Rilinda RAÇI, Latif HASI	Integrating Computational Modeling with Experimental Methods in Bending Behavior Analysis of Round Rods
12.30-14.00	LUNCH---BREAK		

14.00-16.00	21	Amira Aboussalih,Tahar Zarza,Kamel Fedaoui, Karim Arar, Lahcen Mebarki	Fatigue of Food Storage Tanks Under Variable Loads
	26	Kajtaz Billaca	Explicit formula and Prime Number Theorem for zeta Function on Function Field and Its Applications
	27	Chelli ZOUBIR, Tarek KHOUALDIA	Deep Neural Networks For Transmission Line Fault Diagnosis
	31	Naima Boudieb, Mohamed LOUCIF SEIAD , Imad RATI and Imane BENAMMANE	Electrochemical characterization of a composite (PANI/PEDOT:PSS) for application in supercapacitors
	33	Sarra Alioui, Abdelaziz Himour, Moussa Zahzouh, Alex Montagne	Wear and Corrosion behavior of Ni-based alloy coating deposited on steel substrate by thermal flame spraying
	50	Khoualdia Tarek, Chelli Zoubi, Guerti Nasreddin, Lakikza Abdelmalek	Application of Artificial Intelligence for Fault Diagnosis in Bevel Gears Using Vibration Analysis
	52	Ayşenur SEKİN	Gelişmekte Olan Ülkelerde Elektrik Tüketimi
	53	Karima BOUKARI, Fatima BRIK, Zahia KHALDOUNA	Milling Surface Roughness Prediction Based on spectral feature and Machine Learning
	58	Samia Hamma-Faradji, Lylia Ouarabi, Amel Ait Meddour,Ghania Zidi, Liza Ouarabi ,wissam Hafir,Syilia Terki ,Samia Benfattoum, Rachid adjebl	Study of the probiotic potential and anti-Staphylococcus aureus power of Lactobacillus strains
	59	Hamza BENNACEUR, Hacene AMEDDAH	Finite Element Analysis of Elasto-plastic Material Model for Cardiovascular Stent
16.00-16.15	BREAK		
16.15-18.00	64	Qiang Zhao, Ting-Na Shao, Rui Liu, Zhi-Ping Yin, Shi-Jie Yang, Jia-Cai Nie	Research on the novel quantum phenomena in infinite-layer nickelate unconventional superconducting films
	68	GHAROUT-SAIT Alima, SAIT-DI Sabrina, MENDIL Ouidad, MEHIDI Imene, MANSEUR Lyticia, BELLIL Dassine, DJOUDI Ferhat	CTX-M-15 ESBL-Producing E. coli Isolated from Pigeons in Bejaia, Algeria
	72	Semsettin KILINÇARSLAN, Mahamat Wardougou LONY, Nuri İŞILDAR	Effect of Waste Material Utilization in Geopolymer Concrete on Physical and Mechanical Properties
	289	Abdullah ALPAY, Hakan AKYILDIRIM	A study on the gamma-ray attenuation parameters for concretes containing zeolite mineral
	290	Betul CETIN, Melek GUL	Investigation of Gamma Ray Shielding Properties of TiO2 Thin Films with PMMA Prepared by Spin Coating Method
	84	Thagirarani MUNIANDY, Che Zalina ZULKIFLI, Fazilat KODIROVA, Nor Asiah RAZAK, Okta NURIKA, Jakhongir SHOMUTALOV, Mad Helmi AB. MAJID, Zunnunova Umilda GULOMOVNA	An Embedded Framework for Smart Cloud Architecture Enabling Adaptive Business-Driven Solutions
	92	Mokhtar BENARIOUA, Nora Bouzeghaia, Imane ABDOU, Mahieddine NAOUN	Green corrosion inhibitors in the oil sector - Reality and Prospects

	93	Nahal MOURAD, Sahraoui YACINE, Moumeni CHAOUKI	Assessing the Maintenance Impact on the Operational Reliability of a Wastewater Treatment Plant (WWTP)
	94	Hadjila BALIT, Mohamed Said BOUTAANI, Youcef KHALFAOUI, Mohand Akli SAHALI	Influence of Voids and Microstructural Parameters on the Mechanical Performance of Al/Graphene Composites: Multiscale Modeling and Optimization
	98	Zine Ghemari, Salah Belkhiri, Abdeslam Hocini	Improving the Accuracy and Efficiency of Capacitive Sensors via Dynamic Frequency Margin Modeling
	102	Riyadh Muhaidat, Mazhar Al Zoubi, Muath Al-Qudah, Mohammad Oqlat, Athena McKown, Rana Al-Kfoof, Khaldoun J. Al-Hadid	Assessment of the biochemical attributes of C4 photosynthesis in Boerhavia (Nyctaginaceae), a proposed model of C4 subtypes metabolic cooperation

	ROOM-2		
11.30-12.30	Session Chair : Dr. Berra Seda SARIHAN – Okan University-Istanbul-Turkey		
	155	Gülşah ÇELİK GÜL, Şeymanur KÖSE, Ayşe Hatun POYRAZ, Seda BEYAZ	Dual-Pathway Optimization of Supercapacitor Components Using PEDOT-Fe ₃ O ₄ Electrodes and Borate-Enhanced HES Electrolytes
	156	Gülşah ÇELİK GÜL, Fadime ÇOBAN	A Cost-Effective Microwave Route to Borohydroxyapatite: Crystallinity, Elemental Composition, and Vickers Hardness Evaluation
	103	Hayat Arbouz	Advancing High-Performance Solar Cells with Ca ₃ NCI ₃ Perovskite A ₃ BX ₃ -Type Absorbers for Next-Generation Photovoltaics
	104	Şemsettin KILINÇARSLAN, Yasemin ŞİMŞEK TÜRKER, Betül ÖZTÜRK	Determination of Properties of Heavy Concretes with Sorel Cement
	105	Burim KAMISHI	Phase Pattern from Three Cylindrical Waves Using the Moiré Method
	109	Faiza MOUHOUCHE, Kahina DJAFRI, Dehmas mokrane	A Compact high isolation of MIMO UWB Antenna with Band Notched Characteristics for WLAN Application
	112	Nabi IBADOV, Gökhan ARSLAN	The potential of information technology in construction project management
	118	Izet Ibrahim, Faruk Hajrizi	THE STEAM GASIFICATION OF LIGNITE WITH MOLTEN ELECTRO-REDUCTION FURNACE SLAG AS HEAT CARRIER AND CATALYST
	119	Skender KABASHI and Ilir ISUFI	Modeling Cyclonic Development on the Lee Side of West-Southwest Kosovo
12.30-14.00	LUNCH---BREAK		
	124	A. MOKHTARI, Y.A.MASMOUDI, A.BRICK CHAOUICHE, R.BADI	Optimum design of vehicle frontal structure for crashworthiness

14.00-16.00	126	Şakir Bingöl, Mustafa Erdem Tusun, Berkant Şimşek, Ahmet Selman Karışan, Fahri Ramazan Geçgel, Mustafa Yılmaz	Smart Earthquake Emergency Bag: Structural Damage Classification Using Multi-Sensor Data and Machine Learning
	132	Yılka KABASHI, Rozana BUCI	Comparison of Intensity Modulated Radiotherapy and Proton Therapy Treatment of Head and Neck Cancer
	133	Rozana BUCI, Yılka KABASHI	Treatment Plan Comparison of Proton Versus Photon Therapy in Meningioma Irradiation
	136	Nabi IBADOV, Paweł NOWAK, Fabio PLANU, Fabiana RACO, Jerzy ROSŁON	Integrating Digital Twins in Architecture, Engineering and Construction
	146	Adnan CALIK, Nazim UCAR and A. Faruk ÖZDEMİR	Welding of Exotic Materials
	147	Shengting Zhang, Rodrigo C.V. Coelho, Jing Li, Qingyuan Zhu, Keliu Wu, Zhangxin Chen	Geometry-Driven Optimization of Oil–Water Imbibition in Capillaries
	149	Senlin Luo, Guangqing Zhang, Bin Sun, Jia Qiao, Hao Li, Zhuang Li	The transformation of the microscopic fracture mechanism of rock induced by confining pressure and its macroscopic fracture response
16.00-16.15	BREAK		
16.15-18.00	157	Souhila MEHERHERA, S.ALI KHOUDJA, S.ZEKARA, S.ABDI.	HYPERHOMOCYSTEINEMIA AND ALZHEIMER'S DISEASE
	158	Souhila MEHERHERA, K.BAADJ,N.BAKEZZI, S. ABDI	HOMA AND TYG INDICES IN PATIENTS WITH METABOLIC SYNDROME: COMPARATIVE STUDY
	159	Pengbo YIN, Zongjie MU, Panpan ZHANG, Changhui ZENG, Qilong WEI	Research on the Migration Law of Proppant in Complex Fractures of Deep Coal under Hydraulic Fracturing
	160	Qilong WEI, Zongjie MU, Panpan ZHANG, Changhui ZENG, Pengbo YIN	A Noise Reduction Evaluation Method for coal petrology CT Images Based on Multi-index Fusion and Dynamic Weight Allocation
	161	Elif Akgün Aslan, Mehmet Sezgin	Özel Öklid Lie Grubu SE(2)
	162	Jasmina MARKOVIĆ-LIPKOVSKI, Nataša STANIĆ, Maja ŽIVOTIĆ, Marijana ZIMONJIC	The Benefits of Automation in Immunohistochemistry: Efficiency Standardization, and Cost Savings
	165	Benalia KOUINI, Asma Nour El Houda SID, Amina BENBOUABDALLAH	Development of an additive of aged water-based drilling fluid (Na-Bentonite /eco-local polymer) with grass powder
	173	Jiusen Wei, Wei Liu	ROP Improvement in Hard Formation Drilling Using Large Size PDC Cutters
	177	Naoual SEDDAOUI, Sabri BOULOUMA, Toufik SMAIL,Lazhar RAHMANI	Hybrid Metaheuristic Energy management strategy in microgrids with different load profiles
	180	Sofiane ABERKANE, Hamza SEMMARI, Juan Carlos BRUNO, Alberto CORONAS	Investigation of an integrated organic rankine cycle combined with water/ lithium bromide absorption chiller for a petroleum process application
	181	Cezary KRASKIEWICZ, Artur ZBICIAK, Przemysław MOSSAKOWSKI, Kacper WASILEWSKI	Assessment of the Tram Track Structure Condition Using Impulse Vibroacoustic Testing
	186	Mouhoub BIRANE , Abdelkader FIRAH,SEBA SAMAH, Slimane SAYAH , Khalil BENMOUÏZA,Aicha DEGLA, Sabiha anas BOUSSAA	Artificial Intelligent for Distributed Battery Storage Optimization in Smart Grids in Renewable Energy Systems

	194	Ulviye BUNYATOVA; Cengiz KOCUM; Sedat NAZLIBILEK; Kubra ERKAN TURKMEN	Sustainable Sensor for Monitoring and Deactivating Waterborne Pathogens in Contaminated Water Sources using functionalised metal nanoparticles
	195	Naim SYLA and Fisnik ALIAJ	Increase of surface hardness by steel 16MnCrV9 after gas nitriding

19 October 2025-Sunday

ROOM-1

10.00-11.00	Session Chair : Dr. Feride KULALI-- Uskudar University, Istanbul / TURKEY		
	<p>Invited Speaker 4: Prof.Dr. Amir HUSSEIN–Edinburgh Napier University, UK “AI-enabled studies in Sustainable Technologies”</p> <p>Invited Speaker 5: Prof.Dr. Gerhard-Wilhelm WEBER–Poznan University of Technology-POLAND “Boosting HRM Effectiveness for Generation Z: The Role of Ergonomics and Collaborative Workspaces ”</p>		
11.00-11.30	BREAK		

	ROOM-1		
11.30-12.30	Session Chair : Dr. Feride KULALI-- Uskudar University, Istanbul / TURKEY		
	214	Morad HAMAD	Synergistic Evaluation of Ionizing Radiation Shielding in Novel Lead-Free Alloys Using Geant4 MC toolkit
	215	Amer A. G. Al Abdel Hamid	Retarding Effect of the Mediating Sulfane (-S-) Group on Chelation Efficacy of Thiolic-Sulfur Toward Mercury in 2-(2-Mercaptothiazol-5-yl) acetic acid Derivative. DFT-Theoretical Study.
	216	Fatah Cheurfa	Sensitivity analysis of the black-scholes model under hybrid uncertainty: An approach using p-boxes and Bhattacharyya distance
	185	Artan F.ALIDEMA, Frederik DARA	Solving Volterra Fuzzy Integral Equations Using the Fuzzy Sumudu Transform
12.30-14.00	LUNCH---BREAK		

14.00-16.00	228	Guella SOUFIANE, Said MOHAMMED EL AMİN, Benkouider ALİ MUSTAPHA, Guet MOHAMED EL AMİNE, Baitiche CHAHİNEZ, Boucheikh MADANİ ADDA	Economic Evaluation of Flared Gas Recovery Technologies at the GL2/Z Plant-Arzew, Algeria
	231	Osman GÜNAY , Fahrettin Fatih KESMEZACAR, Yağmur İdil ULUSOY , Duygu TUNÇMAN KAYAOKAY, Özge DEMİR, Songül KARAÇAM, Eren ÖZGÜR, Nami YEYİN, Rabia Lebriz USLU BEŞLİ, Mustafa DEMİR	Manufacturing and Printing of Urogenital System Organs
	232	Osman GÜNAY, Görkem SERBES, İsmail CANTÜRK, Caner YALÇIN, Mutlu İÇHEDEF, Caner TAŞKÖPRÜ, Murat SAÇ	Radon Concentration Variations in the Adalar District, Istanbul
	235	Halil SOYAL	Strengthening Radiation Safety Education in the Pre-Internship Health Associate Degree Curriculum
	236	Halil SOYAL, Mucize SARIHAN	Internal Radiation Alarm: Safety Awareness in Future Healthcare Workers
	296	Fatma Gamze Tan Kantar, Zafer Yazıcıgil	Doğal Su Kaynaklarındaki Toplam Organik Karbon Değişimlerinin Mevsimsel Analizi
	297	Aşkın TOKA, Zafer YAZICIGİL	Mikrodalga destekli s- Triazin Bileşiklerin Sentezi ve Elektrot Yüzeyine Modifiye Edilmesi
16.00-16.15	BREAK		
16.15-18.00	286	Aycan Şengul, Iskender Akkurt	Determination of Radiation Properties of New Generation Biopolymers by Monte Carlo
	249	Berra Seda Sarihan Kara	Interior Spatial Design Of Radioactive Waiting Areas İn Nuclear Medicine Units: Integrating Safety, Ergonomics, And Psychosocial Factors
	250	Aykut KARADEMİR, Mucize SARIHAN	Evaluation of caregiving burden and psychological distress among caregivers of patients undergoing radiotherapy
	246	Mucize Sarihan	Assessment of cancer patients' concerns during radiotherapy: a radiation oncology perspective
	247	Mucize Sarihan, Halil Soyal	Radiation safety and managerial ethical principles in healthcare services
	248	Berra Seda Sarihan Kara, Mehmet Naim Kara	The Impact Of Radiation Area Design On Healthcare Services
	291	Betul CETİN, Arzu POYRAZ	Radiological dose assessment of Pigment-Added Paints
	295	Işıl BİLGİÇ, Berra Seda SARIHAN KARA	Spatial design and security approach to reduce gamma energy contamination in myocardial scintigraphy

	ROOM-2		
11.30-12.30	Session Chair : Dr. Berra Seda SARIHAN – Okan University-Istanbul-Turkey		
	251	Aykut KARADEMİR, Mucize SARIHAN	Evaluation of anxiety levels in cancer patients undergoing Ionizing radiation therapy due to side effects
	255	Besnik SARAMATI, Burim UKA, Fesal SELIMI, Behar RACI, Labinot KASTRATI	Microcontroller-Guided DIBH Phantom: A Low-Cost Training Tool for Patient Positioning in Radiotherapy
	283	Leila Abdollahzadeh Ramhormozi ,Mohammadreza Shahbazi Chulou	Risk Management in Islamic Financial Systems: Alignment with International Standards
	284	Leila Abdollahzadeh Ramhormozi	Comparative Analysis of the Economics of Crime in Iran and Turkey: Institutional Structures, Economic Drivers, and Criminal Justice Policies
	285	Leila Abdollahzadeh Ramhormozi, Seyed Mojtaba Alavi	Media Economics in the Digital Age: Comparative Analysis of Ownership Structures, Information Concentration, and Economic Inequality in G20 and OIC Countries
	259	Behar RACI, Besnik SARAMATI, Burim UKA, Snezana STOJOVSKA, Igor STOJOVSKI, Arta KAMERI JUSUF, Ilir AHMETXHEKAI, Meleq BAHTIJARI, Gezim HODOLLI, Violeta KLISAROVSKA, Labinot KASTRATI, Hekuran SEJDIU	Glioblastoma Multiforme: Case Report, Treatment, and Prognosis
	261	Burim UKA, Polikron DHOQINA, Gëzim HODOLLI, Sehad KADIRI Labinot KASTRATI	The Potential and Difficulties of Using 3D Printing to Create Vaginal Applicators for Brachytherapy
12.30-14.00	LUNCH---BREAK		
14.00-16.00			
	264	Osman GÜNAY, Ümmühan ZENGİN ÖZER, Muhammet Mert ÇELİK	PET/CT versus Conventional Imaging in Cancer Diagnosis: Evidence from a Comprehensive Meta-Analysis
	265	Kamran KAMAL	Digital health systems: conceptual framework, opportunities, and challenges
	268	S. Anas Boussaa, K. Benfadel, L. Talbi, Y. Ouadah, A. Boukezzata, A. Trade khodja, D. Allam, S. Hocine, A. Manseri, N. Zaourar Boutarek, B. Hamdoud and S. Kaci	Bismuth oxide electrode for CO2 conversion application
	269	Sabiha ANAS BOUSSAA, Abdallah TRAD KHODJA, Messaouda AYACHI, Abderrahmane NAAS, Samy ANAS, Fatima BOUDEFFAR, Rabia RAHMOUNE, Bilal MERAZKA	Processing of recovery Si down to purified Si powder from SIREVIVAL PROJECT
	163	Sabiha ANAS BOUSSAA, Abdallah TRAD KHODJA, Messaouda AYACHI, Abderrahmane NAAS, Samy ANAS, Fatima BOUDEFFAR, Rabia RAHMOUNE, Bilal MERAZK	Processing of recovery Si down to purified Si powder from SIREVIVAL PROJECT

	75	Mazhar Al Zoubi	Androgen Receptor (AR) Mutations and Prostate Cancer Risk in the Jordanian Population.
	274	Samy ANAS, Naima ZAOURAR BOUTAREK, Samir MANSOUR ,Faouzi MESSAOUD, Sofiane LATRECHE , P DAVID and E. MOSSANG	Nickel Zinc thin film for Hydrogen production
	292	Arzu POYRAZ, Betül ÇETİN	Theoretical Determination of Gamma Shielding Performance of Lead Alternative TaB ₂ –Bi ₂ O ₃ –ZrO ₂ –Gd ₂ O ₃ Composite
	293	Arzu POYRAZ, Betül ÇETİN	Investigation of Gamma Ray Attenuation Properties of ZnO/PMMA Composites Using GATE Simulation and XCOM Database
16.00-16.15	BREAK		
16.15-18.00			

	ONLINE (19 October 2025-Sunday)		
	Session Chair : Dr. Osman GUNAY —Yıldız Technical University, İstanbul / TURKEY		
10.30-11.15	Invited Speaker 5: Prof.Dr. Gerhard-Wilhelm WEBER—Poznan University of Technology-POLAND “Regime-switching models via stochastic optimal control & robust control theory, with applications in finance and insurance”		
11.30-14.30	222	Sabrina. Benmebarek , Nadia Djouambi, Salima. Bacha, Imed Eddine Benmebarek, Bouzid Omar Boussaha, Aicha Beya Mammeria	Biogenic Synthesis and Characterization of Zinc Oxide and Titanium Dioxide Nanoparticles Mediated by Plant Extracts
	233	Cemre Serdem BİLİR, Osman GÜNAY, Fahrettin Fatih KESMEZACAR, Özge COŞKUN SAĞLAM, Berrin YALÇIN, Murat DOĞAN	Organ-Specific Dosimetry in Ovarian Vein Embolization
	270	Fouad KERKAR, Djamel OUADJAOUT, Nabil KHELİFATİ	Electrical Resistivity and Minority Carrier Lifetime Distribution in Directional Solidification of Silicon Ingot

	279	Rıza Fatih MENDİLCİOĞLU	Opportunities and limitations of artificial intelligence-based visualisation tools in architectural representation
	207	Sabrina. Benmebarek, Nadia Djouambi, Salima. Bacha, Imed Eddine Benmebarek, Bouzid Omar Boussaha, Aicha Beya Mammeria	Chemical study and valorization of the essential oil of Teucrium polium L. as a bioactive material for the development of a natural pharmaceutical formulation with anti-inflammatory purposes
	223	Demet SARIYER, Elif YILDIRIM	Learning from Neutrons: Machine Learning and Monte Carlo Synergy in Shielding Design
	12	F.Brik, K.Boukari, Z.Khaldouna and M.Taibi	Development and optimization of a smart wearable sensor for monitoring cardiac and respiratory signals
	225	BOBOCIOIU Ema, KERKAR Fouad, ANAS BOUSSAA Sabiha, NAAS Abderrahmane, HAZMOUNE Abdessalam	Mechanical and microstructural study of silica intended for photovoltaic silicon production
	294	Mohammadreza Shahbazicholoo	Risk Management in Islamic Financial Systems: Alignment with International Standards
	226	BOBOCIOIU Ema, KERKAR Fouad, ANAS BOUSSAA Sabiha, NAAS Abderrahmane, HAZMOUNE Abdessalam	Valorisation of Algerian quartz vein deposits as source of energy
	298	Dilan BUZ ÇELİK, Nalan ÇİÇEK BEZİR	Synthesis of graphene using the hummers method

POSTERS

18 October 2025-Saturday

Session Chair : Dr. Mucize SARIHAN – İstanbul Okan University, İstanbul –TURKIYE			
	23	BOUSSAID Linda, AMIRECHE Fouzia, BENSIRADJ Nour El Houda, ZOUAGHI Nafila, BESSILA Souad	Application of flory patterson theory on the volumetric properties of liquid mixtures 1,2- dichloroethane with diethylether and dispropylether
	30	Moussa ABBAS and Mohamed TRARI	Removal of Toxic Ni(II) by Activated Olive Stone: Optization of Analytical Parameters by Response Surface Methodology
	32	AKSIL Tounsia, ABBAS Moussa, TRARI Mohamed	Caracterization studies on adsorption of Iodine using carbon derived from the crown of Oak
	34	Rachid DJEBIEN, Yasmina KELLOUCHE	Prediction of compressive strength of concrete modified with marble waste powder using artificial intelligence model
	35	Naim SYLA, Fisnik ALIAJ and Eros Halili	Modeling the thermal conductivity of some metals

10.00-12.30			
	45	Hafida MERZOUK, Karima SAIDANI, Adouda MOUNCI, Souhila SALHI	Antioxidant and anti-mastitis activity of some essential oils
	46	Hafida MERZOUK	The effect of extracts of 12 local medicinal plants against uropathogenic Escherichia coli
	54	Lazhar BAROURA, Abdelyamine BOUKHOBZA, Kamel FEDAOUI, Lahcen MEBARKI, Amira ABOUSSALIH	Analysis and Numerical Simulation of a 316L Stainless Steel Femoral Plate
	55	Brahim DENNAI, Ahmed LAIDI, Boumediene TOUATI	Stepped Double-Slope Solar Still: Comparative Study between Analytical Simulation and Experimental Validation
	61	Hacene AMEDDAH	Study of Nano-Biomaterials for Bone Regeneration by TPMS Lattice Structure
	69	Asma ABDENBI, Habiba Berbaoui, Amel Saad, Abdelhadi SEGHIR, and Boumediene TOUATI	Modeling and Experimental Analysis of Drying Parameters Affecting Pistacia Atlantica Leaf Preservation
	77	Sabrina SAIT-DIB, Rima Tafoukt-Mezzai, Alima GHAROUT-SAIT, Meriem Adouane, Lila BOULEKBACHE-MAKHLOUF	Formulation of a Cosmetic Cream with Anti-Inflammatory Effect Based on Medicinal Plants
	78	Derabla RIAD, Nedjar RADOUANE, Yahiaoui ADEL and Mosbah MOHAMED	Physical-Mechanical Characterization of a Lightweight Concrete based on Wood Chips
	80	Krimo AZOUAOUI, Youcef HADJ MIHOUB SIDI MOUSSA, Said MOUHOUBI	Damage Investigation and Finite Element Modeling of Sandwich Panels Subjected to Multiple Low-Energy Impacts
	81	Abdelhamid MILOUDI, Mohamed TAHI	Integrating Genetic Algorithms and Decision Trees for Efficient Fault Diagnosis in Rotating Machinery
	82	Nourdine OUALI, Youcef BRAHIMI	REPAIR OF DEFECTS IN WELDING JOINTS AND CASTING PARTS USING WELDING TECHNOLOGY
	83	Ahmed BOUSSAHA, Rafik MAKHLOUFI	Finding the Best Crimping Conditions for Metal Cans through Experimental Testing
	87	Moussaoui Saida, Smaili Fatiha, Berrabah Salah Eddine, Kaizra Salima, Bouchemal Hassiba	Impact of Scan Rates on the Redox Behavior of Paracetamol at NiO/GrE
	107	Anna JAKUBCZYK-GALCZYŃSKA, Agata SIEMASZKO	Artificial Intelligence in Monitoring and Diagnostics in Civil Engineering
	139	Marta MIKIELEWICZ, Anna JAKUBCZYK-GALCZYŃSKA, Robert JANKOWSKI	Impact of Traffic-Induced Vibrations on People in Buildings: A Neural Network Study
	113	Fayrouz BENHAOUA, Djalila AOUI, Nacira STITI, Younes Lamri, Ayoub Kechid, Imen OULDAMRI, Mehdi TOUBANE, Bachir edin Messaid, Razika TALA IGHIL	Study of the Effectiveness of Steel Shavings as a Foaming Agent for the Production of Foams Glass
	122	A. MOKHTARI, Y.A.MASMOUDI, A.BRICK CHAOUCHE, R.BADI	Optimum design of vehicle frontal structure for crashworthiness
	123	Toufik SMAIL, Sabri BOULOUMA, Naoual SEDDAOUI	Solving Voltage Total Harmonic Distortion Minimization Problem in Cascaded H-Bridge Multi-level Inverters by using the PSO Algorithm

	129	Astrit SHALA, Nazmi HASI	Definition of the seismic waves Vp and Vs for the seismic zones of Mitrovica-Kosova
	131	Junfeng Zhu, Guangqing Zhang	Improved Shale Microcrack Prediction via Plasticity-Modified Model
	134	GUERFI. Bahdja ; BOUKHADRA. R ; KHADER.N; ZOUANIA ; HADHOUM. N, HADJADJ AOUL.F.Z	DEVELOPMENT AND CHARACTERIZATION OF A PVA-ZnO AND PVA- CHITOSAN-ZnO NANOCOMPOSITE DRESSING WITH ANTIBACTERIAL ACTIVITY.
	135	Dr.GUERFI. Bahdja, KHADER.N, Bellahcene. I, ZOUANIA. A, HADHOUM N, BENZIANE. L, GUERCH. A, HAMLAOUL.S.HADJADJ AOUL.F. Z	THERAPEUTIC EDUCATION OF PATIENTS IN PHARMACIES:CURRENT STATES.
	137	Ruiheng JIN, Guangqing ZHANG	Study on the discontinuous fracture process zone leading to multiple parallel fractures
	138	Yaoyang Li, Guangqing Zhang, Yansen Ling Dingshan Cai	Experimental Study on Fracture Morphology Evolution in Horizontal Well Refracturing Based on FBG Optical Fiber Monitoring
	145	Belhaneche-Bensemra NAIMA, Touatou SOUMIA	Preparation And Characterization Of Wool Keratin Thermo-Pressed Plasticized Films Using Factorial Design
	148	Panpan ZHANG, Zongjie MU, Pengbo YIN, Qilong WEI, Shouceng Tian	A 3D method for evaluating the sphericity of proppant in the field of hydraulic fracturing
12.30-14.00	BREAK		
14.00-18.00	153	Chouder DalilaBelguerbiOuafia Seid Lamria	Elaboration and study of hybrid material of polyvinyl alcohol / polypyrrole Cu-Ni
	154	Chouder Dalila Belguerbi Ouafia Seid Lamria	Electrochemical synthesis of polyaniline and his dipping by ions Ni2+
	164	Fengjiao Li, Wei Liu	Hierarchical Foam Metal Integration in PDC Cutters: A Strategy for Extreme-Condition Performance Optimization
	166	Dr KHADER.N,GUERFI. Bahdja	Assessment of the oxidative stress on the human health in Algeria
	169	Samia ABDI, Salam BENNOUAR, Mohamed MAKRELOUF,Akila ZEATI,Christine PETIT, Chrystel BONNET	REDEFINING THE THRESHOLD VALUE OF HYPERSENSITIVE CARDIAC TROPONIN I IN SHORT-TERM COVID-19 MORTALITY PREDICTION
	172	Samia.BEROUAKEN,DAHMAS , Samia.ABDI	MOLAR BANDS MICROBIOLOGICAL CONTROL OF THE EFFECTIVENESS OF THE DISINFECTION PROCESS
	179	Mengjie LI,Bei LV,Kaixin LIU,Yufei ZHANG, Junwang FU, Shiyuan LI	Experimental Investigation of Shear Friction Characteristics in Volcanic Rock Under In-Situ Shear-Enhanced Permeability Conditions
	182	Chouder Dalila Gouichiche Amina Belguerbi Ouafia Seid Lamria	Synthesis of chemical polyaniline and his dopage by metallic oxide
	183	Bennia imene, Benkedda Younes	Numerical and Experimental Analysis of Resistance Spot Welding of Aluminum Alloys Using Finite Volume Method
	184	Bennia imene, Samah Iounis	Development of a Computational Interface for the Thermal Behavior Analysis of Metallic Plates Using the Finite Volume Method
	189	Omar Choukri*, Ezzine Mohsine, Souadi Taibi	INDUSTRIAL RECYCLING OF USED COPPER CABLES AND WIRES: COMBINATION OF COLD AND HOT TREATMENT FOR MAXIMUM RECOVERY AND MINIMUM EMISSIONS
	190	Boutora SALIHA, Hamitouche ISMAIL, Dridi ISLAM	Enhanced Energy Optimization through IoT Smart Metering and AI-Driven Forecasting and Scheduling
	191	Nour el islam BACHARI, ZEDDAM Chouaib, HAMDY Younes Lamine SALIM	New application for detecting desert soil change based on long-term satellite images

192	Nour el islam BACHARI, Lamri NACEF, Fouzia HOUMA	Hybrid statistical and artificial intelligence approach for forecasting wind speeds energy on the west coast of Algeria
193	Youcef BOUTORA, Safia AIMEUR, Noureddine TAKORABET	Design of permanent magnets for sinusoidal waveform of airgap induction in slotless synchronous machines
197	Mounir SOUICI, Dalil BOUMALA, Ahmed TEDJANI	Monte Carlo simulation of dry DNA exposed to protons at the Bragg-peak energies
206	Dalil BOUMALA, Mounir SOUICI, Ahmed TEDJANI	Quantitative Assessment of Therapeutic and Neutron-Induced Doses Using MCNP in Cranial Proton Irradiation
208	Toufik MOUET, Abdelmalek MOUATSI, Lyes DIB, Abdelali SAOULI, Bessem KAGHOUCHE, Ilyes NOUICER	Simulation and optimization for Device of a lead-free inorganic perovskite solar cell using SCAPS-1D
219	F. ZAMI, F. SOFRANI, A. CHERIET, S. ZEFFANE, N. KAOUICHE	Structural, elastic, electronic and magnetic properties of a Half-Heusler alloy: ab- initio study
221	Kaouche NAIMA, Boutaous AHMED, Zamii FATIMA	Comparison of the effect of plant and synthetic fibers on fiber–matrix interface damage in biocomposite materials based on biodegradable PHA (polyhydroxyalkanoate) matrices with that in PLA (polylactic acid) matrix.
234	Dr. Lua"Y Zeatoun, Eng. Omar Al-Rabay'ah	Evaluating Ambient Air Pollution and Forecasting Its Urban Impact Using ARIMA and LSTM Models: A Case Study from Central Amman
240	Nour el yakine YAHA, Akila BOUSTA, Sabah BRAHMI, Mohammed Salah BOUKHECHEM	Contribution to the study of the chemical composition and antioxidant activity of propolis from two regions in northern Algeria
241	Youcef BOUTORA, Safia AIMEUR, Noureddine TAKORABET, Saliha BOUTORA	Design of permanent magnets for sinusoidal waveform of airgap induction in slotless synchronous machines
252	Harche RIMA, Laoufi NADIA AICHA	Study of the effectiveness of the diisohexanizer and its impact on isomer quality at the Algiers refinery
254	Dr. Jana LIPKOVSKI, Prof. Dr. Aleksandar LIPKOVSKI	Numerical methods used in fire-protection simulations – a review
262	Polikron DHOQINA Burim UKA, Gëzim HODOLLI, Behar RACI	Methodological Aspects in the Commissioning of 3D Printed Vaginal Applicators for Gynecological HDR Brachytherapy
282	Nourdine OUALI, Fatma Zohra SI SALAH, Mahrez SAADEDINE, Nacira NAAR	VALORIZATION OF FARMING WASTE IN A COMPOSITE MATERIAL: MECHANICAL CHARACTERIZATION
277	Hamdi ALIU, Zeynep Dengiz BALTA, Rreze GECAJ, Salih KUMRU, Fikir BALTA, Arben SINANI	Microbiological safety of artisanal honey: Detection of C. botulinum and other bacteria in Kosovo
278	Esad Behrami, Ditjona Shala, Blerina Kollani	Determination of Physico-Chemical Properties and Heavy Metals Lead (Pb), Cadmium (Cd), Aluminum (Al), Nickel (Ni), and Chromium (Cr) in Cabbage Cultivated in the Region of Prishtina and Prizren.
271	Gezim HODOLLI, Sehad KADIRI, Burim UKA, Labinot KASTRATI	Validation of the individual monitoring system for radiation workers through intercomparison tests
57	Karim ARAR, Hacene AMEDDAH	Fatigue Analysis of 3D Printing Plastic Helical Gears
211	Ahmed BELGACEM, Renad RABIE, Hocine HADOUN, Lotfi FAGHI	Effect of the mass ratio of phosphoric acid on the chemical impregnation of a vegetal waste for the preparation of a porous material
212	Ahmed BELGACEM, Renad RABIE, Hocine HADOUN, Lotfi FAGHI, Insaf OULDBRAHIM	Green Synthesis of Mesoporous Activated Carbon from Plant Waste for Azo Dye Removal in Water Treatment

	263	Fisnik ALIAJ, Suela HOXHA, Teuta PUSTINA-KRASNIQI, Mirlind QERIMI	Optical Performance and Clinical Relevance of CAD/CAM Ceramic Materials
	79	Sabiha TALMAT, Olivier BRUGIER, Jean-Paul LIÉGEOIS, Aziouz OUBADI	The two-stage (630 and 600 Ma) emplacement of the Amsel post-collisional Pan-African high-K calc-alkaline batholith, Hoggar, Algeria
	7	Nazmi HASI, Latif HASI	Macroseismic evaluation of the location in Rahovec for the installation of solar panels
	256	Besnik SARAMATI	Microcontrollers And Interactive Phantoms In Ionizing Radiation Physics And Brachytherapy Education. A Literature Review!
	125	Abdesselam MEKROUD, Adel BOUCHAHED, Abdellah DRAIDI, Mohamed ASSABAA, Salah HAMMOUDI, Abdelfettah BOUSSAID	Enhancement of the DC Output Voltage of a Multilevel Boost Converter Using LQR Control.
	187	Sid ali BOUBENDIR , Maamer MALKI, Salah LARBI , Kamel DJENDER	Effect of Lubricant Additives on Hybrid Lubrication Performance

PRESENTATIONS IN ICCESEN-2025

Abs. #	Authors	Title	Page
279	Rıza Fatih MENDİLCİOĞLU	Opportunities and limitations of artificial intelligence-based visualisation tools in architectural representation	32
6	Zarife BAJRAKTARI GASHI, Izet IBRAHIMI	Optimizing roasting processes in rotary kilns for iron-nickel ores	33
7	Nazmi HASI, Latif HASI	Macroseismic evaluation of the location in Rahovec for the installation of solar panels	34
13	Bedjou Fatiha, Meddas Meriem and Chekkal Tadjajikt	Antioxidant activity of essential oils and ethanolic extracts of four medicinal plants alone and in combination	35
14	Yachba KHEDIDJA, Bouamrane KARIM	Towards a Bio-Inspired Approach for the Optimization of Product Distribution in a Transport Company	36
15	Rilinda RAÇI, Latif HASI	Integrating Computational Modeling with Experimental Methods in Bending Behavior Analysis of Round Rods	37
23	BOUSSAID Linda, AMIRECHE Fouzia, BENSIRADJ Nour El Houda, ZOUAGHI Nafila, BESSILA Souad	Application of flory patterson theory on the volumetric properties of liquid mixtures 1,2- dichloroethane with diethylether and dispropylether	38
26	Kajtaç Bllaca	Explicit formula and Prime Number Theorem for zeta Function on Function Field and Its Applications	39
27	Chelli ZOUBIR, Tarek KHOUALDIA	Deep Neural Networks For Transmission Line Fault Diagnosis	40
31	Naima Boudieb, Mohamed LOUCIF SEIAD , Imad RATI and Imane BENAMMANE	Electrochemical characterization of a composite (PANI/PEDOT:PSS) for application in supercapacitors	41
34	Rachid DJEBIEN, Yasmina KELLOUCHE	Prediction of compressive strength of concrete modified with marble waste powder using artificial intelligence model	42
35	Naim SYLA, Fisnik ALIAJ and Eros Halili	Modeling the thermal conductivity of some metals	43
50	Khoualdia Tarek, Chelli Zoubi, Guerti Nasreddin, Lakikza Abdelmalek	Application of Artificial Intelligence for Fault Diagnosis in Bevel Gears Using Vibration Analysis	44
54	Lazhar BAROURA, Abdelyamine BOUKHOBZA, Kamel FEDAOUI, Lahcen MEBARKI, Amira ABOUSSALIH	Analysis and Numerical Simulation of a 316L Stainless Steel Femoral Plate	45
55	Brahim DENNAI, Ahmed LAIDI, Boumediene TOUATI	Stepped Double-Slope Solar Still: Comparative Study between Analytical Simulation and Experimental Validation	46
58	Samia Hamma-Faradji, Lylia Ouarabi, Amel Ait Meddour, Ghania Zidi, Liza Ouarabi ,wissam Hafir, Sylia Terki ,Samia Benfattoum, Rachid adjebli	Study of the probiotic potential and anti-Staphylococcus aureus power of Lactobacillus strains	47
59	Hamza BENNACEUR, Hacene AMEDDAH	Finite Element Analysis of Elasto-plastic Material Model for Cardiovascular Stent	48

61	Hacene AMEDDAH	Study of Nano-Biomaterials for Bone Regeneration by TPMS Lattice Structure	49
64	Qiang Zhao, Ting-Na Shao, Rui Liu, Zhi-Ping Yin, Shi-Jie Yang, Jia-Cai Nie	Research on the novel quantum phenomena in infinite-layer nickelate unconventional superconducting films	50
68	GHAROUT-SAIT Alima, SAIT-DI Sabrina, MENDIL Ouidad, MEHIDI Imene, MANSEUR Lyticia, BELLIL Dassine, DJOUDI Ferhat	CTX-M-15 ESBL-Producing E. coli Isolated from Pigeons in Bejaia, Algeria	51
69	Asma ABDENBI, Habiba Berbaoui, Amel Saad, Abdelhadi SEGHIR, and Boumediene TOUATI	Modeling and Experimental Analysis of Drying Parameters Affecting Pistacia Atlantica Leaf Preservation	52
75	Mazhar Al Zoubi	Androgen Receptor (AR) Mutations and Prostate Cancer Risk in the Jordanian Population.	53
77	Sabrina SAIT-DIB, Rima Tafoukt-Mezzai, Alima GHAROUT-SAIT, Meriem Adouane, Lila BOULEKBACHE-MAKHLOUF	Formulation of a Cosmetic Cream with Anti-Inflammatory Effect Based on Medicinal Plants	54
79	Sabiha TALMAT, Olivier BRUGIER, Jean-Paul LIÉGEOIS, Aziouz OUBADI	The two-stage (630 and 600 Ma) emplacement of the Amsel post-collisional Pan-African high-K calc-alkaline batholith, Hoggar, Algeria	55
80	Krimo AZOUAOUI, Youcef HADJ MIHOUB SIDI MOUSSA, Said MOUHOUBI	Damage Investigation and Finite Element Modeling of Sandwich Panels Subjected to Multiple Low-Energy Impacts	56
81	Abdelhamid MILOUDI, Mohamed TAHI	Integrating Genetic Algorithms and Decision Trees for Efficient Fault Diagnosis in Rotating Machinery	57
83	Ahmed BOUSSAHA, Rafik MAKHLOUFI	Finding the Best Crimping Conditions for Metal Cans through Experimental Testing	58
84	Thagirarani MUNIANDY, Che Zalina ZULKIFLI, Fazilat KODIROVA, Nor Asiah RAZAK, Okta NURIKA, Jakhongir SHOMUTALOV, Mad Helmi AB. MAJID, Zunnunova Umilda GULOMOVNA	An Embedded Framework for Smart Cloud Architecture Enabling Adaptive Business-Driven Solutions	59
87	Moussaoui Saida, Smaili Fatiha, Berrabah Salah Eddine, Kaizra Salima , Bouchemal Hassiba	Impact of Scan Rates on the Redox Behavior of Paracetamol at NiO/GrE	60
102	Riyadh Muhaidat, Mazhar Al Zoubi, Muath Al-Qudah, Mohammad Oqlat, Athena McKown, Rana Al-Kfoof, Khaldoun J. Al-Hadid	Assessment of the biochemical attributes of C4 photosynthesis in Boerhavia (Nyctaginaceae), a proposed model of C4 subtypes metabolic cooperation	61
103	Hayat Arbouz	Advancing High-Performance Solar Cells with Ca ₃ NCI ₃ Perovskite A ₃ BX ₃ -Type Absorbers for Next-Generation Photovoltaics	62
105	Burim KAMISHI	Phase Pattern from Three Cylindrical Waves Using the Moiré Method	63

92	Mokhtar BENARIOUA, Nora Bouzeghaia, Imane ABDOU, Mahieddine NAOUN	Green corrosion inhibitors in the oil sector - Reality and Prospects	64
109	Faiza MOUHOUCHE, Kahina DJAFRI, Dehmas mokrane	A Compact high isolation of MIMO UWB Antenna with Band Notched Characteristics for WLAN Application	65
112	Nabi IBADOV, Gökhan ARSLAN	The potential of information technology in construction project management	66
119	Skender KABASHI and Ilir ISUFI	Modeling Cyclonic Development on the Lee Side of West-Southwest Kosovo	67
107	Anna JAKUBCZYK-GAŁCZYŃSKA, Agata SIEMASZKO	Artificial Intelligence in Monitoring and Diagnostics in Civil Engineering	68
131	Junfeng Zhu, Guangqing Zhang	Improved Shale Microcrack Prediction via Plasticity-Modified Model	69
132	Yilka KABASHI, Rozana BUCI	Comparison of Intensity Modulated Radiotherapy and Proton Therapy Treatment of Head and Neck Cancer	70
134	GUERFI. Bahdja ; BOUKHADRA. R ; KHADER.N; ZOUANI.A ; HADHOUM. N, HADJADJ AOUL.F.Z	DEVELOPMENT AND CHARACTERIZATION OF A PVA-ZnO AND PVA- CHITOSAN-ZnO NANOCOMPOSITE DRESSING WITH ANTIBACTERIAL ACTIVITY.	71
136	Nabi IBADOV, Paweł NOWAK, Fabio PLANU, Fabiana RACO, Jerzy ROŚŁON	Integrating Digital Twins in Architecture, Engineering and Construction	73
137	Ruiheng JIN, Guangqing ZHANG	Study on the discontinuous fracture process zone leading to multiple parallel fractures	74
138	Yaoyang Li, Guangqing Zhang, Yansen Ling Dingshan Cai	Experimental Study on Fracture Morphology Evolution in Horizontal Well Refracturing Based on FBG Optical Fiber Monitoring	75
125	Abdesselam MEKROUD, Adel BOUCHAHED, Abdellah DRAIDI, Mohamed ASSABAA, Salah HAMMOUDI, Abdelfettah BOUSSAID	Enhancement of the DC Output Voltage of a Multilevel Boost Converter Using LQR Control.	76
139	Marta MIKIELEWICZ, Anna JAKUBCZYK-GAŁCZYŃSKA, Robert JANKOWSKI	Impact of Traffic-Induced Vibrations on People in Buildings: A Neural Network Study	77
147	Shengting Zhang, Rodrigo C.V. Coelho, Jing Li, Qingyuan Zhu, Keliu Wu, Zhangxin Chen	Geometry-Driven Optimization of Oil–Water Imbibition in Capillaries	78
146	Adnan CALIK, Nazim UCAR and A. Faruk ÖZDEMİR	Welding of Exotic Materials	79
148	Panpan ZHANG, Zongjie MU, Pengbo YIN, Qilong WEI, Shouceng Tian	A 3D method for evaluating the sphericity of proppant in the field of hydraulic fracturing	80
149	Senlin Luo, Guangqing Zhang, Bin Sun, Jia Qiao, Hao Li, Zhuang Li	The transformation of the microscopic fracture mechanism of rock induced by confining pressure and its macroscopic fracture response	81

153	Chouder Dalila,Belguerbi Ouafia ,Seid Lamria	Elaboration and study of hybrid material of polyvinyl alcohol / polypyrrole Cu-Ni	82
154	Chouder Dalila ,Belguerbi Ouafia, Seid Lamria	Electrochemical synthesis of polyaniline and his dipping by ions Ni ²⁺	83
182	Chouder Dalila Gouichiche Amina Belguerbi Ouafia Seid Lamria	Synthesis of chemical polyaniline and his dopage by metallic oxide	84
155	Gülşah ÇELİK GÜL, Şeymanur KÖSE, Ayşe Hatun POYRAZ, Seda BEYAZ	Dual-Pathway Optimization of Supercapacitor Components Using PEDOT-Fe ₃ O ₄ Electrodes and Borate-Enhanced HES Electrolytes	85
156	Gülşah ÇELİK GÜL, Fadime ÇOBAN	A Cost-Effective Microwave Route to Borohydroxyapatite: Crystallinity, Elemental Composition, and Vickers Hardness Evaluation	86
157	Souhila MEHERHERA, S.ALI KHOUDJA, S.ZEKARA, S.ABDI.	HYPERHOMOCYSTEINEMIA AND ALZHEIMER'S DISEASE	87
158	Souhila MEHERHERA, K.BAADJ,N.BAKEZZI, S. ABDI	HOMA AND TYG INDICES IN PATIENTS WITH METABOLIC SYNDROME: COMPARATIVE STUDY	88
160	Qilong WEI, Zongjie MU, Panpan ZHANG, Changhui ZENG, Pengbo YIN	A Noise Reduction Evaluation Method for coal petrology CT Images Based on Multi-index Fusion and Dynamic Weight Allocation	89
161	Elif Akgün Aslan, Mehmet Sezgin	Özel Öklid Lie Grubu SE(2)	90
162	Jasmina MARKOVIĆ-LIPKOVSKI, Nataša STANIĆ, Maja ŽIVOTIĆ, Marijana ZIMONJIĆ	The Benefits of Automation in Immunohistochemistry: Efficiency Standardization, and Cost Savings	91
166	Dr KHADER.N,GUERFI. Bahdja	Assessment of the oxidative stress on the human health in Algeria	92
172	Samia.BEROUAKEN,DAHMAS , Samia.ABDI	MOLAR BANDS MICROBIOLOGICAL CONTROL OF THE EFFECTIVENESS OF THE DISINFECTION PROCESS	93
176	<u>Xiaodi Li</u> , Hongkui Ge, Jianbo Wang, Jiantong Liu	Experimental Research on the Disturbance between Fractures and Crack Propagation in Hydraulic Fracturing of Conglomerates	94
179	Mengjie LI,Bei LV,Kaixin LIU,Yufei ZHANG, Junwang FU, Shiyuan LI	Experimental Investigation of Shear Friction Characteristics in Volcanic Rock Under In-Situ Shear-Enhanced Permeability Conditions	95
180	Sofiane ABERKANE, Hamza SEMMARI, Juan Carlos BRUNO, Alberto CORONAS	Investigation of an integrated organic rankine cycle combined with water/ lithium bromide absorption chiller for a petroleum process application	96
181	Cezary KRAŚKIEWICZ, Artur ZBICIAK, Przemysław MOSSAKOWSKI, Kacper WASILEWSKI	Assessment of the Tram Track Structure Condition Using Impulse Vibroacoustic Testing	97
185	Artan F.ALIDEMA, Frederik DARA	Solving Volterra Fuzzy Integral Equations Using the Fuzzy Sumudu Transform	98
187	Sid ali BOUBENDIR , Maamer MALKI, Salah LARBI , Kamel DJENDER	Effect of Lubricant Additives on Hybrid Lubrication Performance	99

190	Boutora SALIHA, Hamitouche ISMAIL, Dridi ISLAM	Enhanced Energy Optimization through IoT Smart Metering and AI-Driven Forecasting and Scheduling	100
191	Nour el islam BACHARI, ZEDDAM Chouaib, HAMDI Younes Lamine SALIM	New application for detecting desert soil change based on long-term satellite images	101
192	Nour el islam BACHARI, Lamri NACEF, Fouzia HOUMA	Hybrid statistical and artificial intelligence approach for forecasting wind speeds energy on the west coast of Algeria	102
194	Ulviye BUNYATOVA; Cengiz KOCUM; Sedat NAZLIBILEK; Kubra ERKAN TURKMEN	Sustainable Sensor for Monitoring and Deactivating Waterborne Pathogens in Contaminated Water Sources using functionalized metal nanoparticles	103
211	Ahmed BELGACEM, Renad RABIE, Hocine HADOUN, Lotfi FAGHI	Effect of the mass ratio of phosphoric acid on the chemical impregnation of a vegetal waste for the preparation of a porous material	104
212	Ahmed BELGACEM, Renad RABIE, Hocine HADOUN, Lotfi FAGHI, Insaf OULDBRAHIM	Green Synthesis of Mesoporous Activated Carbon from Plant Waste for Azo Dye Removal in Water Treatment	105
214	Morad HAMAD	Synergistic Evaluation of Ionizing Radiation Shielding in Novel Lead-Free Alloys Using Geant4 MC toolkit	106
215	Amer A. G. Al Abdel Hamid	Retarding Effect of the Mediating Sulfane (-S-) Group on Chelation Efficacy of Thiolic-Sulfur Toward Mercury in 2-(2-Mercaptothiazol-5-yl) acetic acid Derivative. DFT-Theoretical Study.	107
223	Demet SARIYER, Elif YILDIRIM	Learning from Neutrons: Machine Learning and Monte Carlo Synergy in Shielding Design	108
240	Nour el yakine YAHA, Akila BOUSTA, Sabah BRAHMI, Mohammed Salah BOUKHECHEM	Contribution to the study of the chemical composition and antioxidant activity of propolis from two regions in northern Algeria	109
254	Dr. Jana LIPKOVSKI, Prof. Dr. Aleksandar LIPKOVSKI	Numerical methods used in fire-protection simulations – a review	110
255	Besnik SARAMATI, Burim UKA, Fesal SELIMI, Behar RACI, Labinot KASTRATI	Microcontroller-Guided DIBH Phantom: A Low-Cost Training Tool for Patient Positioning in Radiotherapy	111
259	Behar RACI, Besnik SARAMATI, Burim UKA, Snezana STOJOVSKA, Igor STOJOVSKI, Arta KAMERI JUSUF, Ilir AHMETXHEKAJ, Meleq BAHTIJARI, Gezim HODOLLI, Violeta KLISAROVSKA, Labinot KASTRATI, Hekuran SEJDIU	Glioblastoma Multiforme: Case Report, Treatment, and Prognosis	112
261	Burim UKA, Polikron DHOQINA, Gëzim HODOLLI, Sehad KADIRI Labinot KASTRATI	The Potential and Difficulties of Using 3D Printing to Create Vaginal Applicators for Brachytherapy	113
263	Fisnik ALIAJ, Suela HOXHA, Teuta PUSTINA-KRASNIQI, Mirlind QERIMI	Optical Performance and Clinical Relevance of CAD/CAM Ceramic Materials	114

271	Gezim HODOLLI, Sehad KADIRI, Burim UKA, Labinot KASTRATI	Validation of the individual monitoring system for radiation workers through intercomparison tests	115
277	Hamdi ALIU, Zeynep Dengiz BALTA, Rreze GECAJ, Salih KUMRU, Fikir BALTA, Arben SINANI	Microbiological safety of artisanal honey: Detection of C. botulinum and other bacteria in Kosovo	116
278	Esad Behrami, Ditjona Shala, Blerina Kollani	Determination of Physico-Chemical Properties and Heavy Metals Lead (Pb), Cadmium (Cd), Aluminum (Al), Nickel (Ni), and Chromium (Cr) in Cabbage Cultivated in the Region of Prishtina and Prizren.	117
282	Nourdine OUALI, Fatma Zohra SI SALAH, Mahrez SAADEDINE, Nacira NAAR	VALORIZATION OF FARMING WASTE IN A COMPOSITE MATERIAL: MECHANICAL CHARACTERIZATION	118
12	F.Brik, K.Boukari, Z.Khaldouna and M.Taibi	Development and optimization of a smart wearable sensor for monitoring cardiac and respiratory signals	119
294	Mohammadreza Shahbazicholoo	Risk Management in Islamic Financial Systems: Alignment with International Standards	120
207	Sabrina. Benmebarek, Nadia Djouambi, Salima. Bacha, Imed Eddine Benmebarek, Bouzid Omar Boussaha, Aicha Beya Mammeria	Chemical study and valorization of the essential oil of Teucrium polium L. as a bioactive material for the development of a natural pharmaceutical formulation with anti-inflammatory purposes	121
222	Sabrina. Benmebarek , Nadia Djouambi, Salima. Bacha, Imed Eddine Benmebarek, Bouzid Omar Boussaha, Aicha Beya Mammeria	Biogenic Synthesis and Characterization of Zinc Oxide and Titanium Dioxide Nanoparticles Mediated by Plant Extracts	123
270	Fouad KERKAR, Djamel OUADJAOUT, Nabil KHELIFATI	Electrical Resistivity and Minority Carrier Lifetime Distribution in Directional Solidification of Silicon Ingot	125
274	Samy ANAS, Naima ZAOURAR BOUTAREK, Samir MANSOUR ,Faouzi MESSAOUD, Sofiane LATRECHE , P DAVID and E. MOSSANG	Nickel Zinc thin film for Hydrogen production	126
268	S. Anas Boussaa,K. Benfadel, L. Talbi , Y. Ouadah , A. Boukezzata ,A.Trade khodja, D. Allam , S. Hocine, A. Manseri, N.Zaourar Boutarek, B. Hamdoud and S. Kaci	Bismuth oxide electrode for CO2 conversion application	127
269	Sabiha ANAS BOUSSAA, Abdallah TRAD KHODJA , Messaouda AYACHI , Abderrahmane NAAS, Samy ANAS, Fatima BOUDEFFAR , Rabia RAHMOUNE, Bilal MERAZKA	Processing of recovery Si down to purified Si powder from SIREVIVAL PROJECT	128
235	Halil SOYAL	Strengthening Radiation Safety Education in the Pre-Internship Health Associate Degree Curriculum	129
236	Halil SOYAL, Mucize SARIHAN	Internal Radiation Alarm: Safety Awareness in Future Healthcare Workers	130

246	Mucize Sarihan	Assessment of cancer patients' concerns during radiotherapy: a radiation oncology perspective	131
247	Mucize Sarihan, Halil Soyal	Radiation safety and managerial ethical principles in healthcare services	133
251	Aykut KARADEMİR, Mucize SARIHAN	Evaluation of anxiety levels in cancer patients undergoing Ionizing radiation therapy due to side effects	134
231	Osman GÜNAY, Fahrettin Fatih KESMEZACAR, Yağmur İdil ULUSOY , Duygu TUNÇMAN KAYAOKAY, Özge DEMİR, Songül KARAÇAM, Eren ÖZGÜR, Nami YEYİN, Rabia Lebriz USLU BEŞLİ, Mustafa DEMİR	Manufacturing and Printing of Urogenital System Organs	135
232	Osman GÜNAY, Görkem SERBES, İsmail CANTÜRK, Caner YALÇIN, Mutlu İÇHEDEF, Caner TAŞKÖPRÜ, Murat SAÇ	Radon Concentration Variations in the Adalar District, Istanbul	136
264	Osman GÜNAY, Ümmühan ZENGİN ÖZER, Muhammet Mert ÇELİK	PET/CT versus Conventional Imaging in Cancer Diagnosis: Evidence from a Comprehensive Meta-Analysis	137
233	Cemre Serdem BİLİR, Osman GÜNAY, Fahrettin Fatih KESMEZACAR, Özge COŞKUN SAĞLAM, Berrin YALÇIN, Murat DOĞAN	Organ-Specific Dosimetry in Ovarian Vein Embolization	138
120	Salah BOUTALEB, Krimo AZOUAOUI, Amar MESBAH	Influence of Non-Homogeneous Interphases on the Elastic Behavior of Polymer Nanocomposites – A micromechanical Modeling	139
196	Fateh Enouar MAMACHE, Amar MESBAH	Multiphysics Micromechanical Modeling of PVDF/BaTiO ₃ Composites with Strain-Induced Phase Transformation	140
135	Dr.GUERFI. Bahdja, KHADER.N, Bellahcene. I, ZOUANI.A, HADHOUM N, BENZIANE. L, GUERCH. A, HAMLAOUI.S.HADJADJ AOUL.F. Z	THERAPEUTIC EDUCATION OF PATIENTS IN PHARMACIES:CURRENT STATES.	141
241	Youcef BOUTORA, Safia AIMEUR, Noureddine TAKORABET, Saliha BOUTORA	Design of permanent magnets for sinusoidal waveform of airgap induction in slotless synchronous machines	142
225	BOBOCIOIU Ema, KERKAR Fouad, ANAS BOUSSAA Sabiha,NAAS Abderrahmane, HAZMOUNE Abdessalam	Mechanical and microstructural study of silica intended for photovoltaic siliconproduction	144
226	BOBOCIOIU Ema, KERKAR Fouad, ANAS BOUSSAA Sabiha,NAAS Abderrahmane, HAZMOUNE Abdessalam	Valorisation of Algerian quartz vein deposits as source of energy	145

FOREWORD



Dear Colleagues,

I am pleased to host you all in “**12th International Conference on Computational and Experimental Science and Engineering (ICCESSEN-2025)**”. The conference has been taken place in the period of 17-20 October, 2025 in Kemer-Antalya (Turkey) which is one of the best known holiday center in the World. The ICCESSEN-2025 will provide excellent international forum and covers highlights about new results in the wide spectrum of categories from science and engineering in theory, methods and applications and also social science in this year. The participants will have the opportunity to take part in the presentation of plenary lectures, contributed papers of both oral and poster session types, and of their scientific discussions. There are 10 different theme in ICCESSEN-2025 and planning enlarge this topic in future.

Those are;

- Theme 1. Physical Science and Technology
- Theme 2. Mathematical Science and Applications
- Theme 3. Energy and Applications
- Theme 4. Earth Science and Applications
- Theme 5. Engineering Science and Applications
- Theme 6. Material Science and Applications
- Theme 7. Biological and Medical Science and Applications
- Theme 8. Education Technologies and Applications
- Theme 9. Agricultural Science and Technology
- Theme 10. Forestry and Environmental Science and Engineering

I hope that all participants will enjoy their visit and stay in Antalya-Turkey and also hoping to meet you again in somewhere else in Turkey for ICCESSEN-2025.

Prof. Dr. İskender AKKURT
Chairman of the ICCESSEN

ORGANISATION COMMITTEE

Prof.Dr. Iskender AKKURT (Chair)	Suleyman Demirel University, Isparta -Turkey
Dr. Kadir GÜNOĞLU (secretary)	Isparta Uygulamalı Bilimler University, Isparta -Turkey
Dr. Hakan AKYILDIRIM	Suleyman Demirel University, Isparta -Turkey
Dr. Sabiha Anas BOUSSAA	CRTSE-Algeria
Dr. Ahmet BEYÇİOĞLU	Adana Bilim Teknoloji University, Düzce -Turkey
Dr. Nilgün DEMİR	Uludag University, Bursa -Turkey
Dr. Ozge Kozguş GÜLDÜ	Ege University, İzmir-Turkey
Dr. Osman GÜNAY	Yıldız Technical University, Istanbul -Turkiye
Dr. Ümit KARA	Suleyman Demirel University, Isparta -Turkey
Dr. Nurdan KARPUZ	Amasya University, Amasya -Turkey
Dr. Feride KULALI	Üsküdar University, Istanbul-Turkey
Dr. Zehra Nur KULUÖZTÜRK	Bitliseren University, Bitlis-Turkey
Dr. M. Fatih KULUÖZTÜRK	Bitliseren University, Bitlis-Turkey
Dr. Aycan ŞENGÜL	Akdeniz University, Antalya-Turkiye
Dr. Hüseyin Ozan TEKİN	Üsküdar University, Istanbul-Turkey

SCIENTIFIC COMMITTEE

Prof.Dr. Iskender AKKURT (Chair)	Suleyman Demirel University, Isparta –Turkey
Prof.Dr. Majid ABBASPOUR	Sharif University of Technology-Iran
Prof.Dr. Zahid Hussain ABRA	Quadi-E-Awam University, Sindh-Pakistan
Prof.Dr. Abdullah ALAMRI	King Saud University, Saudi Arabia
Prof.Dr. Şemsettin ALTINDAL	Gazi University, Ankara-Turkey
Prof.Dr. Nezam Mahdavi-AMIRI	Sharif University Iran
Dr. Sabiha Boussaa ANAS	CRTSE-Algeria
Dr. John R.M.ANNAND	Glasgow University, Glasgow-Scotland (UK)
Dr. Majda AOUITTEN	Abdelmalek Essaadi University-Morocco
Prof.Dr. Mohamed Kheireddine AROUA	University of Malaya-Malaysia
Dr. Ümit AYATA	Bayburt University,Bayburt-Turkey
Dr. Rachid BELKADA	CRSTSE -Algeria
Dr. Radhey S BENIWAL	CSIR-NISCAIR, New Delhi 110012, India
Dr. Mahmoud Abdullah BENNASER	Kuwait University-Kuwait
Dr. Djoudi BOUHAFS	Centre de Recherche en Technologie -Algeria
Prof. Oleg BURDAKOV	Linköping University Linköping, Sweden
Dr. Yusuf CEYLAN	Selcuk University, Konya-Turkey
Prof.Dr. Lotfi CHOUCANE	Weill Cornell Medical College-Qatar
Dr. Manju D CHOUDHARY	Niscair-India
Dr. Nermin DEMİRKOL	Kocaeli University, Kocaeli –Turkey
Prof.Dr. İbrahim DİNÇER	University of Ontario Institue of Technology (UOIT)-Canada
Prof. Dr. Mitra DJAMAL	Institute Teknologi Bandung-Indonesia
Prof.Dr. Mahmut DOĞRU	Fırat University, Elazığ-Turkey
Prof.Dr. Mohammed Mostafa EL TOKHI	United Arab Emirates University-UAE
Dr. Zuhale ER	Istanbul Technical University, Istanbul-Turkey
Prof.Dr. Mustafa EROL	Dokuz Eylul University, İzmir-Turkey
Prof.Dr. Madjid FATHI	Dept. of EECS University of Siegen- Germany
Prof.Dr. Jan FELBA	Wroclaw University of Technology-Poland
Prof.Dr. S. Mostafa GHIAASIAAN	Mechanical/Nuclear Engineering, Georgia Tech USA
Prof.Dr. Mustafa GÜNAL	Gaziantep University, Gaziantep-Turkey
Prof. Dr. Amir HUSSAIN	Edinburgh Napier University, Edinburgh- Scotland(UK)
Dr. Nabi IBADOV	Warsaw University of Technology-Poland

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA-TURKEY

Dr. Ahmed Abed IBRAHIM	Kirkuk University, Kirkuk-Iraq
Prof.Dr. Fatma KARİPCİN	Nevşehir Hacı Bektaş Veli University-Turkey
Prof.Dr. Hamdi Ş. KILIÇ	Selcuk University, Konya-Turkey
Dr. Menekşe V. KILIÇARSLAN	İstanbul Aydın University, Istanbul-Turkey
Prof.Dr. Ziya Erdem KOÇ	Selcuk University, Konya-Turkey
Prof. Dr. İsmail KOYUNCU	Istanbul Technical University, Istanbul-Turkey
Dr. Irida MARKJA	Polytechnic University, Tirana-Albania
Prof. Dr. F.Zümrüt Biber MÜFTÜLER	Ege University, Izmir-Turkey
Dr. Susan Shukur NOORI	Kirkuk University, Kirkuk-Iraq
Prof.Dr. Ravindra NUGGEHALI	New Jersey Institute of Technology-USA
Prof.Dr. İbrahim ÖRÜN	Aksaray University, Aksaray-Turkey
Prof.Dr. Necati ÖZDEMİR	Balıkesir University, Balıkesir-Turkey
Dr. Zeynep PARLAR	Istanbul Technical University, Istanbul-Turkey
Prof.Dr. Ioana G. Petrisor	ToxStrategies, Inc., Mission Viejo, CA
Dr. Tomasz PIOTROWSKI	Warsaw University of Technology, Warsaw-Poland
Prof.Dr. Javad RAHIGHI	AEOL, Tehran-Iran.
Dr. Abdelmadjid RECIOUI	University of Boumerdes-Algeria
Prof.Dr. Osman SAGDIÇ	Yıldız Technical University, Istanbul-Turkey
Prof.Dr. Miljko SATARIC	Faculty of Technical Sciences Novi Sad-Serbia
Prof.Dr. Saleh SULTANSOY	TOBB University, Ankara-Turkey
Dr. Naim SYLA	University of Prishtina-Kosova
Prof. Dr. Mustafa TAVASLI	Uludag University, Bursa-Turkey
Prof. Dr. Huseyin TOROS	Istanbul Technical University, Istanbul-Turkey
Prof.Dr. Ahmad UMAR	Najran University-Saudi Arabia
Prof.Dr. Gerhard-Wilhelm WEBER	Poznan University of Technology-Poland
Prof.Dr. Erol YAŞAR	Mersin University, Mersin-Turkey

INVITED SPEAKERS

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA-TURKEY



Sustainable Development in the Global Rankings

Prof.Dr. Mansour Almatarneh

University of Jordan-Jordan

ABSTRACT

The seminar will examine how universities promote sustainability and measure these efforts by three major global rankings: QS Sustainability, THE Impact, and GreenMetric. We will analyze the criteria and impact of each ranking, focusing on their assessment of environmental impact, social justice initiatives, governance, and contributions to the UN's Sustainable Development Goals. The seminar aims to highlight the role of these rankings in encouraging universities to adopt sustainable practices and their influence on university policies and operations towards a more sustainable future.

** Corresponding Author Email : m.almatarneh@ju.edu.jo*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA-TURKEY



**Artificial Intelligent as a Concept or as a System: utilizing
and conceptualizing AI in Industrial and health care**

Madjid FATHI[✉]

University of Siegen, GERMANY

ABSTRACT

Knowledge Technology for progressive Quality in Agricultural economy recently belong to the most development issues in the agricultural economics also in food industry. Based on that it has been introduced numerous challenges for novel marketing strategies, efficient management in practical approaches for food consumption. There are integrated technologies addressing these multifaceted challenges and requires a heightened emphasis on improving the quality of various aspects within this dynamic process. By approaching AI as a concept should be defined as association of some progressive aspect like federated learning, Decision support, sentiment analysis and Recommender systems. These all are linking each other navigating, searching, collecting Data, information and Knowledge through a production process, environmental insights, extensive extracted knowledge from text. It will be able to accumulate experiential info's, significant challenge for human resources. We applied AI as a system than we describe multi-dimensional algorithms as nested subroutine which can be called as intelligent Algorithm. This kind of resources and their necessitates for effective approach in today's "Society 5.0" is to optimize and improve, health care and environment. Of course, cyber-technologies is able ability to prove instrumental because of huge data fusion, and offer lot more possibilities to improve qualities in advanced and professional industrial development. Artificial Intelligence (AI) algorithms should have the abilities processing complex tasks, but their solutions often demand extended time or remain unattainable due to time-sensitive data availability. Developing AI algorithms becomes paramount in enhancing our ability to comprehend the intricacies inherent in the challenges we seek to address. AI need more transparency and open sources to be accurate for precision approaches.

[✉] *Corresponding Author Email : fathi@informatik.uni-siegen.de*



Advancing High-Performance Solar Cells with Ca₃NCI₃ Perovskite A3BX3-Type Absorbers for Next-Generation Photovoltaics

Dr. Hayat ARBOUZ

University Saad Dahlab Blida1, Algeria

ABSTRACT

Calcium-based inorganic perovskites of the formula Ca₃BX₃ are emerging as promising, environmentally friendly candidates for photovoltaic applications, particularly as absorbers for single and tandem solar cell structures, due to their advantageous optoelectronic characteristics and thermodynamic stability. This study focuses on the numerical simulation and subsequent optimization of a photovoltaic cell whose absorber layer is the perovskite material Ca₃NCI₃ with a wide bandgap energy of 1.66 eV. A configured reference structure: ITO/SnS₂/Ca₃NCI₃/P3HT/Ag was used as a reference. A theoretical approach was carefully developed to evaluate critical device parameters such as power conversion efficiency (PCE), open-circuit voltage (Voc), short-circuit current density (Jsc) and fill factor (FF). The variation of these parameters as a function of the intrinsic properties of the materials making up the absorber and the surrounding transport layers was evaluated according to the established simulation model. Analysis of the contours of key cell parameters under the action of combined physical parameters, as well as of the current-voltage characteristic curve, has enabled the evaluation of the performance of the basic structure, as well as structures based on numerous alternative carrier transport layer materials under different conditions, and to define an optimized structure that performs better (PCE = 22%) than the basic one (PCE = 18.5%) and that can serve as an adequate top sub-cell in a more elaborate tandem device capable of achieving conversion efficiencies of over 25% in different outdoor temperature conditions. The aim of this study is to develop stable, non-toxic, high-efficiency perovskite solar cells.

Keywords: *Solar Energy, Perovskite, Simulation, Inorganic*

✉ *Corresponding Author Email: arbouzhayet@yahoo.fr*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA-TURKEY



**Regime-switching models via stochastic optimal control &
robust control theory, with applications in finance and
insurance**

Prof.Dr. Gerhard-Wilhelm WEBER
Poznan University of Technology-POLAND

ABSTRACT

This presentation consists in newest advancements in both (i) stochastic optimal control and games with jumps in finance under delay and regime switching, and (ii) stochastic optimal control and games in pension fund systems with new elements of regime switching and longevity. (iii) Time is reserved to enjoy the beauty of the underlying and employed mathematics, to discussions about pros and cons of different approaches, e.g., maximum principle vs dynamic program and Isaacs-Hamilton-Jacobi-Bellman equation, as well as to outlooks at future studies and applications, such as in physics, neuroscience and cosmology.

Keywords: *Optimal control and applications, Optimization under uncertainty and applications, SS - Optimal and stochastic optimal control and games*

✉ *Corresponding Author Email : gerhard.weber@put.poznan.pl*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA-TURKEY



Trustworthy AI-enabled Sustainable Technologies

Prof. Dr. Amir HUSSEIN
Edinburgh Napier University, UK

ABSTRACT

✉ *Corresponding Author Email :*

PRESENTATIONS

Abs. No: 279

OPPORTUNITIES AND LIMITATIONS OF ARTIFICIAL INTELLIGENCE-BASED VISUALISATION TOOLS IN ARCHITECTURAL REPRESENTATION

Rıza Fatih MENDİLCİOĞLU^{1✉}

*¹Başkent University, Faculty Of Fine Arts, Architecture and Design, Interior Architecture and Env.
Design Department, Ankara-TÜRKİYE*

ABSTRACT

Digital design tools, which form the basis of contemporary architectural practice, are constantly redefining the conceptual framework and methodologies of the discipline. Digital visualisation and representation software has become indispensable in concretising design ideas and securing project approval. Thanks to advancing computer technologies, these tools contribute significantly to the design process, particularly in lighting production and material representation. The introduction of artificial intelligence technologies has created new opportunities such as ease of use and speed in visualisation, while beginning to replace traditional physics-based systems. However, inaccuracies in light and material representation produced by AI tools have prompted criticism within architectural circles.

This study comparatively examines AI-supported and physics-based visualisation tools in terms of material representation and lighting simulation performance. The aim is to evaluate both technologies comprehensively in the context of design quality, efficiency, and professional applicability, highlighting the opportunities and limitations of AI-based tools. Three interior designs modelled with the 3D Max programme are visualised using traditional tools such as Corona and V-Ray, and AI systems including ChatGPT and Claude. The results are assessed separately for material accuracy and lighting quality. A mixed research approach is employed.

In conclusion, the findings indicate that AI-supported systems offer clear advantages in efficiency, but physics-based engines deliver more reliable results in material representation and light simulation accuracy. These results suggest that no single technological solution satisfies all requirements of architectural practice. Instead, different tools may be most appropriate at different phases of the design process.

Keywords: *Digital architecture, artificial intelligence visualisation, architecture.*

[✉] *Corresponding Author Email: rizafatihl@gmail.com*

Optimizing roasting processes in rotary kilns for iron-nickel ores

Zarife BAJRAKTARI GASHI¹, Izet IBRAHIMI^{2*}

^{1/2}University "Isa Boletini "Mitrovica, Department Materials and Metallurgy, Mitrovica-KOSOVO

^{1,2}Faculty of Geoscience, Department Materials and Metallurgy, Republic of KOSOVO

ABSTRACT

This paper presents the results of a project aimed at optimizing the roasting processes in rotary kilns used for processing iron-nickel ores. Due to the low nickel content and high moisture levels in iron-nickel ores, the roasting process encounters numerous challenges, necessitating technological interventions to enhance efficiency and improve the quality of the final product. The project involved significant modifications to the body and structure of the rotary kilns, including: Installation of shovels in the body of rotary kilns

- In the first zone, longer shovels were installed to ensure uniform load distribution and more efficient mixing.
- In the second zone, shorter shovels were used to enable optimal heat penetration.
- In the roasting zone, conical shovels were implemented to enhance the pre-reduction rate.

Replacement of refractory material: The previous fireclay material was replaced with reinforced thermoconcrete, resulting in improved thermal resistance and overall process efficiency. **Results:** Implementing these changes demonstrated substantial improvements in process performance: Pre-reduction rate: Increased from 46.97% in 2018 to 51.14% in 2019, and 53.9% in 2020. Average furnace temperature: Increased from 738°C in 2018 to 751°C in 2019, and 760°C in 2020. These advancements contribute to reducing energy consumption and ensuring a higher-quality composition of the processed material. The adoption of optimized blades and advanced refractory materials has established a successful model for enhancing metallurgical processes in rotary kilns. In the future, pre-drying the ore prior to roasting will remain a critical step for further optimizing this process.

Keywords: Rotary kiln, Calcine, Pre reduction etc

✉ Corresponding Author> izet.ibrahimi@umib.net

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:7

**Macroseismic evaluation of the location in Rahovec for the
installation of solar panels**

Nazmi HASI¹, Latif HASI²

¹ *Mitrovica University, „Isa Boletini” Materials and Metalurgy Department, Mitrovica-KOSOVA*

² *Prishtina University, „Hasan Prishtina” Mechanical Engineering Department, Prishtina-KOSOVA,*

ABSTRACT

Macroseismic assessment is of particular importance for the behavior of engineering structures and other structures of interest to society under the effects of earthquakes. This refers not only to the location of the structures themselves, but also to their wider surroundings. When designing a location for the installation of solar panels, it is necessary to meet several conditions that will allow obtaining high-quality seismic and seismic wave data and determining earthquake parameters with the best possible accuracy. This will provide high-quality seismological data, which are of interest to seismology and earthquake engineering. The accuracy of the earthquake parameters, the geographical coordinates of the epicenter, the hypocentral depth and the hypocentral time (the time at which the earthquake occurred) are a number of factors that affect the macroseismic assessment of a given location.

Keywords: *macroseismic, evaluation, earthquake*

✉ *Corresponding Author Email* : *latif.hasi@uni-pr.edu*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:13

**Antioxidant activity of essential oils and ethanolic extracts of
four medicinal plants alone and in combination**

Bedjou Fatiha, Meddas Meriem and Chekkal Tadjajikt

*Department of Physico-Chemical Biology, Faculty of Life Sciences, University of Bejaia, Bejaia
(06000) Algeria*

ABSTRACT

The present work aims to evaluate the antioxidant activity of ethanolic extracts and essential oils of aromatic plants of the Lamiaceae family: *Thymus algeriensis* and *Salvia rosmarinus*, and Anacardiaceae: *Pistacia lentiscus*, Myrtaceae: *Eucalyptus polybractea*. The polyphenols were measured using the Folin-Ciocalteu method; the results showed that the essential oils studied as well as the ethanolic extracts are relatively rich in polyphenols. Their antioxidant properties were tested by the synthetic DPPH radical trapping method. The IC₅₀ values were determined according to the graph representing the percentage of inhibition of the DPPH radical by essential oils and by ethanolic extracts, according to our results there is a correlation between the level of polyphenols present in the different essential oils and different ethanolic extracts and their ability to neutralize free radicals. Several combinations were carried out between the essential oils and also between the ethanolic extracts in order to determine the type of interactions existing between the combined substances, the results were represented in the form of isobolograms. Additive and super-additive effects were observed in combinations of essential oils, and super-additive and sub-additive effects were observed for combinations of ethanolic extracts.

Keywords: : *Essential oils, ethanolic extracts, Combination*

✉ *Corresponding Author Email*
fatihabedjou2015@gmail.com,

fatiha.nasri@univ-bejaia.dz or

***Towards a Bio-Inspired Approach for the Optimization of
Product Distribution in a Transport Company***

Yachba KHEDIDJA[✉], Bouamrane KARIM²

¹ Oran Graduate School of Economics, Second Cycle Department, Oran, Algeria

² Oran 1 University, Computer Science Department, Oran, Algeria

ABSTRACT

One of the primary objectives of any company is to achieve high levels of customer satisfaction, which is often regarded as a top priority. This highlights the central focus of businesses on the customer experience and the efficiency with which their needs are met. In this context, ensuring the timely and cost-effective delivery of products plays a crucial role in maintaining customer satisfaction.

This work addresses the challenge of optimizing the distribution of final products across multiple repositories dispersed throughout the national territory. The problem under consideration incorporates several critical constraints: the distance traveled during product deliveries, the cost of fuel consumption, and the allocation of drivers for each delivery route. These factors significantly influence the overall efficiency, cost management, and environmental impact of the distribution process.

To tackle this complex problem, the optimization method employed is the genetic algorithm, a robust technique within the family of evolutionary algorithms. Genetic algorithms are particularly well-suited for solving such multi-constraint and large-scale optimization problems due to their ability to explore vast solution spaces and converge toward optimal or near-optimal solutions.

The use of genetic algorithms allows for the consideration of multiple objectives and constraints simultaneously, ensuring that the final distribution strategy minimizes costs and resource usage while maintaining a high level of service quality. By employing this approach, companies can streamline their logistics operations, reduce environmental impact, and ultimately enhance customer satisfaction.

Keywords: *Genetic algorithm, Optimization, Logistics, Transport, Repository, Distribution*

[✉] Corresponding Author Email : yachbakhadidja@yahoo.fr

Integrating Computational Modeling with Experimental Methods in Bending Behavior Analysis of Round Rods

Rilinda RAÇI¹, Latif HASI^{2✉}

¹ *University of Prishtina, Faculty of Mathematics and Natural Sciences, Prishtinë, Kosovë*

² *University of Prishtina, Faculty of Mechanical Engineering, Prishtinë, Kosovë*

ABSTRACT

The integration of modeling software into scientific research has gained significant traction as a reliable complement to traditional experimental methods. This study investigates the mechanical behavior of round rods under three-point bending tests, combining experimental procedures with computational simulations. In the experimental setup, a downward force (F) is applied at the center of the rod while the resulting flex (Δx) is recorded, allowing the calculation of the effective stiffness ($F/\Delta x$). By varying the distance between the anvils, the study measures the relationship between stiffness and beam length, yielding data to determine the Flexural Elastic Modulus of the material. Computational simulations using ANSYS software are employed to model the same parameters and can be extended for additional measurements. The findings validate the experimental results and highlight the ability of computational modeling to predict material behavior. This approach provides critical insights into material properties, enabling the modeling of real-world applications where these materials are utilized. By emphasizing the synergy between experimental and computational methods, this study underscores the growing importance of modeling software in engineering research and education.

Keywords: *Three-point bending test, Finite element analysis (FEA), ANSYS simulation*

✉ Corresponding Author Email: latif.hasi@uni-pr.edu

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No: 23

***Application of flory patterson theory on the volumetric
properties of liquid mixtures 1,2- dichloroethane with
diethylether and diispropylether***

**BOUSSAID Linda¹, AMIRECHE Fouzia², BENSIRADJ Nour El Houda³, ZOUAGHI
Nafila⁴, BESSILA Souad⁵**

^{1,2}Crystallography-Thermodynamics laboratory. Faculté de chimie. Université des Sciences et de la
Technologie Houari Boumediene .USTHB

³Laboratoire de Chimie Théorique Computationnelle et Photonique Faculté de chimie. Université des
Sciences et de la Technologie Houari Boumediene. USTHB

⁴Laboratoire d'étude et de développement des techniques de traitement et d'épuration des eaux et de
gestion environnementale. Ecole Normale Supérieure, Kouba

⁵Laboratoire d'étude et de développement des techniques de traitement et d'épuration des eaux et de
gestion environnementale. Ecole Normale Supérieure, Kouba

ABSTRACT

The physico-chemical properties of liquids materials in the industrial field, in general, and in that of the chemical industrie in particular, constitutes a prerequisite for the design of equipment, for the resolution of specific problems (related to the techniques of purification and separation, at risk in the transport of certain materials, etc.) and therefore, at the production stage. Choloalkanes, ethers constitute three chemical families having an industrial, theoretical and environment interest. For example, these compounds are used in various application in the chemical and pharmaceutical industries. In addition, they contribute to the partial thermodynamic behavior (deviation from ideality, association, etc.) of certain mixtures which constitute a severe test for predictive theoretical models. Finally, due to the degradation of the environment in the world, a renewed interest is observed for ethers, because some of their physicochemical properties could contribute to lower pollution (ethers would be used as additives in aqueous fuels). This work is a thermodynamic, experimental and theoretical study of the volumetric properties of liquid binary systems formed from compounds belonging to the chemical families of chloroalkane, ethers, having an industrial, theoretical and environmental interest. Experimental determination of the interval [283.15 – 303.15] K and at atmospheric pressure, using an Anton-Parr vibrating tube densitometer of the DMA 5000 type. This contribution of experimental data, on the volumetric properties of the binary liquid mixtures of 1,2 – dichloroethane with an ethers, supplemented by an application of the theoretical model of Prigogine-Flory-Patterson (PFP), will probably contribute to the enrichment of the thermodynamic database and the further development of the theory of Flory in its Prigogine-Flory-Patterson (PFP) version, for a better understanding of the thermodynamic behavior of these liquid binary mixtures.

Keywords: Prigogine-Flory-Patterson (PFP), Volumetric Properties Excess Volume, Ethers.

✉ Corresponding Author Email : linda.boussaid@hotmail.fr boussaidlinda13@gmail.com

Explicit formula and Prime Number Theorem for zeta Function on Function Field and Its Applications

Kajtaz Bllaca

University of Prishtina, Faculty of Mathematics and Natural Sciences, Department of Mathematics

ABSTRACT

First published in Riemann's groundbreaking 1859 paper (Über die Anzahl der Primzahlen unter einer gegebenen Grosse, Monatsber. Konigl. Preuss. Akad. Wiss. Berlin, (1859), 671—680), the Riemann hypothesis is a deep mathematical conjecture which states \pause that the nontrivial Riemann zeta function zeros, i.e., the values s other than $-2, -4, -6, \dots$ such that $(\xi)s=0$ where

$$\zeta(s) = \sum_{n=1}^{\infty} \frac{1}{n^s}$$

is the Riemann zeta function all lie on the "critical line" $\text{Re}(s) = 1/2$

Explicit formulas in number theory first appeared in the works of Riemann and von Mangoldt.

The most famous among them is the explicit formula obtained by von Mangoldt.

$$\zeta(s) = \sum_{p^k \leq x} \log p = x - \sum_p \frac{x^p}{p} - \frac{\zeta'}{\zeta}(0) - \frac{1}{2} \log(1 - x^{-2}).$$

The sum on the left is taken over all prime powers, and the sum on the right is taken over the non-trivial zeros of Riemann zeta function.

The behavior of zeta functions in the critical strip has received a lot of attention since the first proof of the prime number theorem. Special values of zeta functions often carry relevant arithmetic or geometric information on the objects that were used to define the zeta functions. Especially the value at the central point $s = 1/2$ is an important property and subject of intensive study.

In this talk we:

Formulate a theorem giving an upper bound for the multiplicity of the eventual zero at $1/2$ of functions in the Selberg class and to the automorphic L-functions attached to irreducible unitary

automorphic representations of $GL_N(\mathbb{Q})$.

Formulate a theorem for the location of the first zero with positive imaginary part of functions in a certain subclass of the extended Selberg class and apply our results to automorphic L-functions attached to irreducible unitary automorphic representations of $GL_N(\mathbb{Q})$.

Give an explicit formula for the zeta function ξ_K of K of genus g over a finite field \mathbb{F}_q .

Formulate a theorem of bounding the order of the central zero of a zeta ξ_K of K of genus g over a finite field \mathbb{F}_q .

Keywords: *Zeta function, Explicit formula, Riemann hypothesis*

✉ Corresponding Author Email : kajtaz.bllaca@uni-pr.edu

Deep Neural Networks For Transmission Line Fault Diagnosis

Chelli ZOUBIR^{1✉}, Tarek KHOULDIA²

¹*Department of Electrical Engineering, Mohamed Chérif Messaadia University, P.O. Box 1553, Souk Ahras 41000, ALGERIA*

²*Department of Mechanical Engineering, Mohamed Chérif Messaadia University, P.O. Box 1553, Souk Ahras 41000, ALGERIA*

ABSTRACT

One of the most crucial parts of the power system are power transmission lines, and identifying their flaws has grown in popularity. Nonetheless, short circuits are the primary failure type to which a transmission network is susceptible. This research proposes a deep neural network (DNN) model-based monitoring system to establish an accurate diagnosis of short circuit problems. Key indices have been computed from the gathered current signals in order to train and test the DNN. The network's output uses a variety of error codes. To determine the optimal neural network, the Levenberg-Marquardt learning algorithm has been used to optimize the DNN's hidden layer. As a result, the suggested approach works well for diagnosing and tracking a number of other industrial issues.

Keywords: *Transmission lines 1, Electrical indicators 2, Deep Neural Network (DNN) 3*

[✉]*Corresponding Author Email : zoubir.chelli@univ-soukahras.dz*

Abs. No: 31

***Electrochemical characterization of a composite
(PANI/PEDOT:PSS) for application in supercapacitors***

**Naima Boudieb^{*,1,2}, Mohamed LOUCIF SEIAD³, Imad RATI^{1,2} and Imane
BENAMMANE^{1,2}**

*1,2 University M'Hamed BOUGARA, UMBB, Boumerdes/Faculty of Sciences/Department of
Chemistry,*

*2Laboratory of Treatment and Formation of Fibrous Polymers, Faculty of Technology LTMFP,
Algeria.*

3Center for the Development of Advanced Technologies (CDTA)/Algeria

ABSTRACT

The aim of this study is to synthesis of a copolymer PANI/PEDOT:PSS by electrochemical means to apply in supercapacitors. Polyaniline (PANI) is a conductive polymer, it was synthesized by electrochemical polymerization. It exhibits very stable properties in different environments, whereas PEDOT:PSS is a conductive polymer based on poly(3,4-ethylenedioxythiophene) (PEDOT) and poly(styrene sulfonate) (PSS). It is commonly used with polyaniline to improve its electrical conductivity. Several physico-chemical and electrochemical techniques were used for the characterization PANI/PEDOT:PSS: cyclic voltammetry (VC), electrochemical impedance spectroscopy (EIS), open circuit potential, SEM, X ray diffraction...etc. The results showed that the PANI/PEDOT: PSS composite is a promising material for supercapacitors due to its high electrical conductivity and high porosity.

Electrochemical and physicochemical characterization tests have shown that the composite has high electrical and structural performances, making it a material of choice for high-performance energy storage applications.

Keywords : energy storage, supercapacitors, SIE, VC, PANI, poly(3,4-ethylenedioxythiophene) (PEDOT), poly(styrene sulfonate) (PSS)

[✉]Corresponding author: n.boudieb@univ-boumerdes.dz

Abs. No: 34

Prediction of compressive strength of concrete modified with marble waste powder using artificial intelligence model

Rachid DJEBIEN^{1✉}, Yasmina KELLOUCHE²

¹*20 august 1955 University, Civil engineering Department, Skikda - Algeria*

²*Djilali Bounaama University, Earth science Department, Khemis meliana - Algeria*

ABSTRACT

Marble quarrying activities are accompanied by the generation of huge quantities of waste. Several studies demonstrated the beneficial effect of marble waste on fresh and hardened concrete properties. This work aims to predict the compressive strength of concrete based marble waste. Using data from previous studies investigated the effect of marble waste on properties of concrete, a model based on artificial neural networks was built using six parameters including cement content, water/binder ratio, marble powder content, superplasticizer content, and testing age as the model input parameters. The results obtained showed that using best iterations with different architectures, the model built exhibited an accurate prediction of the compressive strength with higher correlation of 99%.

Keywords: *Concrete, Marble, Compressive strength, Model, Artificial intelligence.*

[✉]*Corresponding Author Email : dj_rachid_08@yahoo.fr*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No: 35

Modeling the thermal conductivity of some metals

Naim SYLA¹, Fisnik ALIAJ¹ and Eros Halili^{✉,1}

¹ *University "Hasan Prishtina" Prishtinë, FMNS, Eqrem Çabej pn., 10000 Prishtina, Kosovo*

ABSTRACT

This study investigates the thermal conductivities of three different metals—aluminum, bronze, and stainless steel—using both experimental measurements and Finite Element Method (FEM) simulations. The TD-8513 Heat Conduction Apparatus was used to analyze temperature variations along metal rods, with thermistors placed at specific positions to measure the transient temperature field. The metal rod was subjected to a heat flux, causing temperature variations along its length. A finite element model (FEM) was developed to simulate heat conduction in the rods, employing the SOLID70 thermal element for meshing. The experimental and FEM simulation results showed a consistent trend, indicating compatibility. These findings validate the accuracy of FEM in modeling thermal conduction and demonstrate the effectiveness of numerical methods in predicting heat transfer behavior in metallic materials.

Keywords: *Finite Element Modeling (FEM), thermal conductivity, metal, transient heat transfer, temperature distribution.*

[✉] *Eros Halili, eroshalili@gmail.com*

Abs. No: 50

Application of Artificial Intelligence for Fault Diagnosis in Bevel Gears Using Vibration Analysis

Khoualdia Tarek^{1,2✉}, Chelli Zoubi³, Guerti Nasreddin², Lakikza Abdelmalek²

¹ *Mohamed Chérif Messaadia University, Mechanical Engineering Department, Souk Ahras-ALGERIA,*

² *Mohamed Chérif Messaadia University, Laboratoire de Recherche en Électromécanique et Sécurité de Fonctionnement (LRESF), Souk Ahras-ALGERIA,*

³ *Mohamed Chérif Messaadia University, Electrical Engineering Department, Souk Ahras-ALGERIA.*

ABSTRACT

The early detection of faults in bevel gears is crucial for preventing catastrophic failures and minimizing downtime in industrial machinery. This study explores the application of artificial intelligence (AI) techniques for diagnosing faults in bevel gears based on vibration indicators. A comprehensive dataset of vibration signals from healthy and faulty gears is collected and preprocessed to extract relevant features. A piezoelectric sensor collects signals in three directions: two radial and one axial, from which it calculates the main vibrational indicators. Support vector machines (SVM), random forests (RF), and Deep neural networks (DNN) are some of the AI models that are trained and tested for fault classification. The results show that DNN methods can correctly identify different types and levels of faults in bevel gears with a high level of recall and precision. Additionally, the suggested method is strong enough to handle complex and noisy vibration data, making it more accurate and time-saving than current diagnostic methods. This research enhances condition monitoring and predictive maintenance by providing an automated fault detection framework for bevel gears, improving the reliability and operational efficiency of industrial systems.

Keywords: *Bevel gears, Monitoring conditions, Vibration analysis, Artificial Intelligence, Diagnosis and prognosis*

✉ *Corresponding Author Email* : *t.khoualdia@univ-soukahras.dz*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No: 54

**Analysis and Numerical Simulation of a 316L Stainless Steel
Femoral Plate**

**Lazhar BAROURA¹, Abdelyamine BOUKHOBZA ², Kamel FEDAOUI³, Lahcen
MEBARKI ⁴, Amira ABOUSSALIH ¹**

*1University of Constantine 1, Institute of Applied Science and Technology, Department of Mechanics,
Algeria,*

2Department of Natural Sciences and Life, University Center of Elbayadh 32000, Algeria,

*3 Higher National School of Renewable Energy, Environment & Sustainable Development (RE2SD),
Algeria,*

4Mechanics Research Center (CRM), Constantine, Algeria

ABSTRACT

Stainless steel 316L is one of the most commonly used metals for manufacturing medical devices, including orthopedic, intravascular, and dental applications. The continuous development of high-performance biomaterials and the rapid advancement of manufacturing and quality control techniques require the training of highly skilled specialists capable of understanding biomaterials and mastering the latest analysis methods. This study aims to characterize a previously implanted 316L femoral plate that fractured approximately six months after implantation. Physicochemical tests indicate that the plate does not meet the required standards, using the ASTM standard as a reference. Numerical modeling suggests that the femoral plate fracture could not have occurred due to external loading or fatigue stress.

Keywords: *Physicochemical characterization, Stainless steel 316L, Biomaterials, Numerical modeling.*

✉ *Corresponding Author Email: barouralaz@yahoo.fr*

Abs. No: 55

Stepped Double-Slope Solar Still: Comparative Study between Analytical Simulation and Experimental Validation

Brahim DENNAI^{1✉}, Ahmed LAIDI², Boumediene TOUATI³

¹ Tahri Mohammed Bechar University, Science Exact Faculty, SM Departement, Bechar - ALGERIA

² Tahri Mohammed Bechar University, Technology Faculty, GM Departement, Bechar – ALGERIA

³ Tahri Mohammed Bechar University, Science Exact Faculty, SM Departement, Bechar - ALGERIA

^{1, 2, 3} Laboratory of Energetics on arid area , Kénadsa street, PO BOX: 417, 08000 Bechar, Algeria

ABSTRACT

This study presents the development of a mathematical model for the Stepped Double Slope Solar Still (SDSSS) to estimate the theoretical hourly distillate output. Energy balance equations for the various components of the SDSSS (Fig.1), were formulated and numerically solved using the Matlab/Simulink dynamic simulation software. The main objective is to validate the model by comparing the simulated hourly distillate yield with experimental data reported by S.W. Sharshir et al. The results show a strong correlation between numerical predictions and experimental measurements conducted in Kafr-el-sheikh, Egypt (latitude 31.07° N, longitude 30.57° E) during operating hours from 9:00 AM to 5:00 PM in April and May 2018. The deviation between theoretical and experimental results ranges from 5% to 8%.

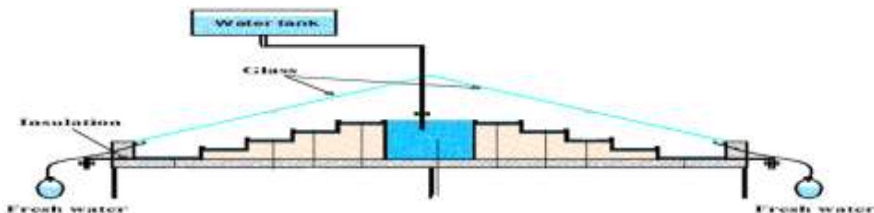


Fig.1. Schematic of stepped double slope solar still.

Keywords: Solar still, Numerical solution, Matlab/Simulink, hourly distillate, Solar radiation, Experimental validation.

✉ Corresponding Author Email : dennai.brahim@univ-bechar.dz

Abs. No: 58

Study of the probiotic potential and anti-Staphylococcus aureus power of Lactobacillus strains

Samia Hamma-Faradji^{1✉}, Lylia Ouarabi¹, Amel Ait Meddour ^{1,2}, Ghania Zidi¹, Liza Ouarabi¹, wissam Hafir¹, Sylia Terki¹, Samia Benfattoum¹, Rachid adjebli¹

¹ *Université de Bejaia, Faculté des Sciences de la Nature et de la Vie, Laboratoire de Microbiologie Appliquée, 06000 Bejaia, Algeria.*

ABSTRACT

Thirty lactic acid bacteria (LAB) strains were isolated from Algerian fermented milk. The initial screening showed that ten strains out of twenty-one were tolerance to acid pH and bile salts and were furthermore identified as *Lactiplantibacillus plantarum* (L. plantarum) strains by 16S rDNA sequencing. The identified strains were then characterised for their surface properties such as self-aggregation, hydrophobicity and biofilm formation. only 5 strains were selected for further analysis. These five strains, named L. plantarum 1, 2, 3, 4 and 5, were found to be safe and able to adhere to human epithelial colorectal adenocarcinoma Caco-2 cells. In particular, all these strains were active against *Staphylococcus aureus* ATCC 6538. In this study, isolation of strains of *S. aureus* is made from 60 samples of artisanal fermented milk « L' ben » harvested from 20 farms in Bejaia. Phenotypic and biochemical identification was performed. In order to select strains of *S. aureus* antibiotic-resistant's, an antibiotic susceptibility testing of cefotaxime and ceftazidime was performed and an analysis resistance phenotypes . The analysis of the resistance phenotypes revealed the production of CTX-M-15 β -lactamases in 5 strains. The study of the antibacterial activity revealed zones of inhibitions which vary between 15 and 35 mm. These results delineate the different beneficial functions of these L. plantarum strains from Algerian traditional fermented milk and consider them potentially usable as probiotics and biopreservative agents.

Keywords: *potentiel probiotic, antimicrobial activity , Staphylococcus aureus.*

✉ *Corresponding Author Email* : *samia.hamma@univ-bejaia.dz*

Abs. No: 59

Finite Element Analysis of Elasto-plastic Material Model for Cardiovascular Stent

Hamza BENNACEUR^{1✉}, Hacene AMEDDAH²

1Laboratory of Structural Mechanics and Materials, Batna 2 University,

Mechanical engineering Department, Batna-ALGERIA

*2Laboratory of Innovation in Construction, Eco-design, and Seismic Engineering (LICEGS), Batna 2
University,*

Mechanical engineering Department, Batna-ALGERIA

ABSTRACT

One of the most prevalent health problems is coronary artery disease which may cause pain and heart attack. Stent implantation is a non-surgical method to treat the coronary artery disease that can support arterial walls and reduce the risk of heart attack. The study of the stresses encountered by a cardiovascular stent is particularly complex due to its highly nonlinear response. During the balloon expansion phase, it is common for the stent's diameter to increase by more than three times. Due to its design, the implant undergoes significant plastic deformation, preventing it from returning to its original shape after the balloon is deployed. Since the deployment stresses are in the plastic range, the implant does not undergo elastic recovery but keeps the artery open in an expanded state. The main aim of the present work consisted of the complete simulation of the stent's behavior in a finite element analysis carried out using the Abaqus software. Contact devices were inserted between the balloon and the implant. The balloon was inflated to force the implant to have a diameter slightly larger than that of the artery. Then, the balloon was deflated and the plastically deformed implant continued to keep the artery open. Subsequently, a pulsatile blood pressure was applied to the artery to assess the history of the stresses endured by the implant. It is concluded that the stent underwent significant deformation due to bending. The stent was compressed to a diameter of only 1.25 mm during the complete crimping process. Following the crimping process, the stresses were highly concentrated in the U-bend areas. The von Mises stress peaked in the stent.

Keywords: *Coronary Stent; Balloon; Atherosclerosis; Plaque and vessel; Finite element method; Nonlinearity*

[✉]Corresponding Author Email : *h.bennaceur@univ-batna2.dz*

Abs. No: 61

Study of Nano-Biomaterials for Bone Regeneration by TPMS Lattice Structure

Hacene AMEDDAH^{1✉}

¹ *University Batna2, Faculty of Technology, Department of Mechanical Engineering, Batna, Algeria.
Laboratoire d'Innovation en Construction, Eco-Conception et génie Sismique (LICEGS)*

ABSTRACT

Bone regeneration is a major challenge in surgery. Current grafting techniques, although widely used, have their limitations: limited availability of grafts, risks associated with surgery, and sometimes insufficient quality of reconstituted tissue. Tissue engineering, an innovative approach, offers new prospects by combining cells, biomaterials and biological signals to stimulate bone regeneration. However, many challenges remain: the design of biocompatible materials that promote bone growth. The aim of this study is to develop a new therapeutic approach based on the design of new biomimetic materials capable of mimicking the extracellular matrix of bone to enhance bone regeneration. The TPMS method is used to manufacture scaffolds for tissue engineering based on mathematical equations, 3D printed with interconnected pores and appropriate biomorphic surfaces. The material chosen for the bone, LithaCon ATZ 980, an alumina-hardened zirconia supplied by Lithoz with Young's Young of 220 GPa and a theoretical density of 5.48 g/cm³, a compressive strength of 2200 MPa and a Poisson's ratio of 0.27. The numerical development is using Ansys workbench for lattice configuration and meshing, this design undergoes a comprehensive stress analysis using finite element analysis (FEA). The scaffolds exhibited comparable stiffness and tensile strength to cortical bone, mitigating the risk of failure and suggesting their suitability for bone replacement.

Keywords: *Bone regeneration, bone defects, biomimetic materials, bioceramics, TPMS*

✉ *Corresponding Author Email: h.ameddah@univ-batna2.dz*

Abs. No: 64

***Research on the novel quantum phenomena in infinite-layer
nickelate unconventional superconducting films***

**Qiang Zhao¹, Ting-Na Shao^{1,2}, Rui Liu¹, Zhi-Ping Yin^{1,3}, Shi-Jie Yang^{1,3}, Jia-Cai
Nie^{1,3}**

¹ School of Physics and Astronomy, Beijing Normal University, Beijing 100875, People's Republic of China,

² Institute of System Engineering, AMS, PLA, Beijing 100020, People's Republic of China,

³ Key Laboratory of Multiscale Spin Physics, Ministry of Education, Beijing Normal University, Beijing 100875, People's Republic of China

ABSTRACT

The unconventional superconductivity in infinite-layer nickelates (ILN) resembles cuprate superconductors and have generated great research interest recently. However, due to its complex electronic correlations and distinct unconventional superconducting properties, many scientific questions remain unresolved. In this report, spontaneous rotational symmetry breaking (RSB), a hallmark phenomenon in cuprate and iron-based high-temperature superconductors, is discovered in the normal state of $\text{La}_{1-x}\text{Sr}_x\text{NiO}_2$. Although ILNs share similar crystalline structure and the same nominal 3d-electron configurations with cuprates, they have significant differences in Fermi surface topology, electronic band characteristics, charge order, etc. These distinctions make ILN an ideal platform for studying RSB in unconventional superconductors. Through angular-resolved resistivity measurements within a large temperature and doping range, we identify pronounced RSB signatures near doping concentrations $x=0.05$ and 0.25 . Based on the strongly correlated electronic structures from the combined density functional theory and dynamical mean field theory calculations, we find that the calculated electronic susceptibility has a peak structure at the corresponding doping concentration, indicating pronounced electronic instabilities which drive RSB. Detailed analysis of the electronic susceptibility demonstrates that the van Hove singularity at the Fermi level significantly contributes to the electronic instability at $x=0.05$. Our findings reveal the important role of electronic correlation, van Hove singularity, and Fermi surface nesting in the emergence of RSB. In addition, we will also report the recent discovery of isotropic quantum Griffiths singularity in ILN superconducting thin films.

Keywords: *Infinite-layer nickelates, Unconventional superconductivity, Spontaneous rotational symmetry breaking, Electronic instability*

✉ Corresponding Author Email: jcnie@bnu.edu.cn

Abs. No: 68

CTX-M-15 ESBL-Producing *E. coli* Isolated from Pigeons in Bejaia, Algeria

**GHAROUT-SAIT Alima¹, SAIT-DI Sabrina², MENDIL Ouidad¹, MEHIDI Imene¹,
MANSEUR Lyticia¹, BELLIL Dassine¹, DJOUDI Ferhat¹**

1. Université de Bejaia, Faculté des Sciences de la Nature et de la Vie, Laboratoire d'Ecologie Microbienne, 06000 Bejaia, Algérie.

2. Université de Bejaia, Faculté des Sciences de la Nature et de la Vie, Laboratoire Biomathématiques Biophysique Biochimie et de Scientométrie, 06000 Bejaia, Algérie.

ABSTRACT

This study investigates antimicrobial resistance profiles and genetic determinants of extended-spectrum β -lactamase (ESBL)-producing Enterobacterales isolated from pigeon droppings in Bejaia, Algeria, in 2016. Among 200 Enterobacterales isolates analyzed, six multidrug-resistant (MDR) *E. coli* strains were identified using MALDI-TOF mass spectrometry. Antibiotic susceptibility testing revealed resistance to β -lactams, fluoroquinolones, and tetracyclines, with retained susceptibility to carbapenems, colistin, and fosfomycin. PCR screening detected the blaCTX-M-15 ESBL gene in all isolates, associated with the aac(6')-Ib-cr variant, which confers resistance to aminoglycosides and quinolones. No mcr-1, qnr, or SHV/TEM genes were identified. Phylogenetic analysis classified all isolates into phylogroup D, indicating clonal dissemination of high-risk strains within the local pigeon population.

These findings highlight urban pigeons as reservoirs of MDR *E. coli* in Algeria and emphasize the urgent need for enhanced surveillance of ESBL epidemiology and resistance mechanisms in both environmental and clinical settings.

Keywords: Antimicrobial resistance, *E. coli*, CTX-M-15, phylogroup D, urban pigeons, Algeria.

✉ Corresponding Author Email : alima.sait@univ-bejaia.dz

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No: 69

**Modeling and Experimental Analysis of Drying Parameters
Affecting Pistacia Atlantica Leaf Preservation**

**Asma ABDENBI ^{1✉}, Habiba Berbaoui ², Amel Saad², Abdelhadi SEGHIR², and
Boumediene TOUATI³**

¹ *Tahri Mohammed Bechar University, Natural Science and Life Faculty, Biology Departement,
Bechar - ALGERIA*

² *Tahri Mohammed Bechar University, Technology Faculty, GM Departement, Bechar – ALGERIA*

³ *Tahri Mohammed Bechar University, Science Exact Faculty, SM Departement, Bechar - ALGERIA*
1, 2, 3 Laboratory of Energetics on arid area , Kénadsa street, PO BOX: 417, 08000 Bechar, Algeria

ABSTRACT

This Drying is defined as a reduction in the moisture content of food material to increase the solid concentration, thereby reducing the possibilities of degradation of various origins (microbial, enzymatic, lipid oxidation, chemical reactions, etc.), while preserving the physical and chemical characteristics as much as possible. The Atlas pistachio tree (*Pistacia atlantica*) used in this study is located in southwestern Algeria (Bechar). The gas used in the convective dryer is hot air, whose thermodynamic properties allow it to be both a cooling fluid and a vector for removing evaporated water. In this drying, convection is the major transfer mode; Many empirical mathematical models have been developed to account for the kinetics of thin-layer drying of plant products. The results obtained show that the Midilli-Kucuk model describes well all the experimental points of *Pistacia atlantica* drying. Drying time depends on several factors including: initial moisture content of the product, drying temperature and drying air flow.

Keywords: *Pistacia atlantica, convection drying, modelling, drying time.*

✉ Corresponding Author Email : abdenabi.asma@univ-bechar.dz

Androgen Receptor (AR) Mutations and Prostate Cancer Risk in the Jordanian Population.

Mazhar Al Zoubi^{1✉}

¹ Yarmouk University, Department of Basic Medical Sciences, Faculty of Science, Irbid-Jordan

Abstract

Background: Prostate cancer is a complex condition in which both genetic and environmental factors contribute to the tumor initiation and progression in a manner not fully explained or discovered till today. Many factors that may increase the risk of prostate cancer include older age, family history and race. Genetics also may affect the risks if it is associated with race, family, or environmental conditions like radiation or toxic materials. Androgen receptor is an important transcription factor that is highly related to the development of different diseases and cancers. In this study, we aimed to investigate the role of androgen receptor (AR) mutations in prostate cancer risk in the Jordanian population. We targeted exon 3 and exon 8 with the highest possibility of being mutated.

Materials and Methods: Genomic DNA was extracted from one hundred prostate cancer tissues that are already archived in Formalin-Fixed Paraffin-Embedded (FFPE) tissues. After extraction of the DNA from targeted samples we performed Polymerase Chain Reaction (PCR) followed by DNA sequencing to detect any genetic variation.

Results: We reported thirteen mutations from all samples. They were distributed in the following order: ten mutations in exon three and two mutations in exon eight and one intron mutation. Five mutations were already reported in NCBI and eight were yet to be reported.

Conclusion: In conclusion, the current study reported a high frequency of AR mutations in prostate cancer patients in the Jordanian population. Conduction of functional studies of each mutation will reveal the exact mechanism of the role of the detected mutations in the development of prostate cancer.

Keywords: Cancer, Prostate cancer, Androgen receptor, Androgens, Mutation

✉ Corresponding Author Email: mszoubi@yu.edu.jo

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No: 77

**Formulation of a Cosmetic Cream with Anti-Inflammatory
Effect Based on Medicinal Plants**

**Sabrina SAIT-DIB ^{1✉}, Rima Tafoukt-Mezzai ², Alima GHAROUT-SAIT ³, Meriem
Adouane ⁴, Lila BOULEKBACHE-MAKHLOUF ⁵**

*1 University of Bejaia, Common core Department, Faculty of Natural and Life Science, Bejaia
06000- Algeria*

*2,3 University of Bejaia, Microbiology Department, Faculty of Natural and Life Science, Bejaia
06000- Algeria*

*4 University of Bouira, Food science Department, Faculty of Natural and Life Earth Sciences, Bouira
010000-Algeria*

*5 University of Bejaia, Food science Department, Faculty of Natural and Life Science, Bejaia 06000-
Algeria*

ABSTRACT

Equisetum arvense, a medicinal plant known for its anti-inflammatory, antioxidant, and healing properties, represents a promising ingredient for the formulation of cosmetic products. In a context where consumers are seeking natural and effective solutions for skin care, the objective of this study is to formulate a cosmetic cream with anti-inflammatory effects using an extract of horsetail (Equisetum arvense) and to evaluate its efficacy and stability. The horsetail extract was chosen for its active compounds, particularly flavonoids and silicates, which are known for their soothing and regenerative properties.

The extract was obtained through hydroalcoholic maceration of the aerial parts of the plant. The cosmetic cream was formulated by incorporating this extract into an oil-in-water emulsified base containing emulsifiers, hydrating agents (glycerin), and preservatives. The anti-inflammatory effect was evaluated in vitro by measuring the inhibition of pro inflammatory cytokine production in skin cells stimulated by an irritant agent.

The formulated cream demonstrated excellent physical stability, with no phase separation or texture alteration after stability testing. In vitro tests revealed a significant reduction in the production of pro-inflammatory cytokines in the presence of the horsetail extract, confirming its anti-inflammatory potential. The cream also showed good skin tolerance during preliminary tests on volunteers.

This study successfully formulated a stable and effective cosmetic cream based on horsetail extract, exhibiting significant anti-inflammatory properties. The results suggest that this cream could serve as a natural alternative for the care of sensitive or irritated skin.

Keywords: *Equisetum arvense, Cosmetic cream, Silicates, Flavon.*

✉ Corresponding Author Email: sabrina.sait@univ-bejaia.dz

The two-stage (630 and 600 Ma) emplacement of the Amsel post-collisional Pan-African high-K calc-alkaline batholith, Hoggar, Algeria

Sabiha TALMAT^{1✉}, Olivier BRUGIER², Jean-Paul LIÉGEOIS^{3†} Aziouz OUBADI^{4†}

¹*Laboratory of Animal Ecobiology (LEBA), Higher Normal School of Kouba Echeikh Mohamed
Elbachir Elibrahimi. DZ-16308 Vieux-Kouba (Algiers, Algeria)*

²*Géosciences, Université de Montpellier II, F-34095 Montpellier, France.*

³*Royal Museum for Central Africa, B-3080 Tervuren, Belgium.*

⁴*LGGIP/FSTGAT, USTHB BP 32, El-Alia Bab-Ezzouar, Algiers, Algeria.*

^{3†} *Deceased January 2025*

^{4†} *Deceased August 2022*

ABSTRACT

In the Laouni terrane (LATEA metacraton of the Hoggar, Algeria), the Amsel batholith is exposed along the West-Tamanrasset mega-shear zone (WTSZ). The batholith is composed of two magmatic suites: an early granitic suite (c. 630 Ma, zircon U-Pb age), and a late granodioritic suite (c. 600 Ma, zircon U-Pb age). The granitic suite is chemically homogeneous, whereas the granodioritic suite shows a great compositional diversity. The two suites have a similar composite source, but display distinct magmatic evolutionary trends attributed to different amounts of the mantle component. The geodynamic model includes two distinct episodes during the post-collision stage of the Pan-African orogeny in the Hoggar. During the first c. 630 Ma episode, the granitic suite was emplaced in a weakly transcurrent setting. The second episode, c. 600 Ma, was marked by a major transcurrent movements associated with the northern tectonic escape of the entire Tuareg Shield, including along the WTSZ, alongside which the granodioritic suite was emplaced. During both episodes, the same ancient continental source (Eburnean basement of the LATEA metacraton) was partially melted by the input of mantle-derived magma, represented by enclaves with depleted Nd and Sr isotopes. Minor mantle and preponderant crustal magmas mixed together to form the Amsel batholith. Mantle magma ascent was favoured by planar lithospheric delamination confined to the WTSZ, whereas the Eburnean basement of LATEA, far from the shear zones, was much less affected, a typical feature of metacratons.

Keywords: *shear zone, Hoggar, Amsel, Laouni terrane.*

✉ *Corresponding Author Email: sabihatalmat@gmail.com*

Damage Investigation and Finite Element Modeling of Sandwich Panels Subjected to Multiple Low-Energy Impacts

Krimo AZOUAOUI^{1✉}, Youcef HADJ MIHOUB SIDI MOUSSA¹, Said MOUHOUBI¹

¹ *Laboratoire de Mécanique Avancée, Université des Sciences et de la Technologie Houari Boumediene, Faculté de Génie Mécanique et Génie des Procédés, Algiers-ALGERIA*

ABSTRACT

This study investigates the damage mechanisms and finite element modeling of sandwich panels subjected to repeated low-energy impacts ranging from 2J to 4J. Experimental tests were performed on clamped specimens using a custom-built impact fatigue machine, with up to 60 impacts per specimen delivered by a hemispherical impactor. Damage progression was monitored through visual inspection and by measuring the diameter and depth of the resulting craters. Two distinct phases of crater growth were observed: an initial rapid increase followed by a more gradual development. A finite element model was developed in Abaqus using a predefined velocity field to simulate the multiple impact loading. The numerical results showed good correlation with the experimental data, with relative errors ranging from 9% to 16%. These findings confirm the capability of numerical simulations to predict damage evolution in sandwich panels under repeated impact conditions and support their use in the design and optimization of composite structures for impact resistance.

Keywords: *Aluminum-Aluminum Sandwich Structures, Honeycomb core, Low-Velocity Multiple Impacts, Damage Analysis, Finite Element Modeling.*

✉ *Corresponding Author Email* : krimo.azouaoui@usthb.edu.dz

Abs. No: 81

Integrating Genetic Algorithms and Decision Trees for Efficient Fault Diagnosis in Rotating Machinery

Abdelhamid MILOUDI[✉], Mohamed TAHI

*University of Science and Technology Houari Boumediene, Mechanical and Production Engineering
Department, Algiers-ALGERIA*

ABSTRACT

The study presents an expert system designed to diagnose faults in rotating machinery through the analysis of vibration signals. The methodology integrates statistical feature extraction, genetic algorithm-based feature selection, and decision tree classification to enhance diagnostic accuracy and interpretability.

Feature Extraction: Initially, six time-domain statistical indicators: Kurtosis, Crest Factor, Root Mean Square (RMS), Peak Value, Shape Factor, and Impulse Factor are extracted from vibration signals measured in acceleration, velocity, and displacement. This comprehensive feature set captures various aspects of the machinery's operational state.

Feature Selection: To manage the high dimensionality and focus on the most informative features, a genetic algorithm-based wrapper method is employed. This approach identifies an optimal subset of features that significantly contribute to fault classification, thereby reducing computational complexity and enhancing the classifier's performance.

Classification: A decision tree classifier is constructed using the selected features. Decision trees are chosen for their ability to generate interpretable rules, facilitating understanding of the fault diagnosis process. The classifier is trained to distinguish between different fault conditions based on the refined feature set.

Experimental Validation: The methodology is validated on an experimental test bench simulating five operating states: normal condition, misalignment, bearing defects, unbalance, and a combination of bearing defects and unbalance. Vibration data collected under these conditions are processed through the feature extraction and selection pipeline, followed by classification using the decision tree model. The results demonstrate the system's capability to accurately identify and classify the different fault states.

In summary, the integration of genetic algorithm-based feature selection with decision tree classification offers a balanced approach to fault diagnosis in rotating machinery, combining computational efficiency with high diagnostic accuracy.

Keywords: *Genetic wrapper, Bearing faults, Decision tree, Feature selection*

[✉] Corresponding Author Email

: abdelhamid.miloudi@usthb.edu.dz

Abs. No: 83

Finding the Best Crimping Conditions for Metal Cans through Experimental Testing

Ahmed BOUSSAHA^{1✉}, Rafik MAKHLOUFI²

1Laboratory of Structural Mechanics and Materials, Batna 2 University,

Mechanical engineering Department, Batna-ALGERIA

*2Laboratory of Innovation in Construction, Eco-design, and Seismic Engineering (LICEGS), Batna 2
University,*

Mechanical engineering Department, Batna-ALGERIA

ABSTRACT

There are two more difficult and important issues to consider in the manufacturing and development of metal packaging :

1. What are the acceptable dimensions that can be achieved when crimping a metal can to ensure crimp reliability?
2. What are the criteria for quality control (acceptance/rejection) and how is this control carried out ?

In this study, dedicated to metal cans for chemical products (paints and derivatives) and food and agricultural products, produced and marketed by the Benpack Unit for Metal Packaging, located in Fesdis, Batna, we wanted to experimentally determine the parameters related to the crimping machine and the components of the metal can (body, base and lid) in order to obtain a hermetic seal in both directions.

There are three different aspects to the technique used to evaluate a setting, all of which provide comprehensive information, both qualitatively and quantitatively:

- a. Visual inspection and external measurements provide an initial indication of the effectiveness of the weld;
- b. Stripping the joint to evaluate its clamp characteristics, i.e., evaluating the clamp ratio and examining the clamp footprint;
- c. Cross-section of the weld to measure the actual cross section at the point of cut (optical methods).

This experimental work is based on the study of the seaming of metal cans, defined as the folding together of the edge of the can to be seamed and the hem of the lid/bottom, then pressing them firmly together. The seam must be hermetic, i.e. it must prevent infiltration and leakage.

The objective is therefore to experimentally determine the parameters of the machine (seamer) and the parameters of the can components (body, base, lid) that will allow the specific dimensions of a seam to be determined that will guarantee the reliability of the package.

Keywords: *Crimping; Metal cans; Tinplate, Overlap; Body hooks, Bottom hooks*

✉ Corresponding Author Email : a.boussaha@univ-batna2.dz

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No: 84

***An Embedded Framework for Smart Cloud Architecture
Enabling Adaptive Business-Driven Solutions***

**Thagirarani MUNIANDY¹, Che Zalina ZULKIFLI^{1✉}, Fazilat KODIROVA², Nor
Asiah RAZAK¹, Okta NURIKA¹, Jakhongir SHOMUTALOV³, Mad Helmi AB.
MAJID¹, Zunnunova Umilda GULOMOVNA⁴**

¹*Centre of Embedded Education Green Technology, Faculty of Computing and Meta-Technology,
Universiti Pendidikan Sultan Idris, Tanjung Malim-MALAYSIA,*

²*Agency for Innovative Development, Ministry of Higher Education, Tashkent-UZBEKISTAN,*

³*Fund for Financing Science and Innovation Support Under the Ministry of Higher Education,
Science and Innovations of The Republic of Uzbekistan,*

⁴*Informatics and management department, National Institute of Fine Art and Design*

ABSTRACT

The digital transformation of Small and Medium-sized Enterprises (SMEs) is often hindered by several challenges, such as limited financial resources, fragmented data management practices, and insufficient technical expertise. Although these challenges are well-documented, this research focuses on addressing the specific gap in data management by developing a Smart Data Centre Framework aimed at supporting SMEs to be competitive in business. To achieve this goal, the study employs the Design Science Research (DSR) methodology, which provides a systematic approach for the development and evaluation of the proposed framework. The research begins with an investigation of existing data acquisition and integration practices within SMEs. Based on the insights gained, a scalable and cost-effective architectural model is proposed, and its potential to improve operational efficiency and data-driven decision-making is assessed. As part of the design process, a detailed storyboard consisting of 18 scenes was developed to illustrate the flow of data and user interaction across the various layers of the system. The architecture is structured around three key layers: the Data Acquisition Layer, utilizing Node-RED for real-time data collection; the Data Transformation Layer, which uses Python to clean and integrate the data; and the Visualization Layer, which employs Power BI for dynamic dashboards and analytics. Additionally, the system incorporates MySQL for centralized data storage, while the SME Smart Hub (SMESH), a cloud-based platform, facilitates the registration of a group of SMEs, offering scalability and flexibility and its management. The system architecture has been fully designed and is currently being implemented. Ultimately, this research contributes to the digital transformation of SMEs by providing a practical, storyboard-based framework that enhances data management, thereby improving SMEs' competitiveness and long-term sustainability.

Keywords: *Smart Data Center, Small and Medium-sized Enterprises (SMEs), Digital Transformation, Data Management*

✉ *Corresponding Author Email* : *chezalina@meta.upsi.edu.my*

Abs. No: 87

Impact of Scan Rates on the Redox Behavior of Paracetamol at NiO/GrE

**Moussaoui Saida^{1,2}, Smaili Fatiha^{2,3}, Berrabah Salah Eddine², Kaizra Salima^{2,4},
Bouchemal Hassiba^{2,5}**

¹Laboratory of Applied Chemistry and Materials, Department of Chemistry, Faculty of Sciences,
U.M.B.B., Boumerdes 35000, Algeria.

²Laboratory of Electrochemistry-Corrosion, Metallurgy and Inorganic Chemistry, Faculty of
Chemistry, U.S.T.H.B., BP 32 El-Alia, Algiers 16111, Algeria.

³Faculty of Sciences, University of Saad Dahlab Blida 1, Blida, Algeria.

⁴Laboratory of N-body & Structure of Matter, Department of Physical Sciences, ENS-
Kouba, Kouba, BP 92 Algiers, 16308 Algeria.

⁵Department of Process Engineering, Faculty of Hydrocarbons and Chemistry, U.M.B.B., Boumerdes
35000, Algeria.

ABSTRACT

Paracetamol (acetaminophen, N-acetyl p-aminophenol) is a commonly used antipyretic and analgesic drug, effective in reducing fever, and various types of pain, such as muscle aches, chronic pain, migraines, backaches, and toothaches. A nickel oxide-based electrochemical sensor NiO/GrE has been proposed for the efficient detection of paracetamol. The initial stage of this work involves the electrochemical deposition of a metallic nickel film on a graphite electrode at a potential of -1.05 V vs. SCE for 120 seconds via chronoamperometry. Subsequently, the metallic nickel layer is transformed into nickel oxide (NiO) in an alkaline medium. In the next step, the oxide film surface is analyzed using electrochemical and physico-chemical techniques. The electrochemical behavior of paracetamol on the NiO/GrE and a bare GrE was studied, using cyclic voltammetry in a buffer solution (pH=7) at a scan rate of 50 mV/s. Additionally, the influence of different scan rates on the redox behavior of paracetamol at NiO/GrE was analyzed. The modified electrode exhibited a significant improvement in electrocatalytic activity for paracetamol oxidation compared to the bare graphite electrode. The paracetamol exhibited a pair of well-defined redox waves on the modified graphite electrode, with anodic peak potential (E_{pa}) at 0,367 V and cathodic peak potential (E_{pc}) at 0,312 V. The redox peak currents at the modified graphite electrode in the paracetamol solution increased linearly with the scan rate in the range from 25 to 200 mV/s. This behavior indicates that the reaction at the modified electrode involving paracetamol is a surface-confined process.

Keywords: Anodic oxidation, Cyclic Voltammetry, paracetamol.

✉ Corresponding Author Email : sa.moussaoui@univ-boumerdes.dz

12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)

17-20 October 2025, ANTALYA -TURKEY

Abs. No: 102

**Assessment of the biochemical attributes of C₄
photosynthesis in *Boerhavia* (Nyctaginaceae), a proposed
model of C₄ subtypes metabolic cooperatio**

**Riyadh Muhaidat^{1✉}, Mazhar Al Zoubi², Muath Al-Qudah¹, Mohammad Oqlat³,
Athena McKown⁴, Rana Al-Kfoof¹, Khaldoun J. Al-Hadid⁵**

¹ Department of Biological Sciences, Faculty of Science, Yarmouk University, Irbid P. O. Box 21163,
Jordan

² Department of Basic Sciences, Faculty of Medicine, Yarmouk University, Irbid P. O. Box 21163,
Jordan

³ Biomedical Research Centre, School of Science, Engineering and Environment, University
of Salford, Salford, M5 4WT, UK

⁴ Department of Forest and Conservation Sciences, Faculty of Forestry, University of British
Columbia, Forest Sciences Centre, 2424 Main Mall, Vancouver, BC V6T 1Z4, Canada

¹ Department of Biological Sciences, Faculty of Science, Yarmouk University, Irbid P. O. Box 21163,
Jordan

⁵ Department of Biological Sciences, School of Science, Hamdi Mango Research Center for Scientific
Research, The University of Jordan, 11942 Amman, Jordan

ABSTRACT

Plants using the C₄ photosynthetic pathway are classed into three main biochemical subtypes based on the major CO₂-concentrating decarboxylase around Rubisco (NADP-ME; NAD-ME; PEP-CK). All three subtypes exist within the grass family, whereas only NADP-ME and NAD-ME subtypes have been found in 16 C₄-inclusive eudicot families. Debate exists over the occurrence or contribution of PEP-CK to carbon fixation in C₄ eudicots, with controversial reports available in the literature. In our study, we address this debate through critical reassessment of the Kranz anatomical and C₄ biochemical attributes in two *Boerhavia* species (*B. coccinea* and *B. dominii*) in the Nyctaginaceae. Both are classed as NADP-ME but also previously reported to exhibit considerable PEP-CK activity. Using light and electron microscopy, leaves of both *Boerhavia* C₄ species possess the atriplicoid kranz anatomy type with centripetally-positioned chloroplasts in the bundle sheath cells. Ultrastructural analysis revealed properties of the NADP-ME subtype, with grana-deficient bundle sheath chloroplasts and mesophyll chloroplasts possessing prominent grana. Using activity assays, localization and western blotting of key C₄ enzymes, we found that while NADP-ME activity was the highest, both *Boerhavia* species demonstrated substantial PEP-CK activity, and consistently dense and specific immunolocalization of PEP-CK in the bundle sheath cells. There were also evident immunoreactive bands to PEP-CK and NAD-ME on immunoblots. In conclusion, our findings provide robust evidence corroborating PEP-CK occurrence and functioning in NADP-ME *Boerhavia* species and thereby rejecting the assumption of its absence or minimal contribution to carbon acquisition in C₄ eudicots lineages.

Keywords: atriplicoid kranz anatomy, granal development, NADP-ME subtype, NAD-ME subtype, PEP-CK subtype, enzyme activity, immunolocalization, western blotting, Nyctaginaceae

✉ Corresponding Author Email: muhaidat@yu.edu.jo

Abs. No: 103

Advancing High-Performance Solar Cells with Ca_3NCl_3 Perovskite A_3BX_3 -Type Absorbers for Next-Generation Photovoltaics

Hayat Arbouz[✉]

¹ *University Saad Dahlab Blida 1, Department of Physics, Blida-Algeria*

ABSTRACT

Calcium-based inorganic perovskites of the formula Ca_3BX_3 are emerging as promising, environmentally friendly candidates for photovoltaic applications, particularly as absorbers for single and tandem solar cell structures, due to their advantageous optoelectronic characteristics and thermodynamic stability. This study focuses on the numerical simulation and subsequent optimization of a photovoltaic cell whose absorber layer is the perovskite material Ca_3NCl_3 with a wide bandgap energy of 1.66 eV. A configured reference structure: ITO/SnS₂/ Ca_3NCl_3 /P3HT/Ag was used as a reference. A theoretical approach was carefully developed to evaluate critical device parameters such as power conversion efficiency (PCE), open-circuit voltage (V_{oc}), short-circuit current density (J_{sc}) and fill factor (FF). The variation of these parameters as a function of the intrinsic properties of the materials making up the absorber and the surrounding transport layers was evaluated according to the established simulation model. Analysis of the contours of key cell parameters under the action of combined physical parameters, as well as of the current-voltage characteristic curve, has enabled the evaluation of the performance of the basic structure, as well as structures based on numerous alternative carrier transport layer materials under different conditions, and to define an optimized structure that performs better (PCE = 22%) than the basic one (PCE = 18.5%) and that can serve as an adequate top sub-cell in a more elaborate tandem device capable of achieving conversion efficiencies of over 25% in different outdoor temperature conditions. The aim of this study is to develop stable, non-toxic, high-efficiency perovskite solar cells.

Keywords: *Solar Energy, Perovskite, Simulation, Inorganic*

[✉] *Corresponding Author Email* : *arbouzhayet@yahoo.fr*

Abs. No: 105

Phase Pattern from Three Cylindrical Waves Using the Moiré Method

Burim KAMISHI✉

¹ *University of Prishtina, Department of Physics, Prishtina-KOSOVO*

ABSTRACT

In this paper, the moiré method is applied to obtain the equations of curves resulting from the interference of cylindrical waves by three transparent slits. In physics moiré patterns or moiré fringes are large-scale [interference patterns](#) that can be produced when a partially opaque [ruled pattern](#) with transparent gaps is overlaid on another similar pattern. For the moiré interference pattern to appear, the two patterns must not be completely identical, but rather displaced, rotated, or have slightly different pitch.

When a parallel beam of monochromatic light is incident perpendicularly on the surface of an opaque obstacle containing three very narrow and infinitely long transparent slits, generally placed at random in the plane of the obstacle, the phase pattern of the interference obtained is always formed by three systems of equilateral hyperbolas with their origins at the points of intersection of the projections of the rectilinear light sources. A detailed mathematical analysis of the problem is given. The computational results show that the semi-axes of the above mentioned systems of hyperbolas depend on the angle between the rectilinear sources and on their orientations. Graphical representation of four special cases is given as well. From this treatment it is seen that applying the moiré method of lines of the same phase in the plane of observation, is a very convenient and appropriate way to describe the theory of this type of interference.

Keywords: *Moiré fringes, Cylindrical waves, Phase pattern*

✉ **Burim Kamishi**

Email : burim.kamishi@uni-pr.edu

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No: 92

**Green corrosion inhibitors in the oil sector - Reality and
Prospects**

Mokhtar BENARIOUA^{1✉}, Nora Bouzeghaia¹, Imane ABDOU¹, Mahieddine NAOUN²

¹Laboratory of Structural Mechanics and Materials, Batna 2 University, Batna, Algeria.

²Mechanical Department, Faculty of Technology, Batna 2 University, Batna Algeria.

ABSTRACT

Corrosion inhibitors for oil fields are of great importance. They are used in several processes, including oil well stimulation and cleaning pipes, post flush treatment and corrosion prevention for transportation and storage management. Environmental protection and public health have recently emerged as critical chapter in global politics, which must be considered in all industrial processes. In line with this, some companies focuses on developing environmentally friendly solutions. However, despite substantial scientific research and great field findings, no completely green corrosion inhibitor has yet been developed. It is normal to

wonder why specialized companies in the field do not manufacture green corrosion inhibitors from plant, animal, or any other natural sources, as is done in other industrial sectors such as pharmaceuticals, cosmetics, and composite materials, and so on. Is it a scarcity of natural raw materials, a lack of information on scientific results achieved in the field, a lack of confidence in completed research, or manufacturing difficulties? In this study, we attempted to answer the posed concerns by studying the objective qualities of each element in order to provide a holistic viewpoint that may rejuvenate this essential industry while also including some useful and reliable research findings.

Keywords: *Green corrosion inhibitors, Oil well stimulation, oil fields*

✉ *Corresponding Author Email : m.benarioua@univ-batna2.dz*

Abs. No:109

**A Compact high isolation of MIMO UWB Antenna with
Band Notched Characteristics for WLAN Application.**

Faiza MOUHOUCHE^{1✉}, Kahina DJAFRI², Dehmas mokrane³

¹ *M'Hamed BOUGUARA University, Electronic.Department, Boumerdes-Algeria*

² *Institute of Electrical and Electronic Engineering(IGEE)*

ABSTRACT

This work presents a compact UWB MIMO antenna with band notch characteristics for WLAN application is designed and investigated. A single antenna comprises an inverted Christmas tree shaped patch fed by a 50 Ω Microstrip line and partial ground plane is designed for achieving UWB application.

The operating frequency of the proposed single antenna is 3.4–14.5 GHz with a return loss of less than 10 dB. Subsequently, a circular split ring shaped slot is implemented in the radiating element to optimize the antenna for WLAN band rejection at 5.6- 6.2GHz . Furthermore, a 2×1 MIMO antenna is designed by utilizing the polarization diversity technique. The two radiating elements are placed parallel and decoupling structure is placed

between them to improve the isolation performance. Finally, the compact UWB MIMO antenna prototype is designed on the FR4 substrate with the overall dimensions of $20 \times 39 \times 1.63$ mm³. The proposed UWB MIMO antenna design provides an impedance bandwidth ($S_{11} < -10$ dB) from (3.3-16 GHz) with band notch centered at 5.8 GHz. The isolation of the proposed MIMO antenna is higher than -15dB,. Results show that the proposed MIMO

antenna is a good candidate for handheld devices for wireless personal-area networks application.

Keywords: *MIMO, UWB antenna, high isolation, WLAN.*

[✉]*Corresponding Author Email*

:f.mouhouche @univ-boumerdes.dz

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:112

**The potential of information technology in construction
project management**

Nabi IBADOV¹✉, Gökhan ARSLAN²

1 Warsaw University of Technology, Faculty of Civil Engineering, Warsaw-POLAND

2 Istanbul Aydın University, Department of Civil Engineering, Istanbul - TÜRKİYE

ABSTRACT

In recent times, in the context of the increasing pace of social development, when constraints in the sphere of production in terms of time, resources and risk are becoming more and more stringent, knowledge and possibilities of using artificial intelligence in the management of a construction project (and in construction as a whole) are becoming increasingly important. In this context, the use of artificial intelligence solutions is becoming increasingly popular and extremely important for both individual entrepreneurs and organizations, because it supports in the area of design and allows for effective management of project portfolios, creating significant competitive advantages and shaping new market segments. Thanks to such innovative approaches, new technologies can improve work, reduce process costs, increase the safety of employees and building users, and protect the environment at every stage of the building's life cycle. The purpose of this article is to examine the possibilities of using artificial intelligence solutions (digital solutions) in the construction industry. To show to what extent artificial intelligence provides support in various construction tasks or activities. The article presents the benefits of using artificial intelligence in areas such as: design, planning, automation, resource optimization, risk management, etc. The article also shows what innovative approaches in construction fit into the context of ecological construction and environmental protection. In this context, it should be noted that the article also addresses the following topics: BIM technology, sustainable construction, virtual construction site, Internet of Things, intelligent construction, intelligent management.

Keywords: *Intelligent construction, Virtual construction site, Construction management*

✉ Corresponding Author Email : nabi.ibadov@pw.edu.pl

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:119

**Modeling Cyclonic Development on the Lee Side of West-
Southwest Kosovo**

Skender KABASHI^{1✉} and Ilir ISUFI²

¹ *University of Prishtina, Department of Physics, Eqrem Cabej Str. 51, 10000 Prishtina, Republic of Kosovo*

² *University of Prishtina, Department of Physics, Eqrem Cabej Str. 51, 10000 Prishtina, Republic of Kosovo*

ABSTRACT

This study investigates the formation of a mesoscale lee-side 'cyclone' in the western lee of the Kosova-Albanian mountain range. The primary objective is to analyze atmospheric circulation in the lower atmosphere, with a specific focus on the orographic influence near the border of Kosova, particularly in the Gjakova region.

Employing real-time synoptic data and model simulations at 0000, 0600, 1200, and 1800 UTC, this research evaluates the role of orography in inducing cyclonic circulations. The results indicate that lee-side cyclogenesis, driven by westerly and southwesterly flows over complex terrain, frequently leads to localized heavy precipitation. Comparison of model output from the Horace Met Office global model (42×42 km grid) with updated products reveals significant discrepancies in precipitation and satellite-derived infrared imagery.

These findings underscore the substantial impact of terrain on regional weather systems in the Western Balkans. Despite advancements in regional modeling, the absence of comprehensive synoptic observations since 1999 continues to impede forecast accuracy. Moreover, limited coordinated mesoscale research efforts highlight the necessity for enhanced observational networks and cross-border meteorological collaboration.

Keywords: *Cyclone , Modeling, Lee side, West-Southwest Kosovo*

✉ *Corresponding Author Email* : *skender.kabashi@uni-pr.edu*

Abs. No:107

Artificial Intelligence in Monitoring and Diagnostics in Civil Engineering

Anna JAKUBCZYK-GAŁCZYŃSKA[✉], Agata SIEMASZKO²

*¹Faculty of Civil and Environmental Engineering, Gdansk University of Technology Department,
Gdańsk-POLAND*

ABSTRACT

Modern civil engineering faces significant challenges related to monitoring and diagnosing the technical condition of buildings. In response to these challenges, artificial intelligence (AI) offers innovative solutions that can significantly enhance monitoring and diagnostic processes. Decision-making during the operational phase of buildings is complex, requiring extensive knowledge and adaptable models to evaluate management decisions. The absence of expert systems for operations and diagnostics can lead to incorrect decisions, negatively impacting both the facility owner and the environment.

This article proposes an interdisciplinary approach that combines building diagnostics with AI to develop rational operational guidelines. The importance of collaboration between civil engineers and AI specialists is emphasized to create effective and reliable solutions. The primary goal is to develop a proprietary diagnostic-decision system (D-DS) that integrates expert knowledge with available data, including historical and real-time monitoring data, to assess and manage building operations. Case studies are presented where AI enables early damage detection, failure prediction, and assessment of the technical condition of structures. Special attention is given to real-time monitoring systems that, thanks to AI, can provide accurate and rapid information about the state of buildings, thereby facilitating timely and informed decision-making.

The application of AI in building monitoring and diagnostics has the potential to significantly improve civil engineering practices, making processes more efficient, accurate, and economical. By leveraging advanced algorithms and machine learning techniques, AI can enhance the predictive maintenance and operational efficiency of building structures. Future research should focus on further developing these algorithms and exploring their practical applications across various construction scenarios to ensure robustness and scalability.

Keywords: *Civil engineering, Artificial Intelligence, Diagnostics*

[✉] *Corresponding Author Email: annjakub@pg.edu.pl*

Improved Shale Microcrack Prediction via Plasticity-Modified Model

Junfeng Zhu^{1✉}, Guangqing Zhang¹

¹ *China University of Petroleum-Beijing, College of Petroleum Engineering,
Beijing, China*

ABSTRACT

Shale micromechanical behavior critically impacts hydraulic fracturing efficiency. Traditional elastoplastic models show substantial discrepancies in characterizing microcrack propagation in clay/organic-rich shale because they overlook the complexities of plastic evolution. This research investigates the heterogeneous clustering mechanism of nanoindentation-induced cracks in C7 shale to clarify the controlling mechanisms of plastic deformation on microcrack propagation paths.

Nanoindentation experiments were performed to determine the elastic modulus, hardness, yield stress, and plastic deformation energy of constituent minerals. A modified yield function incorporating a damage variable was formulated based on plastic strain and stress state. The modified function was implemented within a finite element model for nanoindentation simulation. Validation of the enhancement in crack path prediction provided by the plasticity modification was achieved through comparison of simulated and experimental load-displacement curves and residual morphologies.

Numerical simulations reveal: (1) Conventional models underestimate the size of the crack-tip plastic zone by 18-22%; (2) The disparity in plastic deformation energy between quartz and clay minerals (0.15-0.35 MJ/m³) serves as the dominant controlling factor for crack bifurcation; (3) The likelihood of crack deflection increases by 34% when the mineral interface strength is >11 MPa. Experimental validation demonstrates that the modified elastoplastic model achieves significantly improved prediction accuracy for microcrack length.

This research confirms that ignoring plastic effects results in an overestimation of the brittle fracture propensity of C7 shale. The modified elastoplastic model enables more precise characterization of dynamic microcrack propagation behavior in clay-bearing shale. It offers a theoretical framework for advancing shale micromechanics research and optimizing hydraulic fracturing.

Keywords: *Elastoplasticity, Fracture mechanics, Nanoindentation,*

✉ Junfeng Zhu : zjf_cup@163.com

***Comparison of Intensity Modulated Radiotherapy and Proton
Therapy Treatment of Head and Neck Cancer***

Yllka KABASHI^{1,2}✉, Rozana BUCI³

1 University of Prishtina, Faculty of Electrical and Computer Engineering, Prishtina- KOSOVO

*2 Ss. Cyril and Methodius University, Faculty of Natural Sciences and Mathematics, Skopje-NORTH
MACEDONIA*

3 University Hospital Center "Mother Teresa "Tirana, ALBANIA

ABSTRACT

Head and neck cancers (HNCs) are among the most challenging malignancies to treat due to their proximity to critical structures. This study evaluates and compares Intensity-Modulated Radiotherapy (IMRT) and Proton Therapy (PT) in the treatment of head and neck cancer, utilizing the open-source treatment planning system MatRad. Twenty anonymized HNC patient CT datasets were used to generate treatment plans for both IMRT and PT, adhering to standard clinical dose constraints. Dose distributions, target coverage, and sparing of organs at risk (OARs) were analyzed quantitatively using dose-volume histograms (DVHs). The relative biological effectiveness (RBE) of protons was considered to assess potential therapeutic advantages. Results demonstrate the advantages and limitations of each modality, guiding clinicians in optimizing treatment plans.

Keywords: *Head& Neck cancer, Treatment planning, intensity-modulated radiotherapy, proton therapy*

✉ *Corresponding Author Email : yllka.kabashi@uni-pr.edu*

Abs. No:134

**DEVELOPMENT AND CHARACTERIZATION OF A
PVA-ZnO AND PVA- CHITOSAN-ZnO
NANOCOMPOSITE DRESSING WITH ANTIBACTERIAL
ACTIVITY.**

**Dr. GUERFI. Bahdja¹; BOUKHADRA. R¹; KHADER.N²; ZOUANI.A³;
HADHOUM. N⁴ HADJADJ AOUL.F.Z⁵.**

¹⁻ *Medicinal Chemistry Laboratory, Faculty of Medicine, University Saad Dahlab of Blida 1, BP 270 Soumaa, 09000, Blida, Algeria.*

²⁻ *Biophysics laboratory, Faculty of Medicine, University Saad Dahlab of Blida 1, BP 270 Soumaa, 09000, Blida, Algeria.*

³⁻ *Toxicology laboratory, Faculty of Medicine, University Saad Dahlab of Blida 1, BP 270 Soumaa, 09000, Blida, Algeria.*

⁴⁻ *Medicinal Chemistry Laboratory, Faculty of Medicine, University Mouloud mammeri – Tizi ouzou. Algeria.*

⁵⁻ *Medicinal Chemistry Laboratory, Faculty of Medicine, University Ben youcef Ben Khedda - Algiers. Algeria*

BACKGROUND :

PVA and chitosan as biomaterials have found various applications in the biomedical field especially in the management and care of wounds and burns. The main advantage of PVA and chitosan hydrogels is that they help to create a moist, cool environment for wound healing and provide high water vapour permeability while preventing the penetration of microbes into the wound. The aim of our present study is to produce hydrogels based on PVA and chitosan by chemical cross-linking and also to carry out the physico-chemical characterization of the films obtained.

METHODS :

In order to obtain a dressing with the best properties, two types of hydrogel dressings were prepared (PVA and PVA-chitosan) by chemical cross-linking using glutaraldehyde followed by in situ precipitation of zinc oxide nanoparticles in the hydrogel networks. The samples were characterised by infrared spectrometry, Raman spectroscopy and scanning electron microscopy(SEM). In addition, other properties including swelling and deflation rates, film

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

thickness and pH were also studied. The hydrogels prepared were tested for their antibacterial activity against Gram-negative and Gram-positive bacteria.

RESULTS :

FTIR analysis suggests that hydroxyl groups present in PVA interact electrostatically with zinc oxide nanoparticles during nanocomposite formation. SEM studies reveal that PVA-ZnO and PVA-Chitosan-ZnO nanocomposites exhibit a porous morphology with pore sizes ranging from 20 to 50 μm and a dense distribution compared to pure hydrogels without ZnO. The study of the antibacterial activity of the films prepared showed that these nanocomposites exhibited antibacterial activity against Gram + and Gram - bacteria and that this activity varied with the concentration of nanoparticles inside the matrix.

CONCLUSION :

The prepared hydrogels have proved applicable as robust wound dressings.

Keywords: *Dressing, hydrogel, PVA, chitosan, zinc oxide.*

✉ Corresponding Author Email : *bahdja.guerfi@gmail.com*

Integrating Digital Twins in Architecture, Engineering and Construction

Nabi IBADOV¹, Pawel NOWAK^{✉1}, Fabio PLANU², Fabiana RACO², Jerzy ROSŁON¹

¹ *Warsaw University of Technology, Civil Engineering Faculty, Warsaw, POLAND*

² *University of Ferrara, Department of Architecture, Ferrara, ITALY*

ABSTRACT

Digital Twin (DT) technologies are gaining growing attention within the Architecture, Engineering, and Construction (AEC) sector, both in academic research and professional practice. However, the widespread integration of DT solutions across the supply chain remains gradual and uneven. Key obstacles to adoption include identifying suitable technologies, clearly outlining their intended applications, and assessing the return on investment. The rise of the Fourth Industrial Revolution has driven the integration of Key Enabling Technologies (KETs), promoting the adoption of ICT-based approaches in design and project execution across multiple industries, including AEC. Broad implementation of DTs is expected to enhance operational efficiency, minimize recurring errors, and improve informed decision-making, especially in the context of risk management. Within Europe, the degree of digital advancement varies by country. Nonetheless, the predominance of small and medium-sized enterprises (SMEs) within national industries continues to pose a significant barrier to the full-scale deployment of DT solutions across the sector. Authors will tackle the following elements: system integration, data acquisition, automating processes, digital information and analysis, Digital Twin and building and construction life cycle, Digital Twin sustainability and Digital Twin societal impacts.

Keywords: *Digital Twin, AEC, ICT*

[✉] *Corresponding Author Email: pawel.nowak@pw.edu.pl*

Study on the discontinuous fracture process zone leading to multiple parallel fractures

Ruiheng JIN¹, Guangqing ZHANG^{2✉}

¹ *China University of Petroleum-Beijing, College of Petroleum Engineering, Beijing-CHINA*

ABSTRACT

Multiple parallel fractures were found to be induced during hydrofracturing treatment in the Hydraulic Fracturing Test Sit (HFTS). And the number of artificial fractures is much larger than the number of perforation clusters. The activation of the discontinuous fracture process zone (DFPZ) when the main fracture propagation is blocked may be the cause of this phenomenon. In addition, discontinuous fracture process zone (DFPZ) was observed at the fracture tip in laboratory. In order to study the influence mechanism of DFPZ on fracture propagation, the DFPZ is simulated by the weak surface formed by the embedded plastic sheet. And the process of DFPZ activation is simulated by conducting a three-point bending experiment again after adhering to the main fracture. The experiment results show that: (1) When the main fracture propagation is blocked, DFPZ induces the formation of secondary fractures. (2) When the new fracture is blocked, new DFPZ will be further generated, which will induce the formation of multiple parallel fractures in turn. (3) The activation and development of fractures by DFPZ is an important mechanism for the formation of multiple parallel fractures. In this study, the formation process and mechanism of multiple parallel fractures in field hydraulic fracturing are revealed. And it is of great significance for understanding the aggregation behavior of multiple fractures in hydraulic fracturing.

Keywords: *DFPZ, Multiple parallel fractures, three-point bending*

✉ *Corresponding Author Email* : *zhangguangqing@cup.edu.cn*

experimental Study on Fracture Morphology Evolution in Horizontal Well Refracturing Based on FBG Optical Fiber Monitoring

Yaoyang Li¹, Guangqing Zhang^{2✉}, Yansen Ling² Dingshan Cai²

¹ China University of Petroleum (Beijing), Department of Petroleum Engineering, College of Petroleum Engineering, Beijing- China,

² China University of Petroleum (Beijing), 2.Department of Mechanics, College of Petroleum Engineering, Beijing- China,

ABSTRACT

Refracturing in low-production oil wells is an effective method for enhancing hydrocarbon recovery. Understanding the evolution of fracture morphology during refracturing is essential for accurately evaluating well productivity, especially in reservoirs characterized by heterogeneous fluid distribution and complex inter-fracture stress interactions. In this study, a series of physical simulation experiments were conducted using a true triaxial hydraulic fracturing system combined with fiber Bragg grating (FBG) strain sensors. The experiments systematically investigated the effects of spacing between new and existing fractures, as well as formation energy supplementation on fracture propagation behavior. The results show that the spacing between pre-existing and newly initiated fractures is a key factor influencing fracture morphology during refracturing. When the spacing is small, newly formed fractures tend to propagate unevenly with significant branching, and the roughness of the fracture surfaces increases, hindering the transport of proppants. As the spacing increases, fracture propagation becomes more balanced and symmetric, with smoother surfaces, which is favorable for enhancing fracture-controlled reservoir volume. Appropriate levels of formation energy replenishment further facilitate the development of new fractures. However, excessively high energy replenishment, while promoting the formation of branch fractures, tends to suppress the extension of main fractures and reduce the effective contact area between the fractures and the reservoir, thereby impairing the overall refracturing effectiveness. These findings provide valuable insights for improving refracturing efficiency and optimizing fracturing design in low-productivity reservoirs.

Keywords: Refracturing, optical fiber, 3D scanning, rock mechanics

✉ Corresponding Author Email

: zhangguangqing@cup.edu.cn

Enhancement of the DC Output Voltage of a Multilevel Boost Converter Using LQR Control.

Abdesselam MEKROUD¹, Adel BOUCHAHED^{2,3}, Abdellah DRAIDI³, Mohamed ASSABAA^{3,4}, Salah HAMMOUDI¹, Abdelfettah BOUSSAID³

1Mechanical Department, Institute of Applied Sciences and Techniques, University of Constantine 1, Algeria

2Laboratoire Satellites Intelligence Artificielle Cryptographie et Internet des Objets, University Of Constantine 1, Algeria

3Electomechanical Department, Institute of Applied Sciences and Techniques, University of Constantine 1, Algeria

4Laboratoire de Traitement de Signal, Department of Electronics, University of Constantine 1, Algeria

ABSTRACT

In this work, the Linear Quadratic Regulator (LQR) control strategy is identified as the most effective solution for enabling the multilevel boost converter to deliver a stable DC output voltage. The DC-DC boost converter features, at its output stage, a series of capacitors generating potential differences between them; consequently, the overall voltage corresponds to the sum of the voltages across the three output capacitors. The objective is to enhance the transient and steady-state performance of voltages and currents in terms of oscillation, disturbance rejection, and stability. To achieve this, LQR control is applied to both the voltage and current control loops, with the Q and R matrices appropriately designed to compute the gain matrix. To ensure the stability of the overall DC voltage, the LQR controller is used to supply a three-phase voltage inverter. Furthermore, to minimize the voltage error between the boost converter and the inverter, a second voltage regulation loop based on a Proportional-Integral (PI) controller is implemented. This controller enables the supply of a 1 kW three-phase load without inducing disturbances or oscillations. Simulation results obtained in MATLAB highlight the robustness of the LQR control strategy and the effectiveness of the PI controller in regulating the DC voltage at the input of the three-phase inverter.

Keywords: *Three-level boost converter, LQR control, PI controller, Three-phase voltage inverter, Three-phase load.*

[✉]Corresponding Author Email : mekrouda@yahoo.fr

Impact of Traffic-Induced Vibrations on People in Buildings: A Neural Network Study

**Marta MIKIELEWICZ[✉], Anna JAKUBCZYK-GAŁCZYŃSKA², Robert
JANKOWSK¹³**

1Gdańsk University of Technology, Department of Building Engineering, Gdansk-POLAND

ABSTRACT

Urban agglomerations are constantly developing. New places to live, work and, consequently, new access roads are being built. Traffic causes vibrations that propagates through the ground. During urban planning and sustainable urban development, this important issue is unfortunately often overlooked. Cars passing by buildings may affect the structure and people in it. The results of previous research indicate that such vibrations can have bad effects on people's mental and physical health. The frequencies of vibrations felt by people inside buildings are between 1 Hz and 80 Hz. However, low frequencies from 1 Hz to about 25 Hz are the most dangerous, as vibrations with such frequencies may enter into resonance with human organs. If a person is exposed to them for a longer period of time, they can result in heart disorders, sleep disturbances, and bad mood. The purpose of this research is to study the effects of vibrations from motor vehicles on people in buildings in close proximity to the vibration source using neural network algorithms. The results clearly show that the use of machine learning algorithms gives reliable results. The algorithms are capable to speed up data analysis significantly and reduce the costs of the whole investigation.

Keywords: *Traffic-induced vibrations, perception on human, neural networks.*

[✉] *Corresponding Author Email : marta.mikielewicz@pg.edu.pl*

Abs. No:147

Geometry-Driven Optimization of Oil–Water Imbibition in Capillaries

**Shengting Zhang^{1,2}✉, Rodrigo C.V. Coelho^{2,3}, Jing Li¹, Qingyuan Zhu¹, Kelu Wu¹,
Zhangxin Chen¹**

*1 National Key Laboratory of Petroleum Resources and Engineering, China University of
Petroleum (Beijing), Beijing 102249, China*

*2 Centro de Física Teórica e Computacional, Faculdade de Ciências, Universidade de
Lisboa, 1749-016 Lisboa, Portugal*

*3 Centro Brasileiro de Pesquisas Físicas, Rua Xavier Sigaud 150, 22290-180 Rio de
Janeiro, Brazil*

ABSTRACT

This work presents a systematic optimization of oil–water imbibition dynamics in axisymmetric capillaries by tailoring the cross-sectional geometry to minimize total imbibition time and enhance velocity uniformity under fixed total volume and length constraints. The capillary profile is parameterized using a Fourier series, enabling smooth and flexible geometric variations. A modified Bell–Cameron–Lucas–Washburn model is developed, incorporating spatially varying radius, two-phase viscosity contrast, and inertial effects to describe imbibition dynamics accurately. The resulting nonlinear governing equations are solved numerically to predict the evolution of the imbibition front and flow velocity. An objective function that combines imbibition time, velocity uniformity penalty and regularization is optimized via a differential evolution algorithm to identify geometries that balance rapid transport with flow stability. Results show that the optimized geometries reduce imbibition time by 5%-10%, and in some cases even more, compared to uniform capillaries, while achieving improved velocity uniformity, particularly during the early imbibition stages.

Theoretical predictions are validated by lattice Boltzmann method (LBM) simulations, confirming the superior performance of the optimized geometries. This study provides a framework for passive geometric optimization of capillary-driven multiphase flow, with direct implications for enhanced oil recovery, fracturing fluid flowback, and fluid transport in porous media.

Keywords: Capillary Imbibition, Geometric Optimization, Multiphase Flow, Enhanced Oil Recovery, Lattice Boltzmann Method

✉ Corresponding Author Email: shengtingzhang65@gmail.com

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:146

Welding of Exotic Materials

Adnan CALIK^{1*}, Nazim UCAR² and A. Faruk ÖZDEMİR²

*1 Isparta University of Applied Sciences, Faculty of Technology, Mechanical Engineering,
32260,Isparta, Turkey*

*2 Süleyman Demirel University, Faculty of Engineering and Natural Sciences, Department of
Physics,32260, Isparta, Turkey*

ABSTRACT

Exotic materials are high-performance alloys of stainless steel, aluminum, nickel, titanium, magnesium and copper. Hastelloy C 276 (UNS N10276) is known as an exotic material and is a nickel-chromium-molybdenum alloy with very high corrosion resistance to many chemical environments. In this study, The weldability of Hastelloy C-276/Hastelloy C 276 alloys by manual gas tungsten arc welding (GTAW) and the microstructure properties resulting from welding were investigated. After the welding process using ERNiCrMo-4 welding filler wire and argon gas protection, it was observed that the welded materials did not have any defects or discontinuities and had high welding quality. In addition, in microstructure analyses, features such as dendritic structures, grain boundaries and annealing twins are thought to play a critical role in increasing the mechanical strength of the material and providing ductility.

Keywords: *Hastelloy C-276, Gas Tungsten Arc Welding (GTAW), welding, Microstructure, microstructure, ERNiCrMo-4*

A 3D method for evaluating the sphericity of proppant in the field of hydraulic fracturing

Panpan ZHANG¹, Zongjie MU^{2✉}, Pengbo YIN³, Qilong WEI⁴, Shouceng Tian⁵

¹ *China University of Petroleum (Beijing) at Karamay, Karamay, China*

² *Xinjiang Key Laboratory of Oil and Gas Intelligent Exploration and Development, Karamay, China*

ABSTRACT

With global energy demand growing, unconventional oil and gas resources, as a vital supplement to conventional ones, play an increasingly key role in relieving energy shortages and safeguarding energy security. Hydraulic fracturing is a primary technique for stimulating unconventional reservoirs, which injects fracturing fluid and proppants to create artificial fractures, enhancing reservoir conductivity and facilitating the development of such resources. Proppants in fractures significantly affect their conductivity, with higher sphericity linked to wider fractures and better conductivity. Though sphericity is a 3D property, current assessment methods mainly depend on 2D microscopic images. An additional critical notion pertains to the influence of the center of gravity on potential energy. In the context of randomly distributed proppants, their vertical extension is often found to be comparatively smaller than their horizontal counterpart. Consequently, this disparity in dimensions poses a challenge in the accurate determination of proppant sphericity based on two-dimensional imaging. Therefore, there exists a pressing need for the development of a method grounded in the three-dimensional attributes of proppants to accurately assess their sphericity. This paper presents an innovative approach using 3D imaging technology, integrating 3D proppant features like height, surface area, and volume to improve evaluation accuracy, overcoming 2D limitations and holding broad application prospects as a new industry standard.

Keywords: *Hydraulic fracturing, Proppants, Sphericity, 3D imaging, Unconventional Reservoirs*

[✉] *Corresponding Author Email* : *mzongjie@126.com*

The transformation of the microscopic fracture mechanism of rock induced by confining pressure and its macroscopic fracture response

Senlin Luo, Guangqing Zhang[✉], Bin Sun, Jia Qiao, Hao Li, Zhuang Li

China University of Petroleum (Beijing), College of Petroleum Engineering, Beijing-China

ABSTRACT

Rock is in a complex stress state in deep oil and gas extraction, and confining pressure is a crucial factor affecting fracture behavior of rock. This study aims to reveal the influence law and mechanism of confining pressure on mode I fractures of rock. The three-point bending experiments on sandstone under 0-30MPa confining pressure level were conducted. We analyzed the microfracture development process by acoustic emission monitoring technology, and utilized 3D scanning technology to characterize the mode I fracture characteristics, and revealed the fracture energy evolution mechanism. The results show that the inhibition of microfracture formation by the confining pressure leads to a longer development process of the fracture process zone, and thus the rock exhibits significant nonlinear failure characteristics; a higher confining pressure consistently produced a smoother fracture surface with a smaller fractal dimension and roughness coefficient; The internal microscopic fracture mechanism of rocks at high confining pressure levels changes from intergranular fracture to transgranular fracture, which requires more energy to be dissipated. The transformation of the microscopic fracture mode is the fundamental cause leading to a smooth fracture surface, increased fracture toughness and increased fracture energy. This research provides experimental basis and theoretical support for the fracturing of deep reservoirs.

Keywords: *Confining pressure, Nonlinear fracture, fracture mechanism*

[✉] Corresponding Author Email : zhangguangqing@cup.edu.cn

Abs. No:153

Elaboration and study of hybrid material of polyvinyl alcohol / polypyrrole Cu-Ni

Chouder Dalila¹, BelguerbiOuafia², Seid Lamria¹

1- Laboratoire d'énergétique et électrochimie de solide LEES – Sétif 1

2- Research centre in industrial technologies CRTI, Cheraga, Algeria

ABSTRACT

Polyvinyl alcohol /polypyrrole Cu-Ni films were prepared by solution costing technique using chemical oxidolive. Polymerization of pyrrole. This technique produces addictive flexible and free-standing polymer composite films. Various techniques of characterizable (IR-UV) were applied to analyse copper and nickel interacted with PVA/PPY were obtained.

Also, in this study the electrochemical reclarify of the elaborate electrode denoted PVA/PPY/Cu-Ni was examined by cyclic voltametrie with respect to the oxidates of ascorbicacid in acid medium.

The results obtained affirm that PVA/PPY/Cu 0.85 Mi 0.15 has higher electrocatalytic activity then the PVA/PPY Cu0.50 Ni0.50 and PVA/PPY Cu 0.5 Ni 0.85.

Keywords: PVA/PPY/Cu-Ni, casting technique films, ascorbic acid.

✉Corresponding Author Email : chouderd@yahoo.com

Abs. No:154

Electrochemical synthesis of polyaniline and his dipping by ions Ni²⁺

Chouder Dalila¹ Belguerbi Ouafia ² Seid Lamria ¹

1- Laboratoire d'énergétique et électrochimie de solide LEES – Sétif 1, Algeria

2- Research centre in industrial technologies CRTI, Cheraga, Algeria

ABSTRACT

This work consists in the production of new composite materials obtained on an indium tin oxide (ITO) electrode from a polyaniline, in which a nickel transition metal is incorporated in the form of microparticles.

The deposition of the polymer film is on the electrode and is obtained by electrochemical polymerization of the monomer in an aqueous Medium.

Incorporation of the nickel particles into the polymer film is accomplished by dipping the modified electrode in a nickel sulphate solution to complex the Ni²⁺ cations, followed by electro reduction in an aqueous solution of the electro deposition process.

The characterisation of the electrode material obtained were examined by Cyclic Voltammetry (CV) and Electrochemical Impedance Spectroscopy (SIE) as well as an Atomic Force Microscopy (AFM) and Scanning Electron Microscopy (SEM)

Keywords: *Electro polymerization, Polyaniline, Modified electrode*

✉Corresponding Author Email : chouderd@yahoo.com

Synthesis of chemical polyaniline and his dopage by metallic oxide

Chouder Dalila ¹,Gouichiche Amina ¹,Belguerbi Ouafia ²,Seid Lamria ¹

E-mail: chouderd@yahoo.com

1- Laboratoire d'énergétique et électrochimie de solide LEES – Sétif 1, Algeria

2- Research centre in industrial technologies CRTI, Cheraga, Algeria

ABSTRACT:

In this study, we have made the chemical synthesis in powder form of polyaniline in an acid medium.

The synthesis of polyaniline Mgo and polyaniline MnO₂ composite materials by varying the oxide concentration to improve their physico-chemical and conductive properties the materials composite developed Pani-MgO and Pani-MnO₂ were characterised by spectroscopic methods UV visible and IR analysis.

Also studied the electrochemical properties of composite materials using cyclic voltammetry and conductive properties using the impedance method.

Key words: Aniline, Magnesium oxide, Manganese dioxide, Composite polymer chemical synthesis

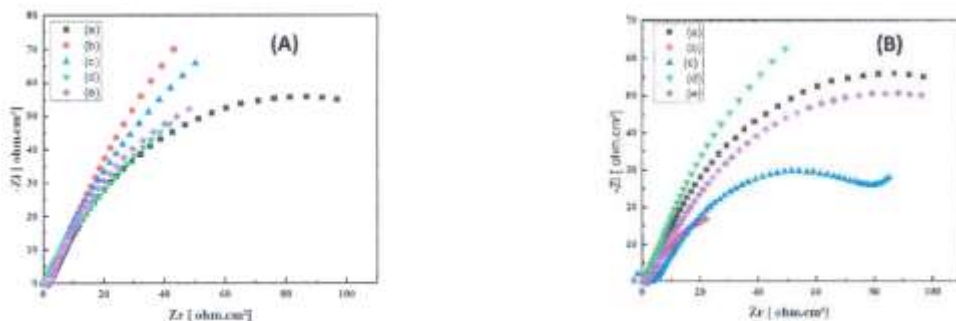


Diagramme d'impédance relative au matériaux composite Pani-MnO₂ (A) et Pani-MgO (B) a differente concentration (a, b, c, d, e) 0,5,10,15 et 20% de MnO₂ et MgO dans une solution de H₂SO₄ 0.5M obtenu sur une gamme de fréquences comprise entre 100 kHz et 10 mHz.

References:

1. Shen, Y.; Wan, M.; Synth. Met., 96, 127, (1998)
2. T. Kazuyoshi, T.; Tokushige, S.; Michio, "Theoretical study of polymerization of pyrrole" Synth. Met. 30, 271, (1989).
3. D. Oukil, L. Benhaddad, R. Aitout, L. Makhrouf, F. Pillier and B. Saidani, Sens. Actuators B204, 203, (2014).
4. M. Sahin, L. Ozcan, B. Usta and Y. Sahin, Biosens. Bioelectron. 24, 3492, (2009).
5. J.G. Ibanez, A. Alatorre-Ordaz, S. Guitierrez Grandos and N. Batina, Polym. Degrad. Stab. 93, 827, (2008).
6. W. Shi, C. Liu, Y. Song, N. Lin, S. Zhou and X. Cai, Biosens. Bioelectron. 38, 100, (2012)

Abs. No:155

Dual-Pathway Optimization of Supercapacitor Components Using PEDOT-Fe₃ O₄ Electrodes and Borate-Enhanced HES Electrolytes

Gülsah CELİK GÜL^{1✉}, Şeymanur KÖSE², Ayşe Hatun POYRAZ², Seda BEYAZ²

¹ *Balıkesir University, Savaştepe Vocational School, Balıkesir-TURKEY*

² *Balıkesir University, Science Art Faculty, Chemistry Department, Balıkesir-TURKEY*

ABSTRACT

This study presents a complementary investigation into the development of high-performance supercapacitor materials through the integration of conductive polymers, nanostructures, and advanced polymer electrolytes. In the first part of the research, Poly(3,4-ethylenedioxythiophene) (PEDOT) was employed as a conductive polymer due to its excellent thermal and environmental stability, low band gap, high electrical conductivity, and optical transparency. Fe₃ O₄ nanoparticles, synthesized via precipitation, were incorporated to enhance specific capacitance, benefiting from their low cost and ease of production. The electrodes were fabricated using a layer-by-layer film deposition method, and a widely used PVA-KOH gel served as the electrolyte. PEDOT was prepared via emulsion and mini-emulsion polymerization techniques to optimize its structural and electrochemical characteristics.

In the complementary study, hydroxyethyl cellulose (HES) films were modified with a concentrated sodium borate (SB) solution, prepared from boric acid and borax, to improve their conductivity. The introduction of SB significantly reduced the film resistance, while the addition of phosphoric acid further enhanced conductivity, reaching a maximum of 8.5×10^{-3} S/cm—doubling the performance of previously reported Borax-HES systems. Fourier-transform infrared (FTIR) spectroscopy revealed the formation of cross-linked structures between HES and borate ions, contributing to improved mechanical stability and antimicrobial properties. These enhancements support the potential of SB- and acid-modified HES films as functional electrolytic components in supercapacitor systems.

Keywords: *PEDOT, Borate solution, Capasitor, HES*

✉ *Corresponding Author Email* : gulsahcelik@balikesir.edu.tr

A Cost-Effective Microwave Route to Borohydroxyapatite: Crystallinity, Elemental Composition, and Vickers Hardness Evaluation

Gülşah CELİK GÜL^{1✉}, Fadime ÇOBAN²

¹ Balıkesir University, Savaştepe Vocational School, Balıkesir-TURKEY

² Balıkesir University, Science Art Faculty, Chemistry Department, Balıkesir-TURKEY

ABSTRACT

Boron-substituted hydroxyapatites have emerged as promising candidates for bone tissue engineering due to their enhanced bioactivity, biodegradability, and mechanical properties. In this study, borohydroxyapatite compounds were synthesized using a microwave-assisted method by reacting colemanite ($2\text{CaO} \cdot 3\text{B}_2\text{O}_3 \cdot 5\text{H}_2\text{O}$) with various phosphate sources— H_3PO_3 , $(\text{NH}_4)_2\text{HPO}_4$, $(\text{NH}_4)_2\text{HPO}_4$, and $\text{Ca}_3(\text{PO}_4)_2$ —at different molar ratios. Sixteen different compositions were prepared, and the mixtures were irradiated at 600 W and 800 W for 10–15 minutes using a household microwave oven. The resulting materials were characterized by FTIR spectroscopy, X-ray diffraction (XRD), and scanning electron microscopy coupled with energy-dispersive X-ray spectroscopy (SEM/EDX). FTIR analyses identified specific samples exhibiting vibrational modes distinct from the raw materials, indicating the formation of new crystalline phases. XRD results confirmed the partial formation of borohydroxyapatite alongside unreacted colemanite. SEM/EDX analyses further revealed the coexistence of calcium, phosphorus, boron, and oxygen, supporting the successful incorporation of boron into the apatite lattice. Among all samples, one of them (colemanite and $\text{Ca}_3(\text{PO}_4)_2$ at a 2:1 molar ratio) exhibited the most promising crystallinity and mechanical performance, with a Vickers hardness value of approximately 95 HV. This level of hardness places it within the optimal range for dental restorative materials. These findings suggest that microwave-assisted synthesis using borate-rich precursors offers a rapid, low-cost, and environmentally friendly route for producing boron-containing apatites with strong potential for orthopedic and dental biomaterial applications.

Keywords: Apatites, Microwave synthesis Biomaterial

✉ Corresponding Author Email : gulsahcelik@balikesir.edu.tr

HYPERHOMOCYSTEINEMIA AND ALZHEIMER'S DISEASE

Souhila MEHERHERA^{1✉}, S.ALI KHOUDJA², S.ZEKARA³, S.ABDI.

¹ SAAD DAHLAB University, Pharmacy Department, Blida -ALGERIA

² SAAD DAHLAB University, Medecine Department, Blida-ALGERIA,

ABSTRACT

BACKGROUND-AIM

Alzheimer's disease (AD) is characterized by disorders of short-term memory, executive functions and orientation in time and space. Several factors are implicated in its onset, including genetic factors, age, the environment and cardiovascular risks (diabetes, hypertension, hyperlipidemia). In addition, several studies have suggested that increased plasma homocysteine levels are an important modifiable risk factor for vascular dementia and AD. so we aim to study the relationship between homocysteine (Hcy) and Alzheimer's disease (AD)

METHODS

This is a case-control study. Cases were Alzheimer's patients, and controls were subjects over 40 years of age and free of any neurodegenerative disease. Cases and controls underwent a biochemical work-up including blood glucose, renal, lipid and inflammatory tests, as well as homocysteine measurement on the Cobas Integra 400 plus, in addition to a completed information form. Statistical analysis was performed using IBM SPSS version 26 software to assess the relationship between Hcy and AD, as well as other potential risk factors.

RESULTS

A total of 100 controls and 50 cases were recruited for this study. Different anthropometric, clinical and biological characteristics were compared between cases and controls, Univariate analysis indicated a significant association between early education, nutritional status, advanced age and AD ($P<0.05$). Also a significant association between Hcy and AD ($P=0.023$), suggesting that high levels of Hcy could be a potential risk factor for the development of AD. Using multivariate regression, Hcy ($P=0.04$ /OR=2.54, 95% CI: 1.04-6.17) and advanced age (0.000/OR=1.18, 95% CI: 1.10-1.26) emerged as independent risk factors for AD. The ROC curve for plasma Hcy as a risk factor for AD showed an AUC= 0.62

(0.52-0.72) with a $P=0.017$, a sensitivity=60% and a specificity of 69% for a homocysteine threshold of 20.33 $\mu\text{mol/L}$.

CONCLUSIONS

This study provides evidence to support a significant relationship between Hcy and other risk factors and AD. Further research is needed to elucidate the underlying mechanisms and explore potential preventive and therapeutic strategies targeting these risk factors for the management of AD.

Keywords: homocysteine, Alzheimer, association

Abs. No:158

HOMA AND TYG INDICES IN PATIENTS WITH METABOLIC SYNDROME: COMPARATIVE STUDY

Souhila MEHERHERA^{1✉}, K.BAADJ¹, N.BAKEZZI¹, S. ABDI²

¹ SAAD DAHLAB University, Pharmacy Department, Blida-ALGERIA

² SAAD DAHLAB University, Medecine Department, Blida-ALGERIA,

Abstract

BACKGROUND-AIM

Metabolic syndrome (MetS) is a public health problem. It is a grouping of several metabolic abnormalities in the same individual metabolic abnormalities, which predisposes to cardiovascular risk and type 2 diabetes. Insulin resistance is a pathophysiological factor in these patients; it is estimated by calculating the HOMA (homeostasis model assessment) index, which is the most widely used and best validated method. The tyg index is a new insulin resistance score

The aim of this study was to compare triglyceride–glucose (TyG) and HOMA index in patients with at least one factor of the metabolic syndrome.

METHODS

we carried out a prospective study on 130 patients with at list one factor of métabolic syndrome , for whom an information sheet was duly completed. Various biological parameters were measured, including glycemia, HbA1c, lipid balance and insulin. the HOMA index was calculated using the formula: $\text{insulin (mU/L)} \times \text{glucose (mmol/L)} / 22.5$ and the Tyg index using the formula: $\text{Ln}[\text{fasting triglyceridemia (mg/dL)} \times \text{fasting glucose (mg/dL)}] / 2$ statistical analysis was performed using spss software

RESULTS

Our study included 130 patients, 66.2% of whom were women (SR=0.51). The mean age of the patients was 61.51 years (SD= 9.16). The mean insulinemia was 9.65 IU/l (SD=9.35), the HOMA index 3.83 (SD=6.45), and the Tyg index 4.90 (SD=0.34). the prevalence of insulin resistance was 76.2% according to the HOMA index, and 92.3% according to the Tyg index , there was an association between the HOMA index and hyperglycemia ($p=0.002$), hypertriglyceridemia ($p=0.03$), hypoHDLemia ($p=0.03$) and waist circonference ($p=0.001$), a positive correlation between the two indices HOMA and Tyg ($\text{Rho} = 0.155$, $p=0.04$, $\text{AUC} = 0.802$)

CONCLUSIONS

TyG index is a useful tool which can be used as a simple and inexpensive alternative to assess insulin sensitivity

Keywords: *TYG index, HOMA index, matabolic syndrome*

✉ Corresponding Author Email : soupharm_07@hotmail.com

A Noise Reduction Evaluation Method for coal petrology CT Images Based on Multi-index Fusion and Dynamic Weight Allocation

Qilong WEI¹, Zongjie MU^{2✉}, Panpan ZHANG², Changhui ZENG¹, Pengbo YIN¹

¹ *China University of Petroleum (Beijing), China*

² *Xinjiang Key Laboratory of Oil and Gas Intelligent Exploration and Development, Karamay, China*

ABSTRACT

As an unconventional clean energy resource, coalbed methane (CBM) is primarily stored within coal matrix pore systems. High-fidelity digital core modeling constitutes an essential prerequisite for accurately characterizing coal structural architecture. High-precision denoising of coal rock CT images is crucial for digital core modeling. However, existing evaluation methods rely on single indicators or subjective judgments, failing to accurately quantify filtering effects in complex noise environments. This study proposes a noise reduction evaluation framework for coal rock CT images based on multi-index fusion, introducing a frequency-divided dynamic weight signal-to-noise ratio (QPSNR). By integrating multi-dimensional features including the Gray Level Co-occurrence Matrix (GLCM), Edge Preservation Index (EPI), Structural Similarity Index (SSIM), and spectral energy analysis, a comprehensive evaluation is achieved through an information entropy-optimized nonlinear dynamic weight mechanism, enhancing the accuracy of reservoir quality assessment. Experiments were carried out using coal rock images with a resolution of 0.2 μm to optimize parameters and evaluate the performance of 10 widely used filtering techniques. Results show that the method effectively quantifies the protection of high-frequency microstructures and low-frequency density distributions, reducing the noise reduction error rate from >18% in traditional methods to 4.2-6.5%. The QPSNR index improves the recognition accuracy of coal rock-specific “salt-and-pepper-Gaussian” mixed noise by 32%. The proposed multi-scale analysis framework and adaptive weight model establish a noise reduction evaluation standard for digital cores, providing high-quality data support for permeability prediction in coalbed methane reservoirs.

Keywords: *Digital Core, Coal Rock CT Images, Multi-index Fusion, QPSNR*

✉ *Corresponding Author Email: mzongjie@126.com*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:161

Özel Öklid Lie Grubu $SE(2)$

Elif Akgün Aslan, Mehmet Sezgin

Trakya Üniversitesi, Fen Fakültesi Matematik Bölümü, Edirne, Türkiye

ÖZET

Bu çalışmada ilk önce Lie grubu tanımı ve $SE(2)$ grubu ifade edildi. Daha sonra bu grubun sonsuz küçük operatörleri ve Casimir operatörü elde edildi. Bu operatörle oluşturulan özdeğer ve özfonksiyon probleminin çözümü verildi. Fiziksel bir sistemin Hamiltonyeni ile sistemin simetri grubunun Casimir operatörü arasındaki ilişkiden Schrödinger denkleminin çözümü olan dalga fonksiyonu elde edildi.

Anahtar Kelimeler : *Lie grubu, Casimir operatörü, Schrödinger denklemi*

✉ Corresponding Author Email: elifakgunaslan@trakya.edu.tr, msezgin22@yahoo.com

Abs. No:162

The Benefits of Automation in Immunohistochemistry: Efficiency, Standardization, and Cost Savings

Jasmina MARKOVIĆ-LIPKOVSKI^{1✉}, Nataša STANIĆ², Maja ŽIVOTIĆ¹, Marijana ZIMONJIĆ³

1 Faculty of Medicine, University of Belgrade, Institute of Pathology, Belgrade-SERBIA

2 Institut za zdravstvenu zaštitu majke i deteta, Belgrade-SERBIA

3 Megatrend University, Belgrade-SERBIA

ABSTRACT

The growing demands in pathology laboratories have driven the adoption of automation to improve efficiency, reduce costs, and ensure consistent quality. This study compares manual and automated immunohistochemistry (IHC) processes in a high-volume laboratory setting. Using a standardized workload of 48 microscope slides—the maximum capacity of the DAKO Autostainer Link 48 immunostainer, we evaluated the time and total cost required to complete IHC staining using both methods. In our analysis, the manual IHC procedure required approximately 460 minutes per cycle, while the automated immunostainer completed the same workload in 390 minutes. This resulted in a noticeable time savings of around 15.22%. Furthermore, the cost of reagents per slide was lower when using automation (7.09 EUR) compared to the manual protocol (11.63 EUR). Technician hands-on time also differed, with 400 minutes of manual work required (0.50 EUR per slide) compared to only 80 minutes in the automated process (0.10 EUR per slide). Costs for consumables (0.12 EUR per slide) and electricity (0.01 EUR per slide) were similar between the two methods. The automated procedure also accounted for depreciation (0.29 EUR per slide) and annual maintenance costs (0.08 EUR per slide). Ultimately, the overall cost per slide was 12.26 EUR for the manual procedure and 7.69 EUR for the automated procedure, highlighting a cost reduction of approximately 37%. Beyond time and cost savings, automation ensures greater process standardization, contributing to higher reliability and reproducibility of results. Overall, automation improves turnaround time, reduces costs, enhances standardization, and supports sustainable, high-quality diagnostic workflows.

keywords: *automated immunostainer, immunohistochemistry, process standardization, automation, cost-efficiency, laboratory workflow*

✉ Corresponding Author Email : aleksandar.lipkovski@matf.bg.ac.rs

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Assessment of the oxidative stress on the human health in
Algeria**

Dr KHADER.N¹, GUERFI. Bahdja²

¹⁻ Biophysics laboratory, Faculty of Medicine, University Saad Dahlab of Blida 1, BP 270 Soumaa, 09000, Blida, Algeria. Corresponding Author Email : khader_nadia@yahoo.fr

²⁻ Medicinal Chemistry Laboratory , Faculty of Medicine, University Saad Dahlab of Blida 1, BP 270 Soumaa, 09000, Blida, Algeria.

ABSTRACT

Introduction:

Oxidative stress is a biochemical process resulting from an imbalance between the production of reactive free radicals and the body's antioxidant defence mechanisms. This phenomenon has been extensively studied in the fields of biology and medicine, and its impact on human health is increasingly recognised.

Objectives:

The study evaluates perceptions, knowledge, risk factors, prevention, impact on quality of life, and doctors' views on oxidative stress.

Methods:

This is a cross-sectional observational study, a questionnaire distributed and completed by a sample of doctors and people from the general population, the survey was conducted through Google forms.

Results :

The survey reveals varying perceptions of oxidative stress. Enhancing awareness and encouraging healthy habits nutrition, exercise, sleep, and avoiding smoking are vital to lessen its effects. Ongoing training for healthcare professionals is essential to ensure high-quality patient care.

Conclusion :

Oxidative stress contributes to the development of many diseases. Understanding its mechanisms is essential for effective prevention and treatment. A healthy lifestyle helps reduce it and supports overall well-being.

Keywords : *Oxidative stress, antioxidant, reactive free radicals*

Abs. No:172

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**MOLAR BANDS MICROBIOLOGICAL CONTROL OF
THE EFFECTIVENESS OF THE DISINFECTION
PROCESS**

Samia.BEROUAKEN^{1✉}, DAHMAS ², Samia.ABDI³

¹ *BLIDA University, Pharmacy Department, Blida- ALGERIA*

² *BLIDA University, dental Department,*

³ *BLIDA University, Medicine Department,*

ABSTRACT

I.INTRODUCTION:

The objective of disinfection and sterilization for dento-facial orthopedics to prevent infectious risks both for the patient and the health care team.

II.OBJECTIVE:

Checking the effectiveness of the disinfection process of molar bands.

III.MATERIAL AND METHODS:

This is a serial case study, carried out at the the Microbiology Unit of the Central Laboratory of the University Hospital Centre unit Frantz Fanon.

The study involved 48 molar bands. Each instrument was swabbed three samples, one directly after contact with the patient's oral cavity, and two after 10 and 15 minutes of disinfection.

IV.RESULTS:

Microbiological analysis showed that 100% of molar bands the collected not disinfected are contaminated by bacteria with polymicrobial cultures mainly composed of Streptococci and Neisseria.

79.17% of the molar bands disinfected for 10 minutes are contaminated with bacteria.

43.75% of the molar bands disinfected for 15 minutes are contaminated with bacteria.

The disinfection rate of the molar bands was 20.83% after the first disinfection time and 56.25% after the second disinfection time with $p < 0.05$, the difference is significant.

V.CONCLUSION:

To reduce cross-infections transmission, sterilization of reusable instruments, and the use of medical and surgical materials to single use is the best way to ensure the safety of patients and staff from infectious risk.

Keywords: Disinfection, Infectious risks, Microbiology control, Molar bands.

✉ *Corresponding Author Email*

: berouaken_samia@univ-blida.dz

Abs. No:176

Experimental Research on the Disturbance between Fractures and Crack Propagation in Hydraulic Fracturing of Conglomerates

Xiaodi Li^{1✉}, Hongkui Ge¹, Jianbo Wang², Jiantong Liu²

¹ *China University of Petroleum-Beijing, Unconventional Petroleum Research Institute, Beijing-CHINA*

² *China University of Petroleum-Beijing at Karamay, School of Petroleum, Karamay-CHINA*

ABSTRACT

Mahu conglomerate reservoir is rich in oil and gas resources and of great development potential. However, due to characteristics such as low porosity, low permeability, and strong heterogeneity in conglomerate reservoirs, the control of formation fracturing and crack propagation is difficult, severely affecting the effectiveness of fracturing transformations. Therefore, it is necessary to study the disturbance between cracks and the propagation laws of cracks in hydraulic fracturing of conglomerates. This paper explores the influences of factors such as horizontal stress difference, pump capacity, fracturing method, and well spacing on hydraulic crack initiation and extension through small-scale double well fracturing simulation experiments. The research results indicate: when two wells use the same pumping source for simultaneous fracturing, the distribution of fracturing fluid output in the two wells is uneven, and the degree of crack propagation is inconsistent; when two wells use different pumping sources but the pumped volumes are the same, crack propagation is significantly affected by the horizontal stress difference, mainly forming cracks parallel to the direction of the maximum principal stress; small well spacing can cause adjacent cracks to be in a high induced stress zone, increasing the level of stress interference; an increase in pump capacity raises the hydrostatic pressure within the cracks, shortening the interaction time between the fracturing fluid and conglomerate, making crack propagation relatively simple; during sequential fracturing of double wells, the propagation of cracks in the later-fractured well is greatly influenced, leading to deflection and intersection phenomena after the cracks converge.

Keywords: *Hydraulic Fracturing Simulation Experiments, Conglomerate, Crack Propagation*

✉ Corresponding Author Email : 15264201108@126.com

Abs. No:179

Experimental Investigation of Shear Friction Characteristics in Volcanic Rock Under In-Situ Shear-Enhanced Permeability Conditions

Mengjie LI¹, Bei LV², Kaixin LIU², Yufei ZHANG², Junwang FU¹, Shiyuan LI¹✉

¹ *China University of Petroleum-Beijing, College of Petroleum Engineering, Beijing-CHINA*

² *Engineering Technology Research Institute of Petrochina Xinjiang Oilfield Company, Karamay-
China*

ABSTRACT

Multistage hydraulic fracturing in horizontal wells has become a cornerstone technology for the efficient development of volcanic hydrocarbon reservoirs. The creation of an interconnected fracture network system, where hydraulically induced fractures intersect with pre-existing natural fractures, is crucial for optimizing stimulation effectiveness. This study integrates petrographic characterization (analyzing mineral composition and rock fabric) with a specialized experimental system simulating in-situ fracturing environments capable of shear-enhanced permeability measurements. Four representative Carboniferous volcanic lithologies—andesite, basalt, tuff, and volcanic breccia—were investigated to assess their fabric properties and shear friction behavior. Key results demonstrate: (1) Significant variations in shear-induced slip behavior exist among different volcanic lithologies. (2) Distinct mineralogical compositions and microstructural characteristics are the primary factors governing lithology-specific shear friction responses. (3) Volcanic lavas (basalt and andesite) exhibit markedly higher shear modulus and shear strength compared to pyroclastic rocks (tuff and volcanic breccia). These findings provide critical insights into the influence of volcanic rock composition and structure on shear friction heterogeneity under reservoir stimulation conditions.

Keywords: *Volcanic rock, Shear-Enhanced Permeability, Shear Friction Behavior*

✉ *Corresponding Author Email* : *lishiyuan1983@cup.edu.cn*

Abs. No:180

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Investigation of an integrated organic rankine cycle
combined with water/ lithium bromide absorption chiller for
a petroleum process application**

**Sofiane ABERKANE^{1,2✉}, Hamza SEMMARI³, Juan Carlos BRUNO ⁴, Alberto
CORONAS ⁴**

¹ *Mechanical Engineering Department, Faculty of Applied Sciences, University of Bouira,
10000, Bouira, Algeria,*

² *Laboratory of Energy and Mechanical Engineering, Faculty of Technology, university M'hamed
Bougara of Boumerdes, Algeria,*

³ *Laboratoire de Mécanique et systèmes énergétiques avancés, Ecole Nationale Polytechnique de
Constantine, BP 75, Nouvelle ville RP, Constantine, Algeria,*

⁴ *Mechanical Engineering Department, Universitat Rovira i Virgili, Tarragona, Spain*

ABSTRACT

Waste heat and flare gas recovery through the integration of polygeneration energy system can enhance energy efficiency and reduce greenhouse gas emissions across various industrial applications, particularly with high carbon footprints such as the petroleum industry.

This study investigates a Combined Cooling and Power system (CCP). The CCP system utilizes gas turbine exhaust gas and flare gas heat recovery to activate both Organic Rankine Cycle (ORC) for electricity generation and water/lithium bromide absorption chiller for cooling. The investigation concerns an Algerian upstream petroleum facility. The energy performance of the CCP system is analyzed using the Aspen tool.

This new polygeneration configuration is expected to directly reduce natural gas consumption and greenhouse gas emissions. Additionally, it offers another advantage by eliminating flare taxes.

Keywords: *Waste heat recovery 1, flare gas 2, Organic Rankine Cycle 3, absorption refrigeration system 4, combined cooling and power 5, energy efficiency 6*

✉ *Corresponding Author Email* : *s.aberkane@univ-bouira.dz*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Assessment of the Tram Track Structure Condition Using
Impulse Vibroacoustic Testing**

**Cezary KRAŚKIEWICZ¹✉, Artur ZBICIAK¹, Przemysław MOSSAKOWSKI¹,
Kacper WASILEWSKI¹**

1 Warsaw University of Technology, Faculty of Civil Engineering, Warsaw-POLAND

ABSTRACT

The technical condition of tramway track infrastructure plays a critical role in ensuring the safety, comfort, and environmental sustainability of urban transport systems. Degradation of track structures contributes to increased vibration and noise emissions, which can significantly impact the quality of life in densely populated areas. Reliable diagnostics of track performance, especially in terms of dynamic behavior, is essential for minimizing adverse effects on buildings and residents, while also maintaining efficient tram operation.

This paper presents the results of experimental investigations conducted on the newly commissioned Rapid Tram route in Poland. The research was carried out in the context of a track surface repair program, with the aim of assessing the technical state of the track structure using advanced vibroacoustic methods. The objectives included evaluating the effectiveness of vibration attenuation solutions, the impact of maintenance interventions, and the operational durability of the track under service loads.

The study involved field tests performed according to dedicated, developed by the authors, procedures and the EN 15461 standard. The scope encompassed impulse vibration attenuation measurements, dynamic characterization using the Track Decay Rate method, continuous monitoring of vibration propagation during tram operations, and synchronized deflection measurements under live loading. Vibration transmission was analyzed across multiple interfaces: from rail to track slab, curb elements, subgrade, and nearby buildings with measurements in both vertical and transverse directions.

The findings confirm the usefulness of vibroacoustic diagnostics in evaluating the performance of tramway infrastructure and guiding repair strategies to mitigate environmental impacts in urban contexts.

Keywords: *Tram track structure diagnostic, Impulse field test, Track Decay Rate*

✉ Corresponding Author Email: cezary.kraskiewicz@pw.edu.pl

Abs. No:185

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**"Solving Volterra Fuzzy Integral Equations Using the Fuzzy
Sumudu Transform"**

Artan F.ALIDEMA^{1✉}, Frederik DARA²

¹ *University of Prishtin, Department of Mathematics, Prishtinë-Kosovo*

² *University of Tirana, Department of Applied Mathematics, Tirana-Albania*

ABSTRACT

This paper presents the application of the fuzzy Sumudu transform as an analytical method for solving Volterra fuzzy integral equations of the first kind with convolution kernels, under Hukuhara differentiability. The study demonstrates that fuzzy sumudu transform provides a simple, reliable, and effective approach for handling such integral equations. Finally, a representative example is included to illustrate the proposed method.

Keywords: *fuzzy Sumudu transform , integral equations, effective approach.*

✉ *Corresponding Author Email* : *artan.alidemal@uni-pr.edu*

Reference

- [1] A. Georgieva, M. Spasova. Solving nonlinear Volterra-Fredholm fuzzy integro-differential equations by using Adomian decomposition method. AIP Conference Proceedings. 2333, 080005, 2021.
- [2] R. Goetschel, W. Voxman. Elementary fuzzy calculus, Fuzzy Sets and Systems, 18:31-43, 1986.
- [3] L. Hooshangian. Nonlinear Fuzzy Volterra Integro-differential Equation of N-th Order: Analytic Solution and Existence and Uniqueness of Solution. Int. J. Industrial Mathematics, 11, 1, 2019.
- [4] A. Kaufmann, M. M. Gupta. Introduction to Fuzzy Arithmetic: Theory and Applications. Van Nostrand Reinhold Co.: New York, NY, USA, 1991.
- [5] N. Alam Khan, O. Abdul Razzaq, and M. Ayyaz. On the solution of fuzzy differential equations by Fuzzy Sumudu Transform. Nonlinear Engineering 4(1):49-60, 2015. [6] S. Karamseraji, S. Ziari, R. Ezzati. Approximate solution of nonlinear fuzzy Fredholm integral equations using bivariate Bernstein polynomials with error estimation. AIMS Mathematics, 7(4):7234-7256, 2022.
- [7] S. Min Kang, Z. Iqbal, M. Habib, W. Nazeer. Sumudu Decomposition Method for Solving Fuzzy Integro-Differential Equations. Axioms, 74: 2019.
- [8] Z. Majid, F. Rabiei, F. Hamid, F. Ismail. Fuzzy Volterra Integro-Differential Equations Using General Linear Method. Symmetry, 11:381–291, 2019.
- [9] M. Puri, D. Ralescu. Differential and fuzzy functions. Mathematics Analysis and Applications 91:552-558, 1983.
- [10] L. Stefanini. A generalization of Hukuhara difference and division for interval and fuzzy arithmetic, Fuzzy Sets. Sys., 161:1564-1584, 2010.

Abs. No:187

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Effect of Lubricant Additives on Hybrid Lubrication
Performance**

Sid ali BOUBENDIR^{1✉}, Maamer MALKI², Salah LARBI³, Kamel DJENDER¹

¹ *Department of production and mechanical engineering, University of science and Technology H. B,
Algiers, Algeria*

² *Department of Mechanical Engineering, National Higher School of advanced technologies, Algiers,
Algeria*

³*Department of Mechanical engineering, National Polytechnic School, Algiers, Algeria*

ABSTRACT

To enhance wear resistance and reduce friction, the addition of nanoparticles to lubricants is a widely adopted technique in lubrication engineering. This modification alters the rheological behavior of the lubricant, rendering it non-Newtonian and thereby requiring the use of advanced models to accurately predict system performance. The majority of research on the additives effect, such as nanoparticles or polymers, has focused on hydrodynamic bearings, especially journal bearings. However, when it comes to hybrid bearings (which typically combine hydrodynamic and hydrostatic regime), the body of literature is significantly smaller.

This study presents a theoretical investigation into the lubrication of hybrid journal bearings, taking into account the non-Newtonian behavior of the lubricant. The couple stress fluid theory is employed for mathematical modeling, and the governing equations are solved numerically. The hybrid bearing analyzed is an eccentric cylindrical bearing consisting of identical hydrostatic cells distributed uniformly around the periphery of the bearing. The effects of inlet pressure and the couple stress parameter on bearing performance are examined. The results indicate a significant enhancement in pressure distribution when operating with couple stress fluids compared to the Newtonian case. However, in the hydrostatic case (no-charged bearing), the influence of couple stress effects becomes negligible.

Keywords: *Hybrid Lubrication; Couple stress fluid; Non-Newtonian fluid*

✉ *Corresponding Author Email*

: sidali.boubendir@usthb.edu.dz

Abs. No:190

Enhanced Energy Optimization through IoT Smart Metering and AI-Driven Forecasting and Scheduling

Boutora SALIHA^{1✉}, Hamitouche ISMAIL², Dridi ISLAM³

*^{1,2,3} Institute of Electronic and Electrical Engineering M'Hamed Bougara University, Department of
Power and Control, Boumerdès -ALGERIA*

ABSTRACT

The integration of smart grid technologies has led to significant improvement in energy optimization, thus, new optimization technologies and methods are continuously developed by researchers, such as the integration of optimization algorithms within the home energy management system in the smart home. The main objective of this work is to develop a home energy management system through the integration of artificial intelligence and Internet of Things IoT technologies, with the goal of optimizing energy consumption on the consumer side, reducing electricity bills, and achieving peak load reduction. The software part of the HEMS is simulated in order to implement the load consumption forecasting, optimal load scheduling and battery management in the smart home, using Long Short-Term Memory LSTM and Particle Swarm Optimization PSO algorithms respectively, and a hardware implementation simulating the monitoring functionality of the IoT based smart meter in the Home Energy Management System.

The results of the simulation demonstrate significant savings in the billing and improved peak shaving with better renewable energy and battery integration, contributing to the stability, reliability and sustainability of the network. Additionally lower price billing is achieved and the carbon footprint of the house is reduced due to the enhanced renewable energy management.

Keywords: *Load forecasting, Load scheduling, Battery management, Renewable energy.*

[✉] Corresponding Author Email : *s.boutora@univ-boumerdes.dz*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:191

**New application for detecting desert soil change based on
long-term satellite images**

Nour el islam BACHARI¹, ZEDDAM Chouaib², HAMDY Younes² Lamine SALIM¹

¹ *University of Sciences and Technology Houari Boumediene, Department of Biology, BP 32 El Alia
16111 Bab Ezzouar Algiers, Algeria*

² *University of Algeria-01, Department of computer, , Algeria*

ABSTRACT

Web-accessible satellite imagery, such as data provided by Landsat and Sentinel programs, represents a critical resource for research and operational applications. However, its utilization is frequently hindered by technical constraints, including cloud cover, preprocessing complexity, and the lack of intelligent selection tools. This thesis introduces Optyra, an automated platform designed to optimize the selection of satellite image time series. By leveraging historical climate data (MERRA 2 cloud index) and meteorological forecasts, Optyra efficiently filters usable imagery, minimizing unnecessary downloads and enhancing the quality of thematic analyses. Developed with a modular MVC (Model-View-Controller) architecture, the system provides an intuitive interface for non-expert users while ensuring seamless integration with existing GIS tools. Results demonstrate significant improvements in selection efficiency and better planning for satellite image acquisitions. As an application of the images, we chose to monitor changes in cereal crops in the Algerian desert. We present a framework for detecting land use changes by combining K-Means classification techniques, Principal Component Analysis, and Vector Change Analysis to determine the state of vegetation. The application of the framework gives us interesting results on the state of vegetation cover in the desert.

Keywords: *Satellite image, Cloud index, Change detection*

Abs. No:192

Hybrid statistical and artificial intelligence approach for forecasting wind speeds energy on the west coast of Algeria

Nour el islam BACHARI^{1✉}, Lamri NACEF¹, Fouzia HOUMA²,

¹ Laboratory of Biological Oceanography and the Marine Environment (LOBEM), University of Science and Technology of Houari Boumedien (USTHB), El Alia, PO Box 32, 16111, Bab Ezzouar, Algiers, ALGERIA

² Marine and Coastal Ecosystems Laboratory (ECOSYSMarL), National Higher School of Marine Sciences and Coastal Management (ENSSMAL), 16320 Algiers, Algeria

ABSTRACT

This paper presents a statistical analysis of wind speed and solar energy along the Algerian coastline, using three-hourly data collected between 1960 and 2020 by the National Meteorological Office (ONM). The main objective is to assess the renewable energy potential of the west coastal region. The methodology is based on two complementary approaches: (1) a statistical modeling using the Weibull distribution and Multiple regression (fitted by maximum likelihood), and (2) a predictive model based on machine learning (XGBoost) to forecast short-term variations in wind speed and solar radiation. Descriptive analyses, hierarchical classification, and feature engineering (cyclical encoding, lag variables) were used to identify local regimes and extreme wind events. The results reveal significant variability in wind regimes across regions. Arzew and Oran stand out for their high potential, with strong average wind speeds and estimated production exceeding 1 GWh/year. In contrast, Mostaganem shows low wind performance. The XGBoost model demonstrated good predictive accuracy, with low mean absolute errors for wind speed and direction. However, the Weibull model fit proved insufficient in most cases, suggesting the need for more suitable hybrid models. This study provides key insights for planning wind energy projects and opens perspectives for improvement through approaches combining topographic data and artificial intelligence methods.

Keywords: *Renewable energy, Statistical analysis, XGBoost Model*

**Sustainable Sensor for Monitoring and Deactivating
Waterborne Pathogens in Contaminated Water Sources
using fuctionileased metal nanoparticles**

**Ulviye BUNYATOVA^{1*}; Cengiz KOCUM ¹; Sedat NAZLIBILEK ² ; Kubra ERKAN
TURKMEN ³**

¹ *Baskent University, Biomedical Department, Engineering Facility, Ankara, 06790, Turkey*

² *Baskent University, Electrical and electronical Department, Engineering Facility, Ankara, 06790,
Turkey*

² *Karamanoglu Mehmetbey University, Faculty of Science, Department of Biology,70200, Karaman,
Turkey*

ABSTRACT

The purity of outsourced water pools and resources is critically important for both human health and environmental protection. However, pathogens present in wastewater and biofluids pose a serious threat to public health by contributing to the spread of waterborne diseases and environmental contamination.

In this study, we present a low-cost, mobile system designed with a simple and practical approach for detecting the presence of pathogens in water samples. The sensor is based on an electrical circuit that measures conductivity in the analyte. A silver nanoparticle (AgNP)-based reference was used to calculate the required AgNP quantity for effective deactivation of pathogens present in the sample.

The innovative aspect of the project lies in the direct dispersion of AgNPs into the liquid medium, rather than immobilizing them on electrode surfaces. This method maximizes interaction with bacterial contaminants. The AgNPs were synthesized using green methods and functionalized with natural clay-based nanocomposites.

The measurement circuit allows for real-time monitoring of parameters such as electrical resistance. During experiments, the system was tested with solutions containing *E. coli* (ATCC 25922) and fungi. The results were promising and demonstrate the system's potential for safe water recovery and reuse.

This device holds strong potential for use in field-based water quality monitoring, emergency sanitation scenarios, and decentralized water treatment systems in both rural and urban settings.

Keywords: Mobil sensor, silver nanoparticles, nano sensors, pathogens

Email: corresponding author's e-mail: bunyatovau@yahoo.com

Abs. No:211

Effect of the mass ratio of phosphoric acid on the chemical impregnation of a vegetal waste for the preparation of a porous material.

Ahmed BELGACEM^{1✉}, Renad RABIE¹, Hocine HADOUN², Lotfi FAGHI¹

¹ University Of Science and Technology Houari Boumediene,
Faculty of Mechanical and Process Engineering, Algiers-ALGERIA

² CRNA, Algiers-ALGERIA

ABSTRACT

In this study, several activated carbons were synthesized from a vegetal waste abundant in North Africa, by varying the mass ratio of orthophosphoric acid used as a chemical activation agent while keeping the other preparation parameters constant. The objective was to evaluate the influence of this mass ratio of H_3PO_4 on the properties of the resulting material, with the intention of using it for the adsorption of organic dyes in the context of water treatment, thereby contributing to environmental preservation.

To achieve this, we impregnated four samples of cypress cones, of equal mass, in acid solutions with a concentration of 60%, prepared from a base solution at 85%, with varying impregnation ratios (1:1, 1:2, 1:3, 1:4). The four systems (raw material + acid solution) were subjected to ultrasonic treatment for one hour, then dried in an oven for 24 hours. Subsequently, the samples were carbonized in a microwave oven with fixed irradiation parameters in terms of power and duration. After washing to obtain a neutral pH and drying, the resulting activated carbons were characterized by FTIR, XRD, and methylene blue index (MBI).

FTIR analyses revealed that the obtained materials are rich in oxygenated functional groups, such as hydroxyl groups (OH), ethers (C-O-C), and carbonyls (C=O). These functional groups influence the chemical and physicochemical properties of the material, as well as its interactions with various organic and inorganic substances. The methylene blue index (MBI), which reflects the adsorption capacity of medium-sized molecules, is used to assess the presence of mesopores and macropores. The optimal MBI, measured by UV-visible analysis, is 620.56 mg/g, corresponding to a mass impregnation ratio of phosphoric acid of 1:3. This high value indicates a strong affinity of the material for certain chemical compounds, suggesting a significant adsorption capacity.

These results demonstrate that activated carbon obtained from lignocellulosic biomass can be effectively utilized in various applications, particularly for the purification and separation of undesirable substances present in water, such as organic dyes.

Keywords: Chemical activation, phosphoric acid, activated carbon, vegetable waste.

✉ Corresponding Author Email : belgacem.gp@email.com

Abs. No:212

Green Synthesis of Mesoporous Activated Carbon from Plant Waste for Azo Dye Removal in Water Treatment

Ahmed BELGACEM^{1✉}, Renad RABIE¹, Hocine HADOUN², Lotfi FAGHI¹, Insaf OULDBRAHIM¹

¹ *University Of Science and Technology Houari Boumediene,
Faculty of Mechanical and Process Engineering, Algiers-ALGERIA*

² *CRNA, Algiers-ALGERIA*

ABSTRACT

In this study, we synthesized activated carbon from cypress cone waste, a lignocellulosic biomass, through chemical activation to be applied in the adsorption of a synthetic dye, Basic Blue 41 (BB41), which is mainly used in the textile industry and poses significant environmental hazards.

To this end, a sample of raw material was crushed into millimetre-sized pieces and impregnated with phosphoric acid at a specific concentration and impregnation ratio. The mixture (raw material + acid solution) was stirred for 24 hours, then dried in an oven at 105 °C. The sample was subsequently carbonized in a microwave oven under an inert atmosphere at fixed power and irradiation time. The resulting activated carbon was washed until neutral pH, dried, and characterized using FTIR, XRD, Methylene Blue Index (MBI), BET surface area analysis, and SEM.

The synthesized material was applied for the adsorption of the organic dye BB41 in solution at various concentrations (50, 100, 150, 200, 250, 300, and 350 ppm), under continuous stirring at natural pH, room temperature, with an initial activated carbon dosage of 1 g/L and a contact time of 1 hour. After adsorption, the samples were centrifuged and analysed using UV-Visible spectroscopy.

FTIR analyses revealed that the synthesized material is rich in oxygenated functional groups. The structural analysis showed an amorphous nature with two broad bands around $2\theta = 25^\circ$ and $2\theta = 43^\circ$, similar to graphite. The Methylene Blue Index (MBI), determined by UV-Vis analysis, was 620.56 mg/g. Such a high MBI value indicates that the material has a strong affinity for certain chemical compounds, suggesting a high adsorption capacity, which was confirmed by its high specific surface area obtained by BET. The material was found to be mesoporous, which is favourable for dye removal applications. The adsorption of BB41 followed the Langmuir isotherm model, with a promising maximum adsorption capacity (q_{max}) of 277 mg/g.

Keywords: *Activated Carbon, Plant Waste, Characterisation, Adsorption of BB 41.*

✉ *Corresponding Author Email* : *belgacem.gp@email.com*

Abs. No:214

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Synergistic Evaluation of Ionizing Radiation Shielding in
Novel Lead-Free Alloys Using Geant4 MC toolkit**

Morad HAMAD^{1✉}

¹Al Hussein Technical University, Department of Basic Sciences, Amman-Jordan

ABSTRACT

This study offers an in-depth assessment of the ionizing radiation shielding capabilities of three lead-free alloys through Monte Carlo simulations using the Geant4 toolkit. The simulated linear attenuation coefficients (LAC) were validated against theoretical values from the XCOM database, demonstrating excellent agreement, with most percentage differences falling below 1%. A statistical comparison using the cumulative distribution function (CDF) yielded p-values of 1.00 for all materials, confirming strong consistency between Geant4 and XCOM outputs. Core shielding characteristics, such as the mass attenuation coefficient (MAC), half-value layer (HVL), and mean free path (MFP), were analyzed across a broad photon energy range of 0.015–15 MeV. As a result, samples consistently exhibited superior performance. At 0.5 MeV, all samples achieved the lowest HVL and MFP, along with the highest Z_{eff} and KERMA values compared to different traditional shielding materials. These findings indicate that the high-density alloys are a highly promising alternative to lead-based materials for compact and effective photon shielding, particularly in medical diagnostic environments and radiation-intensive industrial applications.

Keywords: *Alloys, Geant4 MC toolkit, Simulation, XCOM*

✉ *Corresponding Author Email* : *morad.hamad@htu.edu.jo*

Abs. No:215

**Retarding Effect of the Mediating Sulfane (-S-) Group on
Chelation Efficacy of Thiolic-Sulfur Toward Mercury in 2-(2-
Mercaptothiazol-5-yl) acetic acid Derivative. DFT-
Theoretical Study.**

Amer A. G. Al Abdel Hamid

Department of Chemistry, Yarmouk University, Irbid, Jordan

ABSTRACT

Mercapto-containing chelates: 2-(2-mercapto-4-methyl-2,3-dihydrothiazol-5-yl) acetic acid (**AS₂NHM**), 2-(2-mercapto-4-methylthiazol-5-yl) acetic acid (**AS₂NM**), 2-(2-mercapto-5-methyl-3H-pyrrol-4-yl) acetic acid (**ACSNM**), 2-(5-mercapto-3-methylthiophen-2-yl) acetic acid (**AS₂CM**), 2-(2-mercaptothiazol-5-yl) acetic acid (**AS₂N**) and 4-ethylthiazole-2-thiol (**S₂NM**) were studied using DFT method of calculation employing B3LYP/LanL2DZ level of theory.

Computational results have showed that mediating groups (*Sulfane -S- and imine =N-*) along with the attached substituents (*methyl -CH₃ and carboxylic -COOH*) surprisingly have a dramatic effect on charge density localization/delocalization on thiolic-sulfur as a donor atom and thus on its capability of binding the mercuric divalent ion.

Responses for modifications brought by in all simulates were tracked by calculating the charge density on thiolic-sulfur and atoms in proximity. Related changes in geometrical parameters, namely, bond lengths and bond angles in the neighborhood of thiolic-sulfur were also monitored to hopefully provide us with more insights about the effect of the performed modifications. Images of HOMO-LUMO orbitals and charge density distribution surfaces are also presented.

Effects of Sulfane (-S-) mediating group on electron density enrichment of thiolic-sulfur, thus its chelation effectiveness for mercuric ion have been investigated. This is in order to deep understand the chelation weakness of 2-(2-Mercaptothiazol-5-yl) acetic acid (**AS₂NM**) toward mercury(II) ions in particular, which has been encountered in earlier experimental research work.

Findings of the study, have clarified the drawbacks of **AS₂NM** that lay behind its failure in stabilizing the divalent mercuric ion through effective coordination. Nevertheless, it was able of developing stronger binding with Hg metal ions compared to the other chelates, this was attributed to softness close matching with Hg ion.

Keywords: *DFT-theoretical; mercaptothiazol; mediating-group;*

Corresponding Author: Amer A. G. Al Abdel Hamid, amerj@yu.edu.jo

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Learning from Neutrons: Machine Learning and Monte
Carlo Synergy in Shielding Design**

Demet SARIYER^{1✉}, Elif YILDIRIM²

¹ *Manisa Celal Bayar University, Turgutlu Vocational High School, Turgutlu, Manisa, Turkey*

² *Istanbul Technical University, Faculty of Computer and Informatics Engineering, Computer
Engineering Department, Istanbul, Turkey*

ABSTRACT

Machine learning (ML), as a prominent discipline within artificial intelligence, has emerged as a key enabler of significant advancements in data-driven decision-making processes and is widely employed across diverse scientific domains for data analysis and predictive model development. In the field of radiation protection, ML offers substantial advantages over traditional approaches in terms of cost, computation time, and complexity, particularly in dose estimation and shielding design processes.

In this study, the applicability of ML algorithms for predicting radiation dose values at various distances within a tunnel system designed to attenuate secondary neutrons generated under abnormal operating conditions of proton accelerators at 250 and 1000 MeV energy regions was investigated. The performance of the developed ML models was evaluated against reference results obtained from FLUKA Monte Carlo simulations. Linear Regression, Gradient Boosting Regressor, KNN Regressor and Random Forest algorithms were employed, and the results indicated that these methods achieved high prediction accuracy ($R^2 \approx 0.85\text{--}0.98$) for dose distributions while significantly reducing computation time compared to Monte Carlo simulations. The findings demonstrate that ML-based models can provide reliable predictions across different material, environment and energy combinations, thereby accelerating the design process and offering cost-effective solutions that contribute to enhancing safety levels in nuclear facilities.

Keywords: *High - energy neutron, Monte Carlo simulation, FLUKA, Machine Learning, Linear Regression, Random Forest, Gradient Boosting Regressor*

✉ *Corresponding Author Email: demet.sariyer@cbu.edu.tr*

Abs. No:240

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Contribution to the study of the chemical composition and
antioxidant activity of propolis from two regions in northern
Algeria**

**Nour el yakine YAHA^{1✉}, Akila BOUSTA¹, Sabah BRAHMI¹, Mohammed Salah
BOUKHECHEM²**

¹*University of health sciences, faculty of pharmacy, Algiers .Algeria*

²*Higher Normal School of Kouba, Algiers .Algeria*

ABSTRACT

Propolis is a by-product of the beehive, collected by bees, whose composition differs according to several factors.

The aim of this work is to draw up a phytochemical profile of Algerian propolis. The two samples used in this study come from two different regions of northern Algeria, namely Constantine (Ain annhasse) and Bouira (Chorfa).

Phytochemical screening of propolis extracts revealed the existence of alkaloids, polyphenols, flavonoids, coumarins, catechols, and anthraquinones in both samples.

Quantitative analysis of total polyphenols and flavonoids by the Folin-Ciocalteu and aluminium trichloride methods respectively on 70% ethanolic extracts gave higher levels with the Constantine sample. The contents were 107.17 ± 19.02 / 74.18 ± 9.20 $\mu\text{g CE/mg}$ extract for total polyphenols and 64.01 ± 2.3 / 25.42 ± 9.18 $\mu\text{g RE/mg}$ extract for flavonoids.

The antioxidant activity has been demonstrated and evaluated with the standard DPPH free radical scavenging power test using methanolic extracts of propolis, the values were 201, 05 and 202, 59.

Keywords: *propolis, phytochemical screening, flavonoids, polyphenols, antioxidant activity*

✉ *Corresponding Author Email* : *ney.yaha@univ-alger.dz*

Abs. No:254

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Numerical methods used in fire-protection simulations – a
review**

Dr. Jana LIPKOVSKI^{1✉}, Prof. Dr. Aleksandar LIPKOVSKI²

¹ *Institute for Improvement of Education, Belgrade-SERBIA*

² *University of Belgrade, Faculty of Mathematics, Belgrade-SERBIA,*

ABSTRACT

Introduction

The most hazardous threat to life and health of inhabitants and the firefighters in the means of fire accidents is the spreading of smoke, as various studies have shown. Smoke contains toxic materia (carbon monoxide, cyanide, etc.) that block oxygen use in the body and cause loss of conciousness, making the evacuation impossible - with a fatal outcome for the fire victim in a very short period of time.

Governing equations and solving methods

The governing equations that have to be solved numerically, are equations of fluid dynamics (Navier-Stokes or RANS Equation), often coupled with models for heat transfer (radiation), turbulence, combustion and others.

The solving techniques, that are commonly used are Finite Difference (FDM), Finite Element (FEM) and Finite Volume Method (FVM). These methods discretize the simulation space into a grid and approximate the solutions of the governing equations at each point based on values of the neighboring grid cell.

Results

The accuracy is significantly impacted by the size of the grid. However, the size of the grid impacts also the time needed to compute the simulation, which effects the cost. Boundary conditions (including the model of the building with all the relevant fire spreading details) have to be modelled carefully and with full understanding of fire protection elemets (various openings, ventilation shafts, smoke exhaustion, etc) and fire spreading. The chosen numerical method can offer better solving stability, but can require more computation, or on the contrary increase the accuracy or shorten the computation. Some examples of the calculation will be presented.

Discussion

Numerical methods mentioned above provide a powerful tool to predict smoke behavior in complex buildings or enviroment (stadiums, plants, etc.), leading to better fire safety practices and more predictable fire spreading behaviour. They provide a valuable tool for studying fire dynamics and smoke behaviour.

Keywords: *fire protection, warm smoke simulation, numerical methods, fluid dynamics*

✉ *Corresponding Author Email*

jana.lipkovski@zuov.gov.rs

**Microcontroller-Guided DIBH Phantom: A Low-Cost
Training Tool for Patient Positioning in Radiotherapy**

**Besnik SARAMATI^{12✉}, Burim UKA¹³, Fesal SELIMI¹, Behar RACI¹, Labint
KASTRATI¹⁴**

¹*University Clinical Center of Kosova, Oncology Clinic, Prishtina-KOSOVA*

²*University of Prishtina "Hasan Prishtina", Department of Paramedical Subjects, Prishtina-KOSOVA*

³*University of Business and Technology, Department of Medical Sciences, Prishtina-KOSOVA*

⁴*University of Mitrovica "Isa Boletini", Department of Mechanical Engineering, Mitrovica-KOSOVA*

ABSTRACT

Today, Interactive Phantoms are not only necessary but also indispensable. The advanced Deep Inspiratory Breath Holding (DIBH) treatment technique is now a clinically important technique in radiotherapy, which is particularly used to minimize cardiac exposure during the treatment of left-sided breast cancer. Mastering the positioning of the patient treated with DIBH is of particular importance and is a challenge in medical physics education due to the lack of practical training tools. The study presents the design and development of an interactive 3D printed phantom that realistically simulates the movement of the anatomical thoracic area during DIBH, and this by integrating with microcontroller-based sensors and actuators to reflect the dynamics of chest rise and breath hold. The phantoms interpret real-time feedback through sound sensors, servomotors, and various visual indicators, allowing students to observe and adjust the accuracy of positioning. The study reflects that the low cost of creating interactive phantoms advances the teaching of the principles of DIBH and patient positioning in radiotherapy, also demonstrating maximum student engagement, resulting in improved conceptual understanding and potential for broader application in academic-clinical settings.

Keywords: DIBH Simulation, Microcontrollers, Patient Positioning.

✉ *Corresponding Author Email: besniksaramati@gmail.com*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Glioblastoma Multiforme: Case Report, Treatment, and
Prognosis**

**Behar RACI¹, Besnik SARAMATI^{12✉}, Burim UKA¹³, Snezana STOJOVSKA⁴, Igor
STOJOVSKI⁵, Arta KAMERI JUSUFI, Ilir AHMETXHEKAJ¹, Meleq BAHTIJARI²,
Gezim HODOLLI⁷, Violeta KLISAROVSKA⁵, Labinot KASTRATI¹⁴, Hekuran
SEJDIU¹**

¹*University Clinical Center of Kosova, Oncology Clinic, Prishtina - KOSOVA*

²*University of Prishtina "Hasan Prishtina", Department of Paramedical Subjects, Prishtina -
KOSOVA*

³*University of Business and Technology, Department of Medical Sciences, Prishtina - KOSOVA*

⁴*University of Mitrovica "Isa Boletini", Department of Mechanical Engineering, Mitrovica -
KOSOVA*

⁵*University Clinic of Radiotherapy and Oncology, Faculty of Medicine, Skopje - NORTH
MACEDONIA*

⁶*University Clinic for Infectious Diseases & Febrile Conditions, Faculty of Medicine, Skopje -
NORTH MACEDONIA*

⁷*University of Prishtina "Hasan Prishtina", Faculty of Veterinary and Agriculture, Prishtina –
KOSOVA*

ABSTRACT

Glioblastoma multiforme (GBM) is the most aggressive glial neoplasm of the central nervous system, with a median survival of less than one year despite existing therapies. We discuss the case of a 66-year-old woman exhibiting diplopia, dizziness, and numbness, in whom MRI revealed a 52x43 mm lesion in the left occipital lobe. This qualitative study, performed in the Oncology Clinic of the University Clinical Centre of Pristina from 2018 to 2023, examined MRI data and treatment outcomes. The patient underwent 3D conformal radiation and temozolomide for 60 months, resulting in a substantial extension of survival. The findings indicate that contemporary techniques like IMRT, SRT, and SRS may enhance outcomes for GBM patients.

Keywords: *Glioblastoma multiforme, case report, radiation therapy*

✉ Corresponding Author Email: besniksaramati@gmail.com

The Potential and Difficulties of Using 3D Printing to Create Vaginal Applicators for Brachytherapy

**Burim UKA^{1,3✉}, Polikron DHOQINA², Gëzim HODOLLI⁴, Sehad KADIRI^{3,5}, Labinot
KASTRATI⁶**

¹ *University for Business and Technology (UBT), Faculty of Medical Sciences, Prishtina-Republic of
Kosova*

² *University of Tirana, Faculty of Natural Sciences, Tirana, Albania*

³ *University Clinical Center of Kosova, Prishtina-Republic of Kosova*

⁴ *University of Prishtina, Faculty of Agriculture and Veterinary Medicine, Prishtina-Republic of
Kosova*

⁵ *AAB College, Faculty of Medical Sciences, Prishtina-Republic of Kosova*

⁶ *University "Isa Boletini", Faculty of Mechanical and Computer Engineering, Mitrovica-Republic of
Kosova*

ABSTRACT

The anatomical modification of vaginal applicators in the field of brachytherapy is now more than essential for the purpose of efficient dose delivery and not only. The creation of 3D applicators provides great results as a key tool for the personalization of oncological therapies.

This literature review reflects on the benefits and difficulties of the clinical adaptation of the creation of 3D vaginal applicators. The analysis of the literature on 3D vaginal applicators demonstrates that they offer superior coverage of the target volume while reducing exposure to sensitive organs in comparison with conventional ones. It is reflected that the role of physics and medical physicists is fundamental in this path, including dosimetry verification, quality control, and adaptation of the design to the required clinical parameters. The remaining challenges are sterilization, biocompatible material solutions, and the lack of standardization, and not only that. According to international criteria (ESTRO, AAPM), the procedures and verification of clinical application cannot be overlooked. Gynecological brachytherapy is emerging through the potential of medical physicists and the printing of 3D gynecological applicators as a guarantee for ensuring safety and increasing effectiveness, but more study, validation, and practical standardization are still required.

Keywords: *3D printing, vaginal applicators, brachytherapy, medical physics, dosimetry, quality assurance, personalization, gynecological cancer*

✉ *Corresponding Author Email:* *burim.uka@hotmail.com*

Abs. No:263

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Optical Performance and Clinical Relevance of CAD/CAM
Ceramic Materials**

Fisnik ALIAJ¹, Suela HOXHA^{2☒}, Teuta PUSTINA-KRASNIQI², Mirlind QERIMI³

¹ *University of Pristina, Faculty of Mathematical and Natural Sciences, Department of Physics, Kosovo*

² *University of Pristina, Faculty of Medicine, Department of Prosthodontics Dentistry, Kosovo*

³ *Dental Studio, Ferizaj, Kosovo*

ABSTRACT

The continuous evolution of CAD/CAM technology has enriched the selection of restorative materials, providing improved mechanical durability and enhanced optical performance. This in vitro study aimed to compare the translucency and opalescence across three monolithic zirconia systems, a polymer-infiltrated hybrid ceramic, and a lithium disilicate glass-ceramic used as a group control. Uniform specimens (14 × 12 × 1 mm, shade A2) were examined with the Vita Easyshade V spectrophotometer following the CIELAB color protocol. The results revealed pronounced variations among the groups: lithium disilicate demonstrated the most favorable optical properties, the hybrid ceramic exhibited intermediate performance, while zirconia specimens showed a progressive reduction in translucency and opalescence depending on their grade. From a clinical standpoint, these outcomes underscore the importance of material-specific indications. Lithium disilicate remains the material of choice for restorations in highly esthetic regions, hybrid ceramics represent a balanced alternative between optical quality and strength, whereas zirconia, despite its lower translucency, is particularly suitable for posterior areas where functional resilience is prioritized. Overall, the study highlights that aligning the intrinsic properties of ceramic materials with clinical demands is crucial to ensure both aesthetic excellence and long-term restorative success.

Keywords: *CAD/CAM, esthetics, zirconia, hybrid ceramics, translucency, opalescence*

☒ *Corresponding Author Email* : suela.hoxha3@student.uni-pr.edu

Abs. No:271

Validation of the individual monitoring system for radiation workers through intercomparison tests

Gezim HODOLLI^{1,2}, Sehad KADIRI^{1,3,4}, Burim UKA⁴, Labinot KASTRATI^{4,5,✉}

¹ *Institute of Occupational Medicine, Kastriot-KOSOVA,*

² *Faculty of Agriculture and Veterinary, University of Pristina, Prishtina-KOSOVA,*

³ *AAB college, Prishtina-KOSOVA,*

⁴ *Clinic of Oncology, University Clinical Center of Kosova, Prishtina-KOSOVA,*

⁵ *University "Isa Boletini", Mitrovica-KOSVOA,*

ABSTRACT

Individual monitoring of external exposure for radiation workers is required under national and international laws. Individual monitoring began in Kosovo in 1978 and lasted until 1982, when film dosimeters were used to create the first systematic dosage records for radiation workers. Following that, the monitoring system was modified with thermoluminescent dosimeters (TLD-100), which enhanced dosage assessment accuracy and reliability, particularly for personal dose equivalent $H_p(10)$ and $H_p(0.07)$.

This study discusses how quality assurance is achieved by regularly verifying the TLD system with reference irradiations from ISO-accredited laboratories and participating in EURADOS intercomparisons tests. In these blind tests, dosimeters are irradiated at different doses, energies, and angles, and the reported values are compared to reference doses to determine accuracy using trumpet curves.

Recent intercomparison findings indicate that Kosovo's monitoring service fulfills international acceptability standards. This study illustrates how the setting up of TLD-based monitoring, along with rigorous validation and international comparisons, resulted in high-quality dosimetric data and compliance with European radiation safety regulations in Kosovo.

Keywords: *Radiation, exposure, TLD-100, Keywords 2, Keywords 3*

✉ *Corresponding Author Email* : *labinot.kastrati@umib.net*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Microbiological safety of artisanal honey: Detection of *C. botulinum* and other bacteria in Kosovo

Hamdi ALIU^{1,✉}, Zeynep Dengiz BALTA², Rreze GECAJ¹, Salih KUMRU², Fikir BALTA², Arben SINANI¹

¹ *Faculty of Agriculture and Veterinary, University of Pristina, 10000 Pristina, Kosovo*

² *Faculty of Fisheries, Recep Tayyip Erdogan University, 53 100 Rize, Turkey*

ABSTRACT

Honey is widely consumed for its nutritional and therapeutic value, yet it may harbor microbial contaminants of public health concern. This study investigated the occurrence of *Clostridium botulinum* and other bacteria in polyfloral honey from small-scale artisanal producers across Kosovo. Twenty-seven geographically distributed samples were collected between July and September 2023 to provide representative national coverage.

Bacteria were isolated using direct centrifugation and enrichment culture, characterized by Gram staining, catalase and oxidase tests, and identified by 16S rRNA gene amplification with universal primers, followed by sequencing and phylogenetic analysis. Eleven samples (41%) exhibited ~96% sequence identity with *C. botulinum*. Thirteen samples (48%) showed ~99% identity to *Bacillus* spp. (including *B. licheniformis*, *B. cereus* group, and *B. subtilis*), while *Staphylococcus saprophyticus* (~98%), *Alcaligenes faecalis* (100%), and *Paenibacillus dendritiformis* (~99%) were each detected in one sample. To our knowledge, this is the first comprehensive survey of *C. botulinum* in honey from Kosovo.

The relatively high detection rate of *C. botulinum*, together with frequent recovery of other spore-forming and opportunistic bacteria, underscores potential food-safety risks particularly for infants vulnerable to botulism. These findings support the need for continuous microbiological monitoring, improved hygienic practices along the production chain, and targeted consumer education to minimize health risks and inform national food-safety policies for artisanal honey.

Keywords: *honey, Clostridium botulinum, Poliflorar, artisanal, 16S rRNA*

✉ Corresponding Author Email : hamdi.aliu@uni-pr.edu

Abs. No:278

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Determination of Physico-Chemical Properties and Heavy
Metals Lead (Pb), Cadmium (Cd), Aluminum (Al), Nickel
(Ni), and Chromium (Cr) in Cabbage Cultivated in the
Region of Prishtina and Prizren.**

Esad Behrami¹✉, Ditjona Shala¹, Blerina Kollani¹

*¹ University of Prishtina, Faculty of Agriculture and Veterinary Medicine, Department of Food
Technology, Prishtina, Kosovo*

ABSTRACT

The work aims to determine the physicochemical properties and heavy metals lead (Pb), cadmium (Cd), aluminum (Al), nickel (Ni), and chromium (Cr) in cabbage cultivated in the regions of Prishtina and Prizren. The impact of heavy metals on agricultural products is an important public health concern, as these elements can accumulate in the human body through the consumption of contaminated food. Sampling was conducted in October and November 2024. Cabbage samples were collected from different areas within the municipalities of Prizren and Prishtina, then processed and analyzed using standard analytical methods. The analyses were performed at the laboratory of the Faculty of Agriculture and Veterinary Medicine. Results were obtained using Inductively Coupled Plasma Optical Emission Spectroscopy (ICP/OES), an analytical technique used to measure heavy metals in each sample. The findings revealed significant variations in the concentrations of Pb, Cd, Al, Cr, and Ni, highlighting the contamination's impact on food safety. Comparing these levels with limits set by international standards for food products provides insight into the risks associated with consuming cabbage from these regions. This study enhances understanding of heavy metal contamination in crops and emphasizes the importance of regular monitoring of food products and agricultural land to protect consumer health.

Keywords: *physicochemical properties, cabbage, heavy metals.*

✉Corresponding Author Email: esat.behrami@uni-pr.edu

Abs. No:282

VALORIZATION OF FARMING WASTE IN A COMPOSITE MATERIAL: MECHANICAL CHARACTERIZATION

Nourdine OUALI^{1✉}, Fatma Zohra SI SALAH², Mahrez SAADEDINE¹, Nacira NAAR²

¹ *Laboratoire de Mécanique Avancée, Université des Sciences et de la Technologie Houari Boumediene, Faculté de Génie Mécanique et Génie des Procédés, Algiers-ALGERIA*

² *Laboratoire Laboratoire des Matériaux Macromoléculaires et d'Ingénierie Biomoléculaire macromoléculaire de synthèse, Université des Sciences et de la Technologie Houari Boumediene, Faculté de Chimie, Algiers-ALGERIA*

ABSTRACT

Polymeric materials are known for the wide range of their properties, which in practice translates into several application possibilities. Another feature that highlights the importance of polymers is the possibility of chemical or physical structural modification, such as dissolution, the addition of additives and reinforcements (composites), and so on. In recent years, research has focused on valorizing farming waste in polymer materials to produce composite materials by various methods. The effect of adding particles (fillers) on abrasion wear has been studied ; these fillers can increase the shear resistance or the cohesion characteristics of the resulting composite material. Other authors have shown that factors affecting the properties of composites containing natural fillers include particle size, morphology, surface properties, and especially their concentration in the material.

This study focuses on the incorporation of date pit flour into a PVC matrix composite with different filler contents of 10%, 20%, 30%, and 40% by weight. The corresponding composites were prepared from a thermoplastic resin (PVC) and date pit flour by calendaring and compression molding processes to improve the mechanical properties of the composite. The resulting composites, manufactured with various formulations, were then mechanically characterized to determine their mechanical properties. Analysis of the experimental results allowed us to draw the following conclusions:

- With the increase of untreated date pit flour content, both the stress and elongation at break decrease, while the elastic modulus and hardness progressively increase.
- However, a 20% filler content of date pit flour shows better improvement than the other composite formulations.

Keywords: *thermoplastic resin, date pit flour, composite materials, mechanical characterization.*

✉ Corresponding Author Email

: nourdine.ouali@usthb.edu.dz

Development and optimization of a smart wearable sensor for monitoring cardiac and respiratory signals

Fatima Brik^{1✉}, Karima Boukari¹, Zahia Khaldouna¹, Mahmoud Taibi¹

Badji Mokhtar-Annaba University, Department of Electronics P.O. Box 12, Annaba 23000, Algeria

¹ *Laboratory of LERICA, Department of Electronics, Badji Mokhtar-Annaba University P.O. Box 12, Annaba 23000, Algeria*

ABSTRACT

The integration of optical fiber sensors, such as Fiber Bragg Gratings (FBGs), with advanced manufacturing techniques has opened new horizons in biomedical monitoring. This study focuses on the development and optimization of a smart wearable sensor for cardiac and respiratory signal monitoring, leveraging the unique advantages of FBGs. The design incorporates simulations using coupled-mode theory to analyze the impact of opto-geometric parameters such as grating period, length, and refractive index contrast on sensor sensitivity. Additionally, the combination of FBGs with 3D-printed encapsulation structures is explored to enhance sensor performance and adaptability. Finite-element analysis was employed to optimize strain localization and interface bonding between the fiber and encapsulation material, ensuring robust spectral responses under mechanical and thermal loads. The resulting system, characterized by its miniaturization, electromagnetic insensitivity, and customizable design, was validated in pilot tests for respiratory and cardiac rate monitoring through chest wall deformation detection. The findings highlight the potential of FBG-based wearable sensors as cost-effective and high-precision tools for real-time physiological monitoring, paving the way for next-generation biomedical applications.

Keywords: *FBG , finite-element analysis, cardiac and respiratory signal*

✉ Corresponding Author Email : Fatima.brik@univ-annaba.dz

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Risk Management in Islamic Financial Systems: Alignment
with International Standards**

Mohammadreza Shahbazicholoo [✉]

*PhD Candidate in Industrial Engineering (Operations Research and Systems Engineering), Islamic
Azad University, Tehran Central Branch, Tehran-Iran*

ABSTRACT

Islamic financial systems, grounded in Shariah principles, face a unique set of risks—including Shariah risk, liquidity risk, operational risk, and regulatory compliance risk. These risks, stemming from the non-interest-based nature and participatory contracts of Islamic banking, require specialized management frameworks.

The aim of this study is to design and validate an institutional reform model for Islamic banks, with a focus on managing Shariah, operational, and financial risks. Using Structural Equation Modeling (SEM), the causal relationships among supervisory structure, managerial training, analytical tools, and financial performance were examined. Data were collected from four countries—Iran, Malaysia, Bahrain, and the United Arab Emirates—and analyzed using applied-analytical methodology through AMOS and R software. The alignment of these systems with international standards such as Basel III and IFRS was also assessed.

Findings indicate that independent supervisory structures and specialized managerial training play a significant role in mitigating institutional risks. The path from Shariah risk to financial performance showed a significant negative coefficient, confirming the critical role of Shariah compliance in sustaining financial stability. Complementary tests—including Bootstrap, Sobel, sensitivity analysis, and multi-group modeling—confirmed the statistical and comparative validity of the proposed model. Finally, the study offers recommendations for enhancing Shariah governance, standardizing financial reporting, and designing a framework for evaluating Shariah-based performance.

Keywords: *Islamic Banking, Shariah Risk, Structural Equation Modeling (SEM), Shariah Supervision, Financial Performance*

[✉] *Corresponding Author Email: mr.shahbazi@ut.ac.ir*

Abs. No:207

**Chemical study and valorization of the essential oil of
Teucrium polium L. as a bioactive material for the
development of a natural pharmaceutical formulation with
anti-inflammatory purposes**

Sabrina. Benmebarek ^{1✉}, Nadia Djouambi ¹, Salima. Bacha ¹, Imed Eddine
Benmebarek ^{2,3}, Bouzid Omar Boussaha ¹, Aicha Beya Mammeria ¹

¹ Materials and Environmental Sciences Laboratory, Faculty of Science, Department of Material
Science, University of Algiers1, Algeria.

² Department of Organic Chemistry, Faculty of Chemical Sciences and Technologies,
University of Castilla-La Mancha, 13071 Ciudad Real, Spain

³ LOMOP. Bio-Organic Synthesis and Modeling Group. UBM. BP 12 El-Hadjar. Annaba
23000. Algérie.

ABSTRACT

Context: Essential oils extracted from medicinal plants are natural bioactive materials of great interest for pharmaceutical research, thanks to their multiple therapeutic properties. *Teucrium polium* L. (Lamiaceae family), a plant long used in traditional medicine for its healing, anti-inflammatory, antioxidant and antibacterial properties, is distinguished by its richness in bioactive compounds such as flavonoids and tannins. This study aims to enhance and characterize the essential oil from *Teucrium polium* L., considered as a bioactive material for the development of a natural pharmaceutical formulation with anti-inflammatory properties. **Methods:** The essential oils were extracted by hydrodistillation and appear as complex mixtures primarily composed of terpenoid compounds, including monoterpenes, sesquiterpenes, and, to a lesser extent, diterpenes. They may also contain other molecules such as acids, alcohols, aldehydes, esters, acyclic aliphatic hydrocarbons, and lactones; more rarely, nitrogen and sulfur compounds, coumarins, and phenylpropanoid derivatives are also present. The chemical profile of the essential oil of *Teucrium polium* L. (Lamiaceae family) was determined by gas chromatography-mass spectrometry (GC-MS). Furthermore, the antimicrobial activity was assessed using the microdilution method. **Results:** GC-MS chromatographic analysis revealed a complex chemical composition, dominated by monoterpenes and sesquiterpenes. The main constituents identified include verbenone (3.46%), terpenyl acetate (4.14%), and valencene (4.84%). These compounds are likely to explain the observed biological activities, including anti-inflammatory and healing properties. Furthermore, the cream formulated with this essential oil has shown promising potential as a natural pharmaceutical device for the treatment of inflammation and skin lesions. **Conclusions:** *Teucrium polium* L. essential oil is distinguished by its chemical composition rich in monoterpenes and sesquiterpenes, as well as by its proven

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

pharmacological activities. These characteristics make it a promising bioactive material in the field of natural materials chemistry. Its valorization in the form of a natural pharmaceutical formulation with anti-inflammatory effects represents an innovative strategy, combining therapeutic efficacy and biodiversity preservation.

Keywords: *Teucrium polium L., GC-MS analysis, chemical composition, anti-inflammatory activity, pharmaceutical formulation, bioactive materials, valorization, bioeconomy.*

✉ Corresponding Author Email : s.benmebarek@univ-alger.dz

Biogenic Synthesis and Characterization of Zinc Oxide and Titanium Dioxide Nanoparticles Mediated by Plant Extracts

Sabrina. Benmebarek^{1✉}, Nadia Djouambi¹, Salima. Bacha¹, Imed Eddine Benmebarek^{2,3}, Bouzid Omar Boussaha¹, Aicha Beya Mammeria¹

¹ *Materials and Environmental Sciences Laboratory, Faculty of Science, Department of Material Science, University of Algiers1, Algeria.*

² *Department of Organic Chemistry, Faculty of Chemical Sciences and Technologies, University of Castilla-La Mancha, 13071 Ciudad Real, Spain*

³ *LOMOP. Bio-Organic Synthesis and Modeling Group. UBM. BP 12 El-Hadjar. Annaba 23000. Algérie.*

ABSTRACT

Context: Nanotechnology, a multidisciplinary field involving physics, chemistry, and biology, offers major applications in biomedicine and dentistry due to the unique properties of nanomaterials. The green synthesis of nanoparticles (NPs), particularly from plant extracts, is a sustainable approach with advantages in terms of biocompatibility and reduction of harmful effects. Metal oxide nanoparticles, such as ZnO and TiO₂, are distinguished by their photocatalytic, magnetic, and antimicrobial properties due to their small sizes and large specific surface areas. In this study, ZnONPs and TiO₂ NPs were synthesized using aqueous extracts of clove and olive leaves with a zinc salt (Zinc Nitrate) as pioneers and titanium dioxide due to its ability to catalyze chemical reactions and its efficiency in removing contaminants from the environment.

Materials and methods: Different experimental techniques are used for the preparation, characterization and analysis of these nanoparticles, highlighting the ecological approach adopted in their synthesis. X-ray diffraction (XRD), infrared spectroscopy (FTIR), UV-visible spectroscopy, surface area determination analysis (BET) and X-ray fluorescence (XRF) were used to characterize the optical, chemical, crystalline, textural and elemental properties of the formed nanoparticles.

Results: The green synthesized ZnONPs and TiO₂NPs were initially confirmed using a UV-visible spectrophotometer. This technique was used to evaluate the optical properties of the nanoparticles and estimate the band gap size. The analysis allowed us to compare the absorption bands of the two types of nanoparticles, which eliminated interferences due to the solvent or the reference substrate, and to obtain an accurate absorption spectrum of the studied nanoparticles. Other analyses were carried out on these nanoparticles such as infrared (IR) spectroscopy analysis which allowed us to identify the functional groups involved in the stabilization of the nanoparticles. X-ray diffraction (XRD) was used to determine the crystal structure and crystallite size of the nanoparticles. The Brunauer–Emmett–Teller (BET) technique was used to measure the specific surface area of nanoparticles, a crucial data for catalytic and absorptive applications. The antimicrobial activity was tested for TiO₂ and ZnO nanoparticles synthesized from plant extracts against two bacterial strains: *Staphylococcus aureus*, *Escherichia coli*. Titanium dioxide nanoparticles showed the best overall efficacy against Gram-positive and Gram-negative bacteria while ZnO nanoparticles

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

showed fair efficacy, but lower than TiO₂ in the majority of cases. **Conclusion:** The study of antimicrobial activity highlighted a notable efficacy, in particular for TiO₂ nanoparticles associated with olive leaf and clove extracts, demonstrating a strong inhibitory power on *Staphylococcus aureus* and *Escherichia coli*.

Keywords : *Nanoparticles, green synthesis, UV-visible spectroscopy, FTIR, XRD, BET, XRF, antimicrobial activity, product development, environmental civilization.*

✉ Corresponding Author Email : s.benmebarek@univ-alger.dz

Abs. No:270

Electrical Resistivity and Minority Carrier Lifetime Distribution in Directional Solidification of Silicon Ingot

Fouad KERKAR[✉], Djamel OUADJAOUT¹, Nabil KHELİFATİ¹

¹*Centre de Recherche en Technologie des Semiconducteurs pour l'Energétique (CRTSE), Alger,
ALGERIA,*

2 Bd Frantz Fanon BP n° 140 - 7 Merveilles

ABSTRACT

In this work, the electrical wafer qualities were studied through resistivity and minority carrier lifetime variation, as a function of wafer position. The silicon ingot is grown with directional solidification by Heat Extract Method (HEM). The solid-liquid interface moves upwards from the bottom to top of the crucible. The growth rate is controlled to favour the growth of a high quality crystal structure by adjusting the position of the heat exchanger bloc and the heater power. The target is to obtain vertically aligned grains which confirm a good directional growth. This analysis was investigated using a quasi-stationary photo conductance QSSPC technique and four probe technique. The ingot produced has shown the good uniform large grain with vertically-oriented grain boundaries.

The resistivity for corner and center brick's present a maximum value of 2.3 $\Omega \cdot \text{cm}$ and 1.69 $\Omega \cdot \text{cm}$ respectively, after 50% of growth rate and minimal value in the first and final stage of solidification. In the initial growth rate, the initial lifetime value is 3.23 μs and 3.96 μs for corner and center bricks respectively. Both lifetimes value grow to the maximum value with 8.55 μs and 14.05 μs for corner and center of bricks respectively. The variation of electrical resistivity is probably affected by the impurity concentration and grain structure. The lifetime results are affected by the structural defected and grain morphology..

Keywords: *Silicon ingot, Directional solidification, Heat exchange method, Lifetime, Growth rate*

✉ Corresponding Author Email : kerkarfouad@crtse.dz

Abs. No:274

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Nickel Zinc thin film for Hydrogen production

**Samy ANAS^{1✉}, Naima ZAOURAR BOUTAREK¹, Samir MANSOUR¹, Faouzi
MESSAOUD¹, Sofiane LATRECHE¹, P DAVID² and E. MOSSANG²**

¹*University of Sciences and Technology Houari Boumediene USTHB, Laboratory of Materials
Technologies. B.P. 2 El Alia, Bab Ezzouar, Alger, Algeria*

²*Institut Néel, CNRS UPR2940, 25 avenue des Martyrs BP 166 38042 Grenoble cedex 9*

ABSTRACT

By serving as a catalyst and boosting reaction efficiency in procedures like water electrolysis, biomass gasification, and photochemical reactions, nickel based component plays a crucial part in the production of hydrogen.

The purpose of this work was to use the Magnetron Sputtering technology to develop nickel-zinc thin films on a stainless steel substrate.

Scanning electron microscopy, optical profilometer, optical microscopy, X-ray diffraction, and the electron probe microanalyser (EPMA) were used to examine the surface morphology, crystal structure, and chemical composition of the Ni-Zn thin films.

The chemical activation of the electrode was achieved in an alkaline solution.

The hydrogen evolution reaction was shown to be enhanced with temperature and activation in the performance and stability tests conducted with and without an active electrode.

Keywords: *Nickel/Zinc, characterization, water splitting, hydrogen production.*

✉ *Corresponding Author Email* : ansamy2003@gmail.com

Abs. No:268

Bismuth oxide electrode for CO₂ conversion application

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

S. Anas Boussaa^{1,2✉}, K. Benfadel¹, L. Talbi¹, Y. Ouadah¹, A. Boukezzata¹, A. Trade khodja¹, D. Allam³, S. Hocine³, A. Manseri¹, N. Zaourar Boutarek², B. Hamdoud¹ and S. Kaci¹

1 Research Center On Semiconductor Technology for Energetic, 2 BD Frantz Fanon, 7 merveilles, POB 140, Algiers, Algeria

2 University of Sciences and Technology Houari Boumediene USTHB, Laboratory of Materials Technologies. B.P. 2 El Alia, Bab Ezzouar, Alger, Algeria.

3 University Mouloud Mammeri of Tizi Ouzou, Laboratory of Applied Chemistry and Chemical Engineering, Sciences Faculty, LCAGC-UMMTO, Tizi Ouzou, Algeria

ABSTRACT

For the active and selective electroreduction of CO₂ to formate and formic acid, bismuth is a potential electrocatalyst.

In the present work, an electrode based on bismuth oxide /carbone /pvdf composite was synthesized.

Scanning electron microscopy (SEM) was used to examine the films' morphology, while x-ray photoelectron spectroscopy (XPS) and Fourier transform infrared spectroscopy (FTIR) were used to examine their structure. Next, these films' stability and electrocatalytic activity in relation to CO₂ electroreduction in aqueous solution were evaluated.

Keywords: *bismuth oxyde, CO₂, conversion, formate.*

✉ Corresponding Author Email : sabiha.anas@gmail.com; anassabiha@crtse.dz

Abs. No:269

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Processing of recovery Si down to purified Si powder from
SIREVIVAL PROJECT**

**Sabiha ANAS BOUSSAA^{1,2✉}, Abdallah TRAD KHODJA¹, Messaouda AYACHI¹,
Abderrahmane NAAS¹, Samy ANAS², Fatima BOUDEFFAR¹, Rabia RAHMOUNE¹, Bilal MERAZKA¹**

*1 Research Center On Semiconductor Technology for Energetic, 2 BD Frantz Fanon, 7 merveilles,
POB 140, Algiers, Algeria*

*2 University of Sciences and Technology Houari Boumediene USTHB, Laboratory of Materials
Technologies. B.P. 2 El Alia, Bab Ezzouar, Alger, Algeria.*

ABSTRACT

With rapidly increasing production and installation of photovoltaic panels, recycling of PV modules has become the main issue. In this study, we developed pure silicon powder from EOL panel.

The process is divided into three parts, organic solvents soaking and thermal treatment to eliminate EVA.

In the second part, the recovered silicon from EOL panel was purified and characterized by SEM, EDS and XPS spectroscopy.

Finally, the pure silicon was reduced to powder using Mortar Grinder RM 200 and a planetary Ball Mills PM 200 and its granulometric parameters were study by Laser.

Keywords: *End of life, silicon, purification, powder.*

✉ Corresponding Author Email : sabiha.anas@gmail.com anassabiha@crtse.dz

Abs. No:235

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Strengthening Radiation Safety Education in the Pre-
Internship Health Associate Degree Curriculum**

Halil SOYAL^{1✉}

¹ *Istanbul Okan University, Strengthening Radiation Safety Education in the Pre-Internship Health
Associate Degree Curriculum, Istanbul-TURKEY*

ABSTRACT

Purpose: The purpose of this study was to evaluate the impact of radiation safety training administered during the pre-internship period on the knowledge and awareness of students in associate degree programs in health sciences. Increasing radiological practice requires students to effectively learn basic radiation safety principles before beginning their professional careers.

Method: The study employed a quasi-experimental (pretest-posttest) design. The study group consisted of 186 students enrolled in associate degree programs in health sciences at a university in Turkey. Participants received a training program that included additional radiation safety modules in addition to the standard curriculum. Pre- and post-training knowledge levels were measured using a 20-question test and a structured questionnaire covering radiation safety principles, exposure reduction methods, and the use of personal protective equipment. Data were analyzed using a dependent samples t-test.

Findings: The mean knowledge score before the training was $42,3 \pm 11,5$, and after the training, this score increased to $78,7 \pm 9,8$, and the difference was found to be statistically significant ($p < 0,001$). 82% of students stated that the additional training provided significantly contributed to their pre-internship preparation process, and 76% stated that it increased their awareness of the use of personal protective equipment.

Conclusion: Strengthening radiation safety education before internship significantly increases the occupational safety and awareness levels of associate degree health students. These findings support the need for a stronger integration of radiation safety education into the curriculum.

Keywords: *Radiation Safety, Radiation Protection, Associate Degree Education, Radiation Training*

✉ *Corresponding Author Email* : *aydefen@gmail.com*

Abs. No:236

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**Internal Radiation Alarm: Safety Awareness in Future
Healthcare Workers**

Halil SOYAL^{1✉}, Mucize SARIHAN¹

¹ *Istanbul Okan University, Strengthening Radiation Safety Education in the Pre-Internship Health
Associate Degree Curriculum, Istanbul-TURKEY*

ABSTRACT

Purpose: The aim of this study was to assess the level of radiation safety awareness among healthcare students and to examine the relationship between individual awareness levels, which can be defined as "internal radiation alarms," and professional training processes. Given the widespread use of radiation in healthcare, raising awareness early in future healthcare professionals is critical for both reducing occupational risks and ensuring the sustainability of safe healthcare delivery.

Method: This cross-sectional study was conducted among 170 students enrolled at a health sciences college in Turkey during the spring of 2024. Participants were 68% female (n=116), 32% male (n=54), and the mean age was 20,9±2,1 years. The "Radiation Safety Awareness Scale," adapted from literature, and a sociodemographic information form were used as data collection tools. Data were analyzed using SPSS 25,0, using descriptive statistics, independent samples t-tests, and analysis of variance.

Findings: According to the analysis results, students' general radiation safety awareness was found to be above the average level (mean = 3,78±0,62). Female students' awareness levels were statistically significantly higher than male students (p<0,05). Furthermore, students studying radiology and nursing were found to have developed a higher level of awareness compared to other healthcare programs. Students who received prior training in radiation safety had significantly higher mean scores than those who did not (p<0,01).

Conclusion: The study revealed that future healthcare professionals are beginning to develop safety awareness, a form of internal radiation alert, but this awareness varies across programs. The higher awareness among female students, in particular, indicates the influence of societal and individual factors. It is recommended that radiation safety courses be systematically incorporated into educational programs, simulation-based practices be expanded, and interdisciplinary collaborations be increased. Consequently, raising student awareness early is considered a strategic necessity for both protecting personal health and providing safe healthcare services at the societal level.

Keywords: *Radiation safety, Health students, Occupational risks, Safety culture*

✉ *Corresponding Author Email* : aydefen@gmail.com

Abs. No:246

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**ASSESSMENT OF CANCER PATIENTS' CONCERNS
DURING RADIOTHERAPY: A RADIATION ONCOLOGY
PERSPECTIVE**

Mucize Sarıhan

¹¹Istanbul Okan University, Vocational School of Health Services, Istanbul-TURKEY

ABSTRACT

Radiotherapy is a cornerstone treatment modality in oncology, offering significant therapeutic benefits for various types of cancer. Despite its efficacy, patients undergoing radiotherapy often experience anxiety and concerns related to treatment side effects, procedure complexity, and long-term outcomes. Understanding these concerns is critical for improving patient care, adherence to treatment, and overall quality of life (Smith et al., 2013; Lee et al., 2010).

This study aims to evaluate the perceptions, fears, and expectations of cancer patients regarding radiotherapy. A cross-sectional descriptive design was employed, involving structured interviews and validated questionnaires administered to patients receiving radiotherapy at a tertiary oncology center. Data were analyzed to identify the most common sources of anxiety, including fear of radiation-induced side effects, uncertainties about treatment efficacy, and concerns regarding physical changes and social implications (Patel et al., 2021).

The findings indicate that patients' primary concerns center around potential adverse effects, including fatigue, skin reactions, and organ-specific complications. Psychological stress and lack of sufficient information were also significant contributors to patient anxiety. Effective communication between healthcare providers and patients, individualized counseling, and educational interventions were identified as key strategies to alleviate concerns and improve treatment adherence (Nguyen et al., 2022). Furthermore, the study emphasizes the role of healthcare professionals in addressing ethical and emotional aspects of care. By incorporating patient-centered approaches and ensuring transparent, empathetic communication, oncology

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

teams can enhance patient satisfaction, reduce treatment-related anxiety, and foster trust in the therapeutic process (Khan et al., 2023).

In conclusion, comprehensive assessment and proactive management of cancer patients' concerns regarding radiotherapy are essential components of high-quality oncology care. Integrating educational, psychological, and ethical considerations into routine radiotherapy practice not only improves patient experience but also contributes to optimal clinical outcomes.

Keywords: *Cancer Patients, Radiotherapy, Patient Anxiety, Patient Education.*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

**RADIATION SAFETY AND MANAGERIAL ETHICAL
PRINCIPLES IN HEALTHCARE SERVICES**

¹Mucize Sarihan ²Halil Soyal

¹Okan University School of Health Vocational School/ mucize.sarihan@okan.edu.tr

²Okan University School of Health Vocational School/ halil.soyal@okan.edu.tr

ABSTRACT

Radiation is widely used in modern healthcare for diagnostic, therapeutic, and research purposes. While it provides significant benefits, exposure to ionizing radiation carries inherent risks to patients, healthcare professionals, and the general public. Effective radiation safety management in healthcare institutions is therefore crucial to minimize risks and ensure compliance with national and international regulations (WHO, 2024; IAEA, 2024).

Radiation safety management encompasses principles such as justification, optimization, and dose limitation. Justification ensures that each radiological procedure is medically necessary and beneficial (NCBI, 2023). Optimization, guided by the ALARA (As Low As Reasonably Achievable) principle, aims to minimize radiation exposure. Dose limitation involves adhering to established dose limits to prevent harmful effects (OSHA, 2025).

Beyond technical measures, managerial and ethical considerations play a central role in fostering a culture of safety. Healthcare managers are responsible for implementing protocols that ensure safe usage of radiation, monitoring occupational exposure, providing staff training, and maintaining transparent communication with patients regarding potential risks (WHO, 2022). Ethical principles such as accountability, transparency, beneficence, and non-maleficence guide decision-making in scenarios involving radiation exposure, balancing patient care with staff safety (AMA, 2007).

Keywords: *Radiation Safety, Managerial Ethics, Healthcare*

Abs. No:251

**EVALUATION OF ANXIETY LEVELS IN CANCER
PATIENTS UNDERGOING LONIZING RADIATION
THEARAPY DUE TO SIDE EFFECTS**

¹Aykut KARADEMİR, ²Mucize SARIHAN

¹Istanbul Okan University, Vocational School of Health Services, Istanbul-TURKEY

²Istanbul Okan University, Vocational School of Health Services, Istanbul-TURKEY

ABSTRACT

This study aims to describe the anxiety and psycho-social challenges experienced by cancer patients undergoing radiotherapy due to side effects. The study group consists of cancer patients from a foundation hospital in Istanbul. In determining the study group, one of the purposive sampling methods, convenient sampling, was taken into account. This research was conducted using qualitative data collection techniques within the framework of a heuristic approach, one of the types of qualitative research. The data for this study were obtained using an interview form composed of semi-structured and open-ended questions. The interviews were conducted face-to-face in environments chosen by the participants, adhering to the principle of voluntarism. For the analysis of the collected data, content analysis was employed. The information gathered from the interviews was transcribed by the researcher during the sessions. The data were subjected to simple coding, and the codes obtained through this process were categorized. Themes appropriate to these categories were determined, and content analyses were conducted. The study's findings revealed that cancer patients experienced anxiety from the diagnosis stage onward, with their anxiety levels increasing after the emergence of side effects. Additionally, they faced social issues such as changes in daily habits, dependency on others, decreased performance in professional life, inability to fulfill family responsibilities, and a narrowing of social relationships. Furthermore, it was depicted that patients experienced psychological challenges, including shock, disbelief, denial, rebellion, and anxiety at the diagnosis stage, as well as anger, problems related to physical appearance, hopelessness, and insomnia during the treatment phase.

Keywords: *Radiotherapy, Patient, Cancer, Anxiety*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:231

Manufacturing and Printing of Urogenital System Organs

**Osman GÜNAY^{1✉}, Fahrettin Fatih KESMEZACAR², Yağmur İdil ULUSOY³,
Duygu TUNÇMAN KAYAOKAY⁴, Özge DEMİR⁵, Songül KARAÇAM⁴, Eren
ÖZGÜR⁶, Nami YEYİN⁷, Rabia Lebriz USLU BEŞLİ⁷, Mustafa DEMİR⁷**

¹*Yildiz Technical University, Faculty of Electrical & Electronics, Biomedical Engineering, Istanbul-Türkiye*

²*Istanbul University-Cerrahpas,a, Vocational School of Health Services, Department of Medical Services and Techniques, Medical Monitoring Techniques Pr., Istanbul-Türkiye*

³*Istanbul Bilgi University, Vocational School of Health Services, Medical Imaging Techniques Programme, Istanbul-Türkiye*

⁴*Istanbul University-Cerrahpas,a, Vocational School of Health Services, Department of Medical Services and Techniques, Radiotherapy Pr., Istanbul-Türkiye*

⁵*Istanbul University-Cerrahpaşa, Engineering Faculty, Chemical Engineering Department, Avcılar 34320, Istanbul-Turkey*

⁶*Istanbul Training and Research Hospital, Radiology Department, Istanbul, Türkiye*

⁷*Istanbul University- Cerrahpasa, Cerrahpasa Faculty of Medicine, Department of Nuclear Medicine, Istanbul-Türkiye*

ABSTRACT

Radiation is commonly used in the medical field, primarily for diagnostic purposes and, in some cases, for therapeutic applications. In hospitals, it is employed in radiology, nuclear medicine, and radiation oncology departments. Unlike other applications, nuclear medicine involves the injection of a radioactive substance directly into the patient's body. This radioactive material disperses throughout the entire body, with a significant portion accumulating in the bladder before being excreted. The radioactive substances collected in the bladder also irradiate the nearby genital organs.

The aim of this study is to design and fabricate models simulating the organs of the urogenital system using three-dimensional (3D) printing technology. In subsequent stages, these printed organs will be assembled into a urogenital system phantom, enabling experimental investigations for various applications in nuclear medicine.

Keywords: *Radiation 1, phantom 2, urogenital 3*

✉ *Corresponding Author Email* : ogunay@yildiz.edu.tr

Abs. No:232

Radon Concentration Variations in the Adalar District, Istanbul

**Osman GÜNAY^{1✉}, Görkem SERBES¹, İsmail CANTÜRK¹, Caner YALÇIN², Mutlu
İÇHEDEF³, Caner TAŞKÖPRÜ³, Murat SAÇ³**

¹*Yildiz Technical University, Faculty of Electrical & Electronics, Biomedical Engineering, Istanbul-
Türkiye*

²*Department of Physics, Kocaeli University, 41001 Izmit, Kocaeli-Türkiye*

³*Ege University Institute of Nuclear Sciences, 35100 Bornova, İzmir-Türkiye*

ABSTRACT

The relationship between radon concentrations and earthquakes has been extensively investigated as radon anomalies are often considered potential precursors of seismic events. Variations in radon levels, particularly sudden increases or decreases in soil gas or groundwater, are attributed to stress accumulation and micro-fracturing processes in the Earth's crust prior to an earthquake. These fractures enhance the migration pathways of radon from deeper layers to the surface, leading to measurable anomalies. Therefore, continuous radon monitoring has become an important tool in seismological studies, aiming to better understand crustal movements and to evaluate the feasibility of radon as a short-term earthquake forecasting parameter. In this study, a continuous radon monitoring station was established in the Adalar district of Istanbul. Radon concentrations were recorded at 10-minute intervals, providing high-resolution temporal data. Along with radon, meteorological parameters such as temperature, pressure, and humidity were simultaneously measured to account for environmental influences. The variations in radon levels over a specific period were systematically observed and analyzed in order to evaluate possible correlations with both atmospheric conditions and seismic activity.

Keywords: *Radon 1, seismic 2, anomalies 3*

✉ *Corresponding Author Email* : ogunay@yildiz.edu.tr

PET/CT versus Conventional Imaging in Cancer Diagnosis: Evidence from a Comprehensive Meta-Analysis

Osman GÜNAY[✉], Ümmühan ZENGİN ÖZER¹, Muhammet Mert ÇELİK¹

¹ *Yıldız Technical University, Biomedical Engineering Department, İstanbul-TÜRKİYE*

ABSTRACT

Accurate and timely diagnosis is essential for effective treatment planning in oncology. Conventional imaging modalities, including magnetic resonance imaging (MRI), bone scintigraphy, and computed tomography (CT), are widely used in the evaluation of prostate and breast cancers; however, their overall diagnostic performance remains limited. This study compared the diagnostic accuracy of positron emission tomography/computed tomography (PET/CT) with conventional imaging techniques and examined the influence of tracer selection (¹¹C-Choline, ¹⁸F-FDG, ¹⁸F-NaF) on diagnostic yield. A comprehensive meta-analysis of 29 studies published after 2010 was conducted. Diagnostic metrics, including sensitivity, specificity, accuracy, positive likelihood ratio (PLR), negative likelihood ratio (NLR), and diagnostic odds ratio (DOR), were systematically assessed. PET/CT demonstrated significantly greater diagnostic accuracy than conventional modalities, with pooled improvements in sensitivity (+13.69%), specificity (+7.30%), and accuracy (+9.72%) (all $p < 0.01$). In prostate cancer, PET/CT showed distinct advantages in sensitivity ($Z=2.819$, $p=0.005$), specificity ($Z=2.275$, $p=0.023$), and accuracy ($Z=3.237$, $p=0.001$). Compared with MRI, PET/CT achieved superior accuracy ($Z=1.956$, $p=0.050$), while relative to bone scintigraphy, it yielded higher accuracy and PLR values. Subgroup analysis indicated that ¹¹C-Choline PET/CT provided the most consistent diagnostic performance, whereas ¹⁸F-FDG and ¹⁸F-NaF showed non-significant trends. PET/CT demonstrates superior diagnostic performance compared with conventional imaging, particularly in prostate cancer. Tracer selection substantially influences diagnostic value, with ¹¹C-Choline providing the most consistent benefit. PET/CT, when combined with appropriate tracer choice, may support more accurate diagnosis and facilitate optimized treatment planning in oncology.

Keywords: *PET/CT; Diagnostic Imaging; Meta-Analysis; Radiopharmaceuticals; Cancer diagnosis*

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

Abs. No:233

Organ-Specific Dosimetry in Ovarian Vein Embolization

**Cemre Serdem BİLİR¹, Osman GÜNAY², Fahrettin Fatih KESMEZACAR³, Özge
COŞKUN SAĞLAM⁴, Berrin YALÇIN⁵, Murat DOĞAN⁶**

¹*Yıldız Technical University, Biomedical Engineering Department, Istanbul-Türkiye*

²*Yıldız Technical University, Department of Biomedical Engineering, Istanbul, Türkiye*

³*Istanbul University-Cerrahpasa, Vocational School of Health Services, Department of Medical
Imaging Techniques, Istanbul, Türkiye*

⁴*Istanbul Bilgi University, Faculty of Health Sciences, Department of Physiotherapy and
Rehabilitation, Istanbul- Türkiye*

⁵*Istanbul Training and Research Hospital, Department of Radiation Oncology, Istanbul- Türkiye*

⁶*Istanbul Training and Research Hospital, Department of Radiology, Istanbul- Türkiye*

Abstract

Transcatheter ovarian vein embolization (TOVE) is an invasive radiological procedure. This procedure is used in the treatment of pelvic congestion syndrome. Even though this procedure offers clinical benefits, this method relies heavily on fluoroscopic imaging, which inevitably reveals not only the targeted vessels but also the surrounding pelvic structures. Distant organs may be exposed to ionizing radiation. Understanding the distribution and magnitude of this exposure is important to minimize potential risks and optimize procedure safety. With this study, a phantom based dosimetric approach was used to evaluate organ specific radiation doses during TOVE under simulated clinical conditions. A phantom was used and thermoluminescent dosimeters (TLDs) were strategically placed at eleven anatomical sites, including both ovaries, various segments of the uterus, bladder, cervix, recto-uterine pouch, vagina and pubic symphysis. Dose measurements were recorded following a standard protocol. The results showed that the pubic symphysis absorbed the highest radiation dose (10.87 mSv), followed by the rectouterine pouch (9.03 mSv) and the corpus uteri (7.63 mSv). The lowest exposure was observed in the bladder region (3.49 mSv). Moreover, the left uterine tube (7.72 mSv) received a slightly higher dose than the right tube (6.78 mSv), this can be attributed to the projection geometry and beam angle during imaging. These findings suggest that radiation exposure during TOVE is significantly influenced by the anatomical location of the organ relative to the treatment field. Data from this phantom model highlight the importance of dose optimization strategies and careful adjustment of imaging parameters to reduce unnecessary exposure. Given that the study simulated bilateral procedures with deliberately increased fluoroscopy, the reported organ doses should be interpreted as upper limit estimates of clinical exposure. These results provide a conservative yet valuable reference for patient safety assessments and underscore the necessity of dose optimization strategies in TOVE.

Keywords: transcatheter ovarian vein embolization, radiation exposure, organ-specific dosimetry, phantom model, thermoluminescent dosimeter, pelvic congestion syndrome.

✉Corresponding Author Email : cemreserdem@gmail.com

Abs. No:120

Influence of Non-Homogeneous Interphases on the Elastic Behavior of Polymer Nanocomposites – A micromechanical Modeling

Salah BOUTALEB^{1✉}, Krimo AZOUAOUI¹, Amar MESBAH¹

¹ *Laboratoire de Mécanique Avancée, Université des Sciences et de la Technologie Houari Boumediene, Faculté de Génie Mécanique et Génie des Procédés, Algiers-ALGERIA*

ABSTRACT

This study investigates the mechanical behavior of polymer matrix nanocomposites reinforced with spherical nanoparticles, with particular focus on the role of a non-homogeneous interphase region. The interphase, characterized by spatially varying properties, significantly influences the effective elastic limit and stiffness of the composite. A micromechanical modeling approach is employed to capture the gradation of mechanical properties across the interphase, enabling a detailed evaluation of the effective behavior resulting from the interaction between the dispersed nanoparticles and the surrounding polymer matrix.

Keywords: *Polymer nanocomposites, Micromechanical modeling, Non-homogeneous interphase, Elastic properties, Nanoparticle reinforcement.*

✉ *Corresponding Author Email* : salah.boutaleb@usthb.edu.dz

Abs. No:196

Multiphysics Micromechanical Modeling of PVDF/BaTiO₃ Composites with Strain-Induced Phase Transformation

Fateh Enouar MAMACHE¹, Amar MESBAH^{1✉}

¹ *Laboratoire de Mécanique Avancée, Université des Sciences et de la Technologie Houari Boumediene, Faculté de Génie Mécanique et Génie des Procédés, Algiers-ALGERIA*

ABSTRACT

This paper proposes a micromechanical model to predict the electromechanical behavior of PVDF-based piezoelectric composites, accounting for two key microstructural phenomena: the strain-induced $\alpha \rightarrow \beta$ phase transition and interfacial damage between the PVDF matrix and BaTiO₃ particles. PVDF, a semi-crystalline piezoelectric polymer, exhibits tunable properties through mechanical deformation and particle reinforcement. The model is developed within the framework of Eshelby-type homogenization theory, incorporating Avrami kinetics to describe the phase transformation and Weibull statistics to model interfacial debonding. This approach enables a comprehensive constitutive description of the composite's behavior. The model is validated against experimental data for PVDF composites with various BaTiO₃ contents and successfully captures the effects of temperature, strain, and filler concentration on the piezoelectric coefficient, dielectric constant, and stiffness. It provides valuable insights into the individual and combined roles of phase transformation and particle–matrix interactions, offering a robust tool for the design and optimization of multifunctional piezo-composites.

Keywords: *PVDF composites, Piezoelectric materials, Micromechanical modeling, Weibull statistics, Eshelby homogenization.*

✉ Corresponding Author Email : ammar_mesbah@yahoo.fr

THERAPEUTIC EDUCATION OF PATIENTS IN PHARMACIES:CURRENT STATES.

**Dr.GUERFI. Bahdja.¹, KHADER.N², Bellahcene. I¹, ZOUANLA³, HADHOUM N⁴,
BENZIANE. L¹, GUERCH. A¹, HAMLAOULS¹.HADJADJ AOUL.F. Z⁵**

¹⁻ Medicinal Chemistry Laboratory, Faculty of Medicine, University Saad Dahlab of Blida 1, BP 270 Soumaa, 09000, Blida, Algeria.

²⁻ Biophysics laboratory, Faculty of Medicine, University Saad Dahlab of Blida 1, BP 270 Soumaa, 09000, Blida, Algeria.

³⁻ Toxicology laboratory, Faculty of Medicine, University Saad Dahlab of Blida 1, BP 270 Soumaa, 09000, Blida, Algeria.

⁴⁻ Medicinal Chemistry Laboratory, Faculty of Medicine, University Mouloud mammeri – Tizi ouzou. Algeria.

⁵⁻ Medicinal Chemistry Laboratory, Faculty of Medicine, University Ben youcef Ben Khedda - Algiers. Algeria

INTRODUCTION:

Therapeutic education is an essential component of the management of patients suffering from chronic diseases, with the aim of improving their autonomy and quality of life. But what about TPE in the day-to-day practice of dispensing pharmacists in Algeria? Are they properly trained to carry out this task? Do they have the necessary tools and sources?

METHODS:

Our study is based on a survey of dispensing pharmacists, using a questionnaire to assess their knowledge of TPE: its objectives, the different tools used, the role of dispensing pharmacists in TVE in Algeria and patients' reactions, etc.

RESULTS:

The results revealed that 72.50% of respondents claim to know what therapeutic patient education is. Of these, 94.10% realized its importance and recognized that pharmacists have a very important role to play in TPE.

With regard to the best-known objectives of TVE, the majority (80.4%) agree that therapeutic education aims primarily to improve patients' lives.

Unfortunately, only 27.8% of dispensing pharmacists provide TVE sessions to help patients acquire or maintain the skills to better manage their disease on a daily basis, while 72.2% of pharmacists do not.

CONCLUSION:

This study highlights the growing importance of therapeutic education as an essential component of pharmacy services. However, gaps remain in terms of training, resources and interprofessional collaboration, which sometimes limit the effectiveness and scope of therapeutic education practice.

Keywords: *Therapeutic education, patient, retail pharmacist.*

✉ **Corresponding Author Email** : bahdja.guerfi@gmail.com

Abs. No:141

Design of permanent magnets for sinusoidal waveform of airgap induction in slotless synchronous machines

**Youcef BOUTORA^{1✉}, Safia AIMEUR¹, Nouredine TAKORABET², Saliha
BOUTORA³**

¹ Mouloud MAMMERI University, Laboratoire de Génie Electrique LGE, Tizi Ouzou - ALGERIA

² University of Lorraine, GREEN - ENSEM, Nancy - FRANCE

³ M'hamed BOUGUERRA University, Boumerdes - ALGERIA

ABSTRACT

The design of electrical machines for high-speed applications includes high energy density permanent magnet machines. These machines offer the advantage of compactness. By suppressing the stator slots, the cogging torque is eliminated, which significantly reduces torque ripples, making the slotless machine a silent machine. However, a sinusoidal waveform of the induction in the air gap reduces torque ripples even further. The aim of this paper is to implement an analytical model for calculating the field in the form of harmonics and, depending on the aperture and the number of bar magnets, to decide which structure to choose.

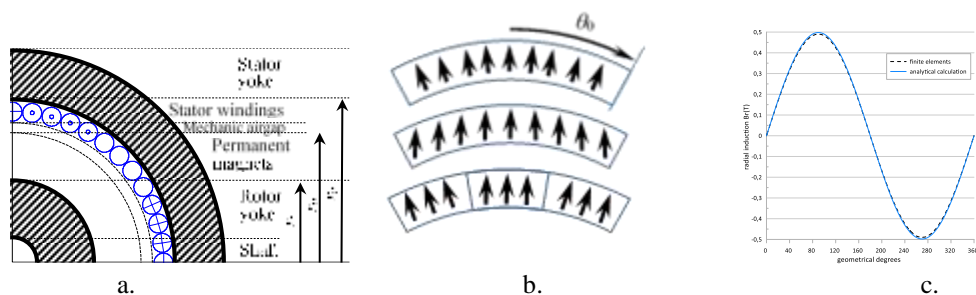


Figure 1. a. Structure of slotless machine

b. Radial, radial parallel and radial parallel bars structures studied

c. Normal induction waveform in airgap for a bipolar radial parallel magnetized structure.

Primary results are compared successfully for these obtained by a free code finite element method (femm) and experiment results. We calculate then for each configuration possible of permanent magnet switch ($p\theta_0$) fundamental B_{n1} and total harmonic distortion THD. This last value is calculated for all odd harmonics until harmonic 25 without these are multiple of 3(3, 9, 15 and 21).

In case of bipolar machine, a perfect sinusoidal distribution of flux density normal component is obtained with radial parallel magnetization, but with a lower B_{n1} than all of possible

**12th INTERNATIONAL CONFERENCE ON COMPUTATIONAL AND
EXPERIMENTAL SCIENCE AND ENGINEERING
(ICCESEN-2025)**

17-20 October 2025, ANTALYA -TURKEY

structures. For segmented tile magnets, the two bars magnets with adequate aperture is recommended for obtaining a nearest distribution to sinusoidal signal.

Keywords: *slotless machines, analytical calculation, finite elements method*

✉ *Corresponding Author Email* : youcef.boutora@ummto.dz

Abs. No:225

Mechanical and microstructural study of silica intended for photovoltaic silicon production

**KHELOUFI Abdelkrim¹, [✉] BOBOCIOIU Ema², KERKAR Fouad¹, ANAS
BOUSSAA Sabiha¹, NAAS Abderrahmane¹, HAZMOUNE Abdessalam¹**

¹ Centre de Recherche en Technologie des Semi-conducteurs pour l'Energétique

²Ecole Normale Supérieure de Lyon, France

ABSTRACT

The solar grade silicon production technology consists of three successive stages: the ore and its treatment, the reduction of the silica by carbon to obtain metallurgical grade silicon and the purification of the metallurgical grade silicon (MG-Si) for the Obtaining solar grade silicon (SoG-Si).

This work is focused on the valorization of raw silica from Tebessa region quartz, and Mizrana region sandstone deposits as a potential mineral resources with high added value as a raw material for photovoltaic silicon production.

For this, samples were carried out a characterization using optical microscopy with reflected and transmitted light, Raman spectroscopy to define the mineral structures and textures of the silica and also to find possible inter- or intra-crystalline impurities in the samples. When the optical analysis was not sufficient, we choose mineral inclusions on the thin sections for examination by Raman spectroscopy in order to determine the nature of the impurities.

Moreover, Vickers hardness tests were used to determine the mechanical characteristics of the studied silica in order to find a correlations chip between the raw material mineral structure and the hardness value of silica measured. This investigation was highlighted to evaluate the behavior silica in the process of photovoltaic silicon production.

The analysis results on samples showed the presence of different defects, microstructural, fluid and mineral inclusions, micro cracks as well as pores. These impurities are mostly founded on the surface where others are embedded in the crystal lattice.

The microscopic characterization results he completed by the Vickers hardness tests have shown that the studied raw material has a very appreciable purity (~ 97% SiO₂) and high-mechanical characteristic performances, mainly for the Tebessa deposit quartz. This, is suitable to be used as raw material in the carbothermic process and the production of high quality Algerian silicon.

Keywords: : Silica , Characterization, defects, Silicon

[✉]Corresponding Author Email : kheloufiabdelkrim@crtse.dz

Abs. No:226

Valorisation of Algerian quartz vein deposits as source of energy

KHELOUFI Abdelkrim^{1,✉}, BOBOCIOIU Ema², KERKAR Fouad¹, ANAS

BOUSSAA Sabiha¹, HAZMOUNE Abdessalam¹, NAAS Abderrahmane¹

1 Centre de Recherche en Technologie des Semi-conducteurs pour l'Energétique

2Ecole Normale Supérieure de Lyon, France

Abstract

The use of advanced technologies in the latest years is responsible of incessant demands of ultrapure mineral raw materials [1, 2]. In this context, some raw material destined for industries with significant added value must be pure enough in order to achieve the required technological and economic objectives. Hence the importance of the valorization of high-purity silica deposits as a main source for photovoltaic domain, optics, electromagnetic materials, laser crystal synthesis and other advanced techniques [3-7]. In this context, specific characterization technics following by an enrichment processes based on the Information Geographic System (IGS) through ARGIS software in order to identify all silica deposits in Algeria were used. For this three important silica deposits were taken into account. The Tebessa, Draïssa and Timimoun quartz deposits with silica initial average content of 97%, 96% and 97% SiO₂ respectively. For this, different minerals processing technics were used based on silica mineralogical aspects. For the Tebessa quartz deposit an acid leaching process was used which has made it possible to increase the silica content up to 99.9%. Regarding Draïssa deposit using reverse flotation grows the SiO₂ concentration to 99%. For Timimoun deposit we obtained a pure silica nearly 99.2 % SiO₂ using a direct flotation. These results serve as basis for Algerian quartz valorization for energy as products for metallurgical industry as well as for photovoltaïque and optical applications.

Keywords: : *Quartz vein, Chararzeization, Mineral processing, Pure Silica*

✉Corresponding Author Email : kheloufiabdelkrim@crtse.dz

References

- [1] Désindes. L. "Silice ultra-pure pour l'électrometallurgie : gîtologie et caractéristiques physiques et chimiques du minerai quartz ", septembre 2004, 433. [2] BF Manel, W Gallala, A Saadi Technology Quartz sand beneficiation using magnetic and electrostatic separation to glass industries. Journal of New technology and materials.06,01, 2016, 60-72.
- [3] Kheloufi, A., Bobocioiu, E., Kerkar, F., Kefai, A., Anas, S., Medjahed, S.A., Belkacem, Y., Keffous, A., 2017. Optical and spectroscopic characterizations of Algerian silica raw material to predict high quality solar-grade silicon J. Opt. Mat., 65, 142.-149. <https://doi.org/10.1016/j.optmat.2016.09.063>.
- [4] Department of Geology and minerals resources Engeneering, IGBt, NTNU. (Norway). Strategic University Programme at Department of Geology and Minerals Resources Engineering// "The value chain from mineral deposit to beneficiated product with emphasis on quartz" (2005), pp 4-10.
- [5] Malvik, T., and Lund, B. 2021: Problems involved with quartzite as a raw material for FeSi and Si metal production. Process Mineralogy IX, The Minerals, Metals & Materials Society, IX, 499-508.
- [6] Mitra, S. 2022: Kinetics of Quartz-Cristobalite Transformation. Brit Ceram TransJ, 76, 71-74.
- [7] S Medjahed, A Kheloufi, E Bobocioiu, A Kefai, F Kerkar, K Lebbou Quartz Ore Beneficiation by Reverse Flotation for Silicon Production Silicon, 1-11, IS-OM8, 9-14 june, Wroclaw, Polan

Abs. No:296

Doğal Su Kaynaklarındaki Toplam Organik Karbon Değişimlerinin Mevsimsel Analizi

Fatma Gamze Tan Kantar, Zafer Yazıcıgil

Selcuk University, Konya-Turkey

Abstract

Tatlı su kaynakları, küresel karbon döngüsünde önemli bir role sahip olmasına rağmen, bu sistemlerdeki toplam organik karbon (TOK) dinamikleri özellikle ılıman ve yarı kurak bölgeler için yeterince ortaya konulamamıştır. Literatürün ağırlıklı olarak Boreal ve Arktik bölgelerde yoğunlaşması, Türkiye gibi farklı hidrolojik ve iklimsel koşullara sahip bölgelerde TOK'un mevsimsel değişimine ilişkin önemli bir bilgi boşluğu oluşturmıştır (Tranvik et al., 2009). İklim değişikliği, arazi kullanımındaki değişimler ve artan antropojenik baskılar, tatlı su ekosistemlerinde organik madde taşınımı ve dönüşüm süreçlerini etkileyerek su kalitesi üzerinde belirleyici olmaktadır (Battin et al., 2008). Özellikle yaz aylarında görülen kuraklık, yükselen su sıcaklıkları ve artan mikrobiyal aktivitenin organik karbon dengesi üzerindeki etkilerinin değerlendirilmesi büyük önem taşımaktadır. Bu çalışmanın amacı, Marmara ve Ege bölgeleri arasında yer alan Balıkesir ili ve çevresindeki doğal tatlı su kaynaklarında TOK konsantrasyonlarının mevsimsel değişimini belirlemek ve bu değişimi su kalitesi açısından değerlendirmektir. Çalışma kapsamında, farklı çevresel özelliklere sahip su kaynaklarından dört mevsimi temsil edecek şekilde örnekleme yapılmıştır. Numune alma işlemleri TS EN ISO 5667 ve TS EN ISO 5667-3 standartlarına uygun olarak gerçekleştirilmiş; numuneler cam şişelerde toplanarak soğuk zincir altında laboratuvara ulaştırılmıştır. Saha ölçümleri sırasında sıcaklık, pH ve elektriksel iletkenlik gibi temel fizikokimyasal parametreler yerinde ölçülmüştür. TOK analizleri, yanma prensibine dayalı TOC analiz cihazı kullanılarak gerçekleştirilmiştir. Yanma-NDIR tabanlı bu yöntem, doğal sularda düşük seviyelerdeki organik karbonun hassas ve güvenilir şekilde belirlenmesini sağlamaktadır (Sharp, 2002). Analiz sonuçları mg/L cinsinden ifade edilmiş; veriler mevsimlere göre karşılaştırılarak istatistiksel olarak değerlendirilmiş ve anlamlılık düzeyi $p < 0,05$ olarak kabul edilmiştir. Bu çalışma, Türkiye'nin ılıman-yarı kurak iklim koşullarındaki tatlı su sistemlerinde TOK'un mevsimsel değişkenliğini ortaya koyarak su kalitesi değerlendirmelerine karbon temelli bir bakış açısı kazandırmayı hedeflemektedir. Elde edilen bulguların, tatlı su ekosistemlerinde organik madde döngüsünün anlaşılmasına ve sürdürülebilir su kaynakları yönetimine katkı sağlaması beklenmektedir.

Not: Bu çalışma S. Ü. Fen Bilimleri Enstitüsü'nde Yüksek Lisans tez çalışması olarak yapılmıştır.

Kaynaklar:

1. Tranvik, L. J., et al. (2009). Lakes and reservoirs as regulators of carbon cycling and climate. *Limnology and Oceanography*, 54(6), 2298–2314.
2. Battin, T. J., et al. (2008). Biophysical controls on organic carbon fluxes in fluvial networks. *Nature Geoscience*, 1, 95–100.
3. Sharp, J. H. (2002). Analytical methods for total organic carbon in seawater. *Marine Chemistry*, 77(4), 239–254.

Abs. No:297

Mikrodalga destekli s- Triazin Bileşiklerin Sentezi ve Elektrot Yüzeyine Modifiye Edilmesi

Aşkın Toka, Zafer Yazıcıgil
Selcuk University, Konya-Turkey

Abstract

Nüfusun artması ve teknolojinin gelişmesiyle birlikte çevre kirliliği doğanın dengesini bozan ve canlı yaşamını tehdit eden unsurların arasında ilk sırada yerini alan, önemli bir sorun haline gelmiştir [1]. Çoğunluğu endüstriyel prosesler neticesinde olmak üzere, enerji santralleri, evsel atıklar, hayvancılık ve zirai uygulamalar sonucunda oluşan çevre sorunları arasında su kirliliği büyük bir öneme sahiptir. Canlıların vazgeçilmez yaşam kaynağının su olduğu düşünüldüğünden, bilim adamlarınca insan sağlığını etkileyen en önemli sorunlardan biri olan su kirliliği ile mücadele edecek pek çok yöntem geliştirilmiştir [2]. Çevre kirliliğinin önlenmesi kadar bu sorunu ortadan kaldırmada kullanılacak tekniklerin belirlenmesi için kirliliğe neden olan etmenlerin kalitatif ve kantitatif tayini önem arz etmektedir. Bu doğrultuda yapılması planlanan proje çalışmasında, metallerle kompleks yapabilmeye özelliğine sahip, şelat halkası üye sayısı değiştirilerek kompleks kararlılığı artırılıp azaltılabilen [3], trimer yapısı ile her yönden farklı bileşikler oluşturarak fonksiyonlandırılmaya açık heterosiklik yapısı ile hem inorganik hem de organik kimyada son yıllarda önem kazanmış olan s-triazin ve bileşiklerinin çevre dostu olan greenchemistry yöntemi sentezlerinin gerçekleştirilmesi [4], elde edilen bileşiklerin karbon elektrot yüzeylerine modifiye edilmesi ve bu elektrot yüzeylerinin çevresel kirliliğe neden olan metallerin kalitatif ve kantitatif tayininde kullanılması planlanmaktadır [5].

Not: Bu çalışma S. Ü. Fen Bilimleri Enstitüsü'nde Yüksek Lisans tez çalışması olarak yapılmıştır.

Kaynaklar:

1. Ali, M. B., Chabanne, R. B., Vocanson, F., Dridi, C., Jaffrezie, N., Lamartine, R., "Comparison study of evaporated thiacalix[4]arene thin films on gold substrates as copper ion sensing", Thin Solid Films, 495, 368-371, 2006.
2. Arya, S. K., Prusty, A. K., Singh, S. P., Solanki, P. R., Pandey, M. K., Datta, M., Malhotra, B. D., "Cholesterol biosensor based on N-(2-aminoethyl)-3-aminopropyl-trimethoxysilane self-assembled monolayer", Anal. Biochem. 363, 210-218, 2007.
3. Arya, S. K., Solanki, P. R., Datta, M., Malhotra, B. D., "Recent advances in self-assembled monolayers based biomolecular electronic devices", Biosens. Bioelectron. 24, 2810-2817, 2009.
4. Asav, E., Akyilmaz, E., "Preparation and optimization of a bienzymic biosensor based on self-assembled monolayer modified gold electrode for alcohol and glucose detection", Biosens. Bioelectron., 25, 1014-1018, 2010.
5. Campuzano, S., Gomez, E. V., Herranz, M. A., Pedrero, M., Pingarron, J. M., "Development of amperometric biosensors using thiolated tetrathiafulvalene-derivatised self-assembled monolayer modified electrodes", Sensor Actuat. B-Chem., 134, 974-980, 2008.

Abs. No:298

Synthesis of graphene using the hummers method

Dilan BUZ ÇELİK^{1✉}, Nalan ÇİÇEK BEZİR²

¹ *Suleyman Demirel University, Physics. Department, Isparta, Turkey * Corresponding author:*

² *Suleyman Demirel University, Physics. Department, Isparta, Turkey*

Abstract

Graphene is a two-dimensional carbon allotrope that has attracted significant attention in materials science and nanotechnology due to its exceptional electrical, mechanical, and thermal properties. Despite its wide range of potential applications, large-scale and cost-effective production of graphene remains a major challenge. In this thesis, graphene oxide (GO) and reduced graphene oxide (rGO, referred to as graphene in this study) were synthesized from graphite using the chemical exfoliation-based Hummers method. In the experimental study, graphene oxide was synthesized via the Hummers method, and the obtained graphene oxide was subsequently converted into a graphene-like structure through chemical reduction. The structural, chemical, and morphological properties of graphite, graphene oxide, and graphene samples were systematically investigated using X-ray diffraction (XRD), Raman spectroscopy, Fourier transform infrared spectroscopy (FT-IR), and scanning electron microscopy (SEM). XRD results revealed a significant increase in interlayer spacing during the transformation from graphite to graphene oxide, followed by a partial decrease after reduction, indicating the formation of a graphene-like structure. Raman spectroscopy confirmed the presence of oxidation-induced defects in graphene oxide and the partial restoration of the sp² carbon network after reduction. FT-IR analysis verified the presence of oxygen-containing functional groups in graphene oxide and their substantial removal following the reduction process. SEM images clearly demonstrated the morphological evolution from compact graphite layers to wrinkled graphene oxide sheets and partially restacked graphene layers. Overall, the results indicate that graphene oxide was successfully synthesized using the Hummers method and subsequently reduced to obtain a graphene-like structure. This study is expected to contribute to the development of low-cost and scalable graphene production methods.

Keywords: *Graphene, graphene oxide, Hummers method, chemical exfoliation, reduced graphene oxide.*

✉ *Corresponding Author Email : dilanbuzz@gmail.com*